




2026

Field-Proven Strength.

Measurement • Protection • Advancement


Since 1935



In our mission to provide measurement technologies that protect the safety of society, we seek to contribute to the advancement of a brighter and more prosperous future.

Hioki's measurement technology is widely used in the maintenance, repair and operation of factories, businesses and infrastructures, contributing to the safety and security of our daily lives.

We also support the development of next generation technologies in the automotive and new energy sectors by delivering high quality instruments at a reasonable cost.

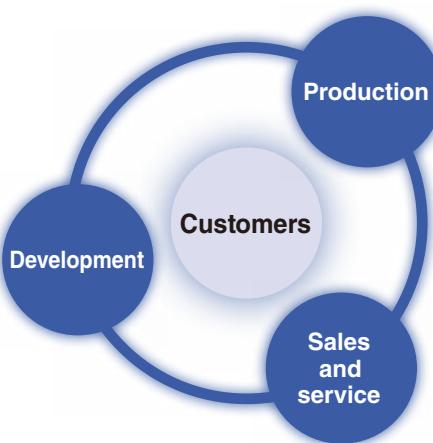

Founded in 1935, Hioki has grown to become a world leader in providing consistent delivery of tests and measuring instruments. By integrating both R&D and manufacturing in a central facility, we succeed in implementing a fully sustainable end-to-end product innovation life cycle to deliver instruments characterized by precision, safety, and quality to customers around the world.

HIOKI, an R&D-focused company

Technology advances on a daily basis, making possible safer and more comfortable human lifestyles and helping make dreams come true. The measuring instruments that underpin these advances also continue to evolve. To develop electrical measuring instruments that meet the changing needs of our times, one-third of all HIOKI employees work in research and development, an area where we invest approximately 10% of all revenue.

Pursuing agile production

HIOKI works to implement optimal production structures that are capable of meeting changing market needs with high-quality products. Due to the nature of electrical measuring instruments, which serve as yardsticks for measuring electricity, it is necessary to ensure a high level of quality in their production. Working with the cooperation of suppliers, we continuously strive to ensure our manufacturing operations conform to the world's highest standards of product quality.

Practicing customer-centric sales

Working with distributors, we actively visit customers to resolve their concerns. Information obtained during these visits is also utilized in product development, laying the groundwork for our ability to create products that satisfy our customers.

Contents

About the Catalog	p. 2
Applications Factory	p. 4
Applications Data Centers	p. 6
Applications Residences & Commercial Buildings	p. 8
Manage Measurement Data on Tablets and PCs	p. 10
Calibration and Repair Service	p. 60

Clamp Meters	pp. 12-21	Clamp
Insulation Testers	pp. 22-27	Insulation
DMMs	pp. 28-35	Tester
Phase Detectors Voltage Detectors	pp. 36-37	Detectors
Earth Testers	pp. 38-43	Earth
Power Quality Analyzers	pp. 44-45	Power quality
Power Loggers	pp. 46-47	Power loggers
Battery Testers	pp. 50-51	Battery
PV Maintenance	pp. 52-53	PV
Data Loggers	pp. 54-56	Logger
LAN Cable Testers	p. 57	LAN
Lux Testers	p. 58	Lux
Temperature Testers	p. 58	Temperature
Resistance Meters	p. 59	Resistance

About the Catalog

About the Marks

	Compliant with CE
	Compliant with CSA
	New product



*Android, Google Play and the Google Play logo are trademarks of Google Inc.

*iOS is a registered trademark of Cisco Technology, Inc. and/or its affiliates in the United States and certain other countries.

*iPhone, iPad, iPad mini, iPad Pro and iPod touch are trademarks of Apple Inc.

*Apple and the Apple logo are trademarks of Apple Inc. App Store is a service mark of Apple Inc.

*Microsoft, Windows, Windows 11, Windows 10, and Excel are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.

*Company names and Product names appearing in this catalog are trademarks or registered trademarks of various companies.

*The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by HiOKI E.E. CORPORATION is under license.

*For the latest information about countries and regions where wireless operation is currently supported, please visit the Hioki website.



	Safety standard measurement categories*
	Drop proof Robust design capable of withstanding a drop from a height of 1 m onto concrete
	Backlight
	Auto power OFF Automatically turns off after a certain time
	Display hold
	True RMS True RMS measurement for accurate measurement of even distorted current waveforms
	Low-pass filter Cuts high frequency content to provide stable numerical values for measurement
	AUTO AC/DC Automatically detects and measures AC and DC voltage
	Decibel conversion Displays AC voltage measurements converted to decibel values (dbm/dbv)
	MAX/MIN/AVG value* Displays the maximum, minimum, and average of the displayed values
	Peak measurement* Displays the wave maximum and minimum peak values
	Relative display Pressing the REL button displays subsequent measurements as values relative to that displayed when the button was pressed
	Current sensor can be connected
	Flexible current sensor can be connected

	AC voltage
	DC voltage
	DCV + ACV
	Frequency
	Resistance
	Capacitance
	Temperature
	ACA current
	DCA current
	DCA + ACA
	DC Power
	Continuity check Buzzer sounds when continuity is detected
	Diode check Displays voltage if in the correct direction, and OVER if in the reverse direction
	Voltage detection Buzzer sounds when AC voltage is detected
	Inrush (rush current) Measures inrush current when power is turned on, etc.

*For more detailed information, please refer to the next page.

Measurement Category and Anticipated Transient Overvoltage

Under safety standards (EN61010 Series, JIS C 1010 Series), measurement is classified into Categories II to IV according to the measurement point's rated voltage to ground, current capacity (size of current that flows in a short-circuit fault), etc., and the transient overvoltage that occurs at the measurement point.

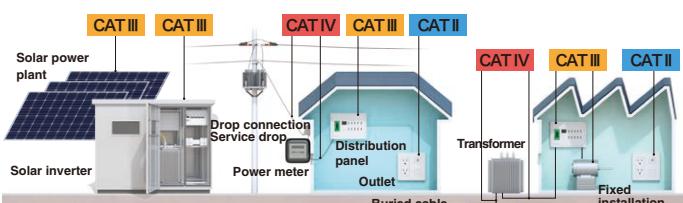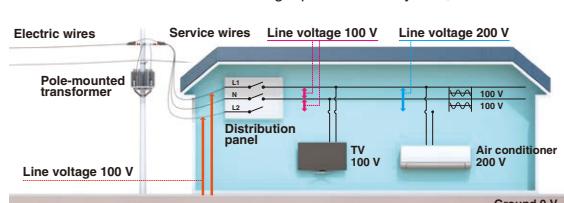Measurement category		Rated voltage to ground	
			
CAT II		Measurement at a point from the power plug to the equipment's power circuits, where equipment is directly connected to an outlet.	
CAT III		Measurement at a point on the power distribution cabling or power supply circuits, or at a point from the distribution panel to a distribution terminal behind an outlet, where equipment (for example a fixed installation) takes electricity directly from a distribution panel.	
CAT IV		Measurement at a point on a service drop to a building, or on the line from the drop connection to the power meter or distribution panel.	


Anticipated Transient Overvoltage			
Rated voltage to ground	Transient overvoltage	CAT II	CAT III
		CAT IV	
300 V	2500 V	4000 V	6000 V
600 V	4000 V	6000 V	8000 V
1000 V	6000 V	8000 V	12000 V
1500 V	8000 V	10000 V	15000 V
2000 V	12000 V	15000 V	18000 V

Marks	
CAT IV	600 V
Measurement Category	Rated voltage to ground

Never measure a measurement point with a higher category number than the category indicated on the measuring instrument. Doing so could lead to a serious accident such as electric shock.


Rectification Methods: True RMS and Mean

A measuring instrument uses one of two rectification methods, "True RMS" or "Mean." Using mean rectification assumes that the signal is based on a sine wave without distortions in order to calculate the value. Distorted waveforms cannot be measured accurately using this method. As the performance of equipment increases, so do distorted waveforms. In order to accurately measure in these situations, using the True RMS method is necessary.

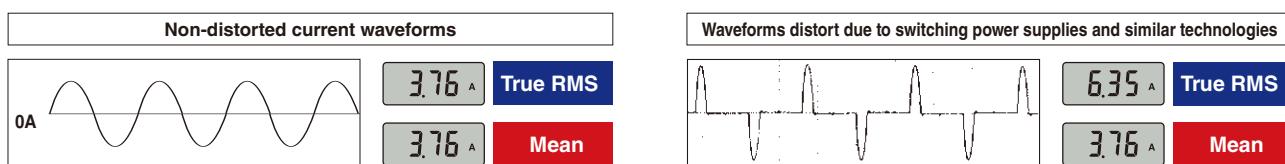


Low-Pass Filter Reduces the Effects of Harmonics and Measures the Fundamental Wave Component Accurately

Switching power supplies and the secondary side of inverters include harmonic components. Waveforms containing harmonics are distorted and difficult to measure with accuracy. By using a low-pass filter to remove harmonic components, accurate measurement values can be obtained.

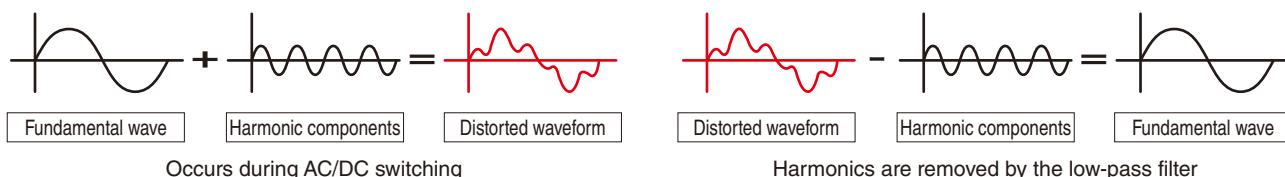


MAX/MIN/AVG/PEAK value

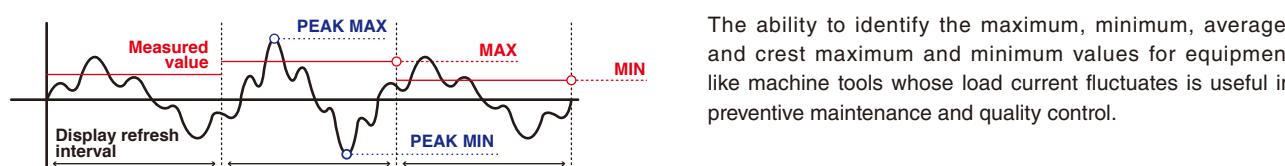

The ability to identify the maximum, minimum, average, and crest maximum and minimum values for equipment like machine tools whose load current fluctuates is useful in preventive maintenance and quality control.

Applications Factory

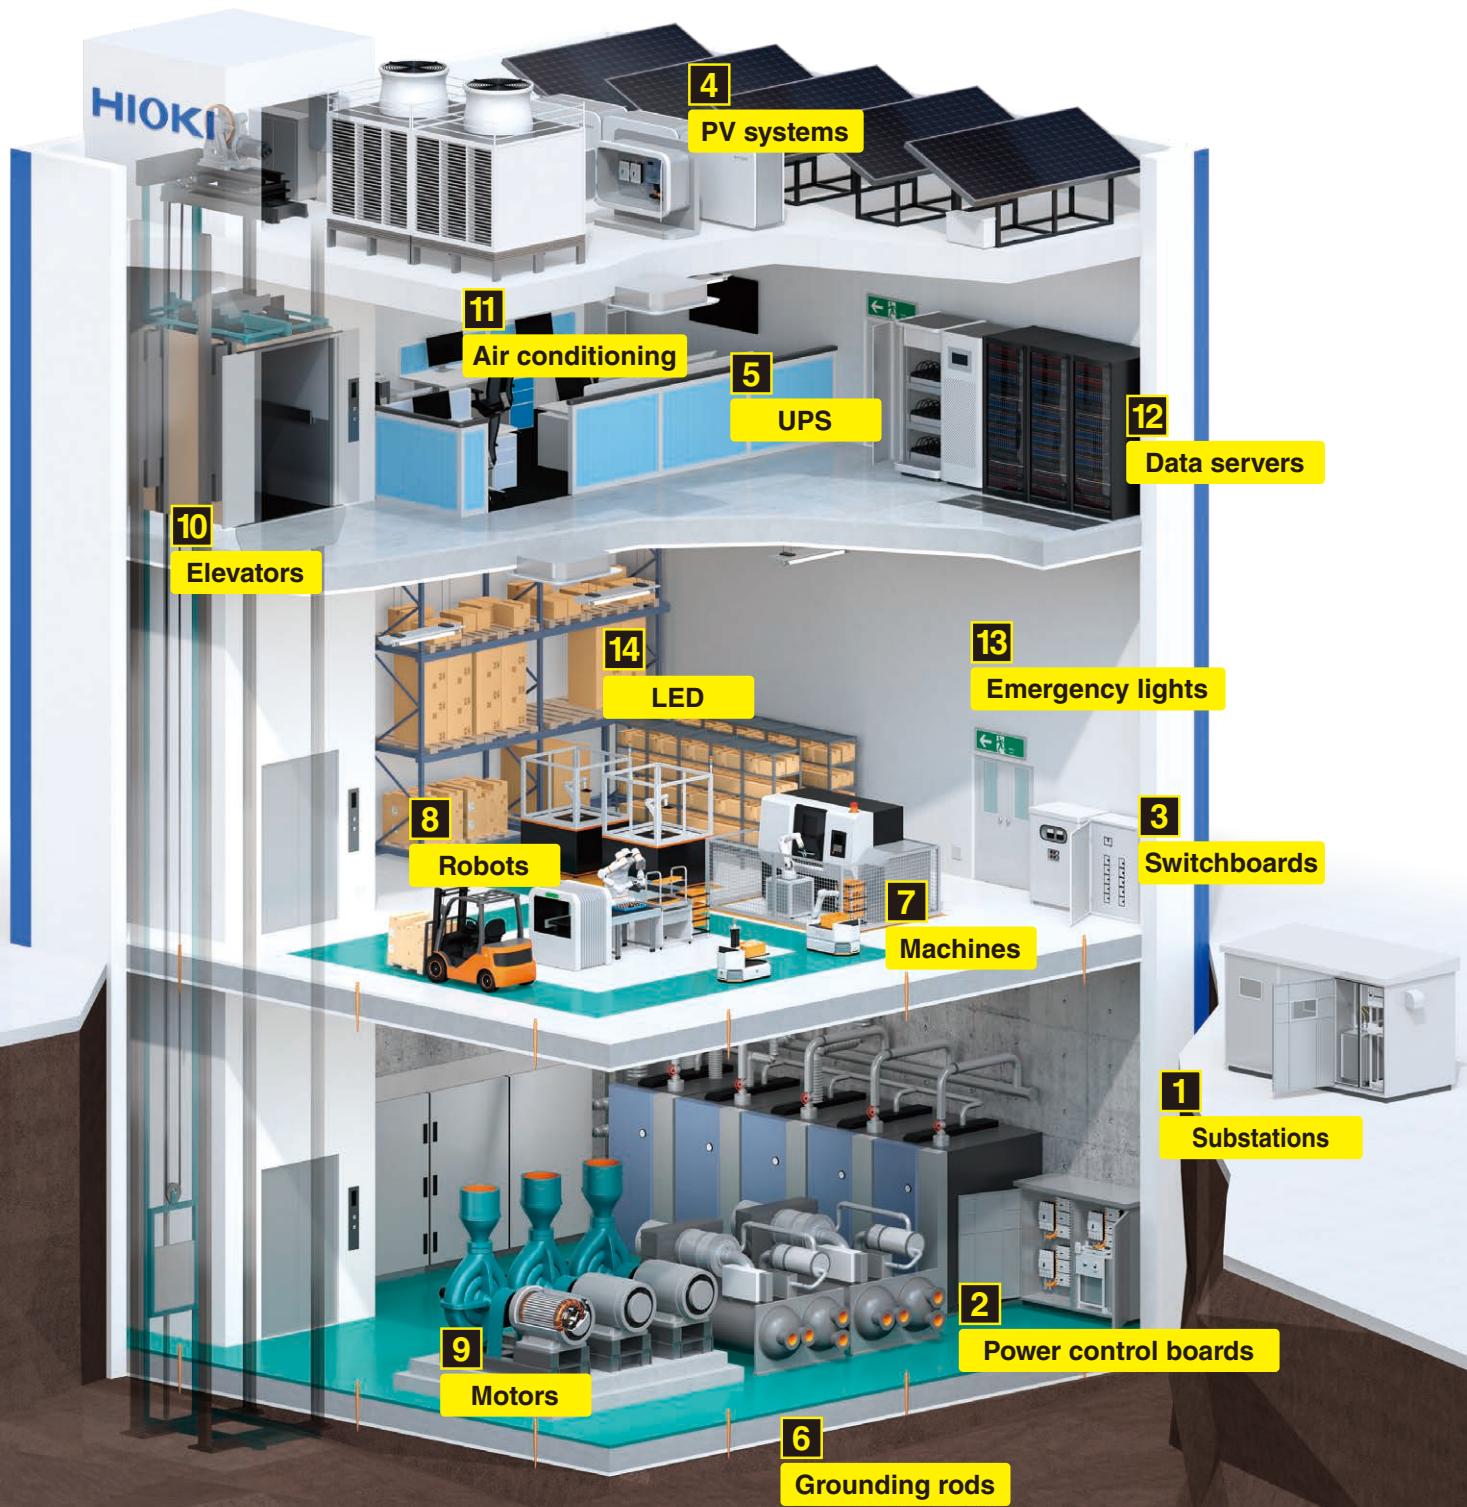

1 2 3**Power Receiving and Transforming Equipment, Power Control Boards, Switchboards**

Verify phase rotation	Test insulation	Test supply voltage	Verify load current	Detect leakage current	Detect electrical disturbances, Analyze power quality	Record and analyze electrical consumption	Test 5 kV insulation
							

p.36

p.22

p.28

p.12

p.12

p.44

p.46

p.22

4**PV Systems**

Test bypass diodes	Test PV insulation	Verify string voltage	Verify string voltage	Verify string current	Test battery resistance and voltage	Verify grounding
						

p.52

p.22

p.28

p.12

p.12

p.50

p.38

7 8 9**Machines, Robots, Motors****10****Elevators**

Test supply voltage	Test load current	Check temperature	Verify motor insulation	Test supply voltage	Test load current	Verify phase rotation
						

p.28

p.12

p.58

p.22

p.28

p.12

p.36

11**Air Conditioning****12****Servers****13 14****Emergency Lights**

Check temperature and humidity	Check temperature	Test insulation	Test supply voltage	Test load current	Verify LAN wiring	Measure illuminance
						

p.54

p.58

p.22


p.28

p.12

p.57

p.58

Applications Data Centers

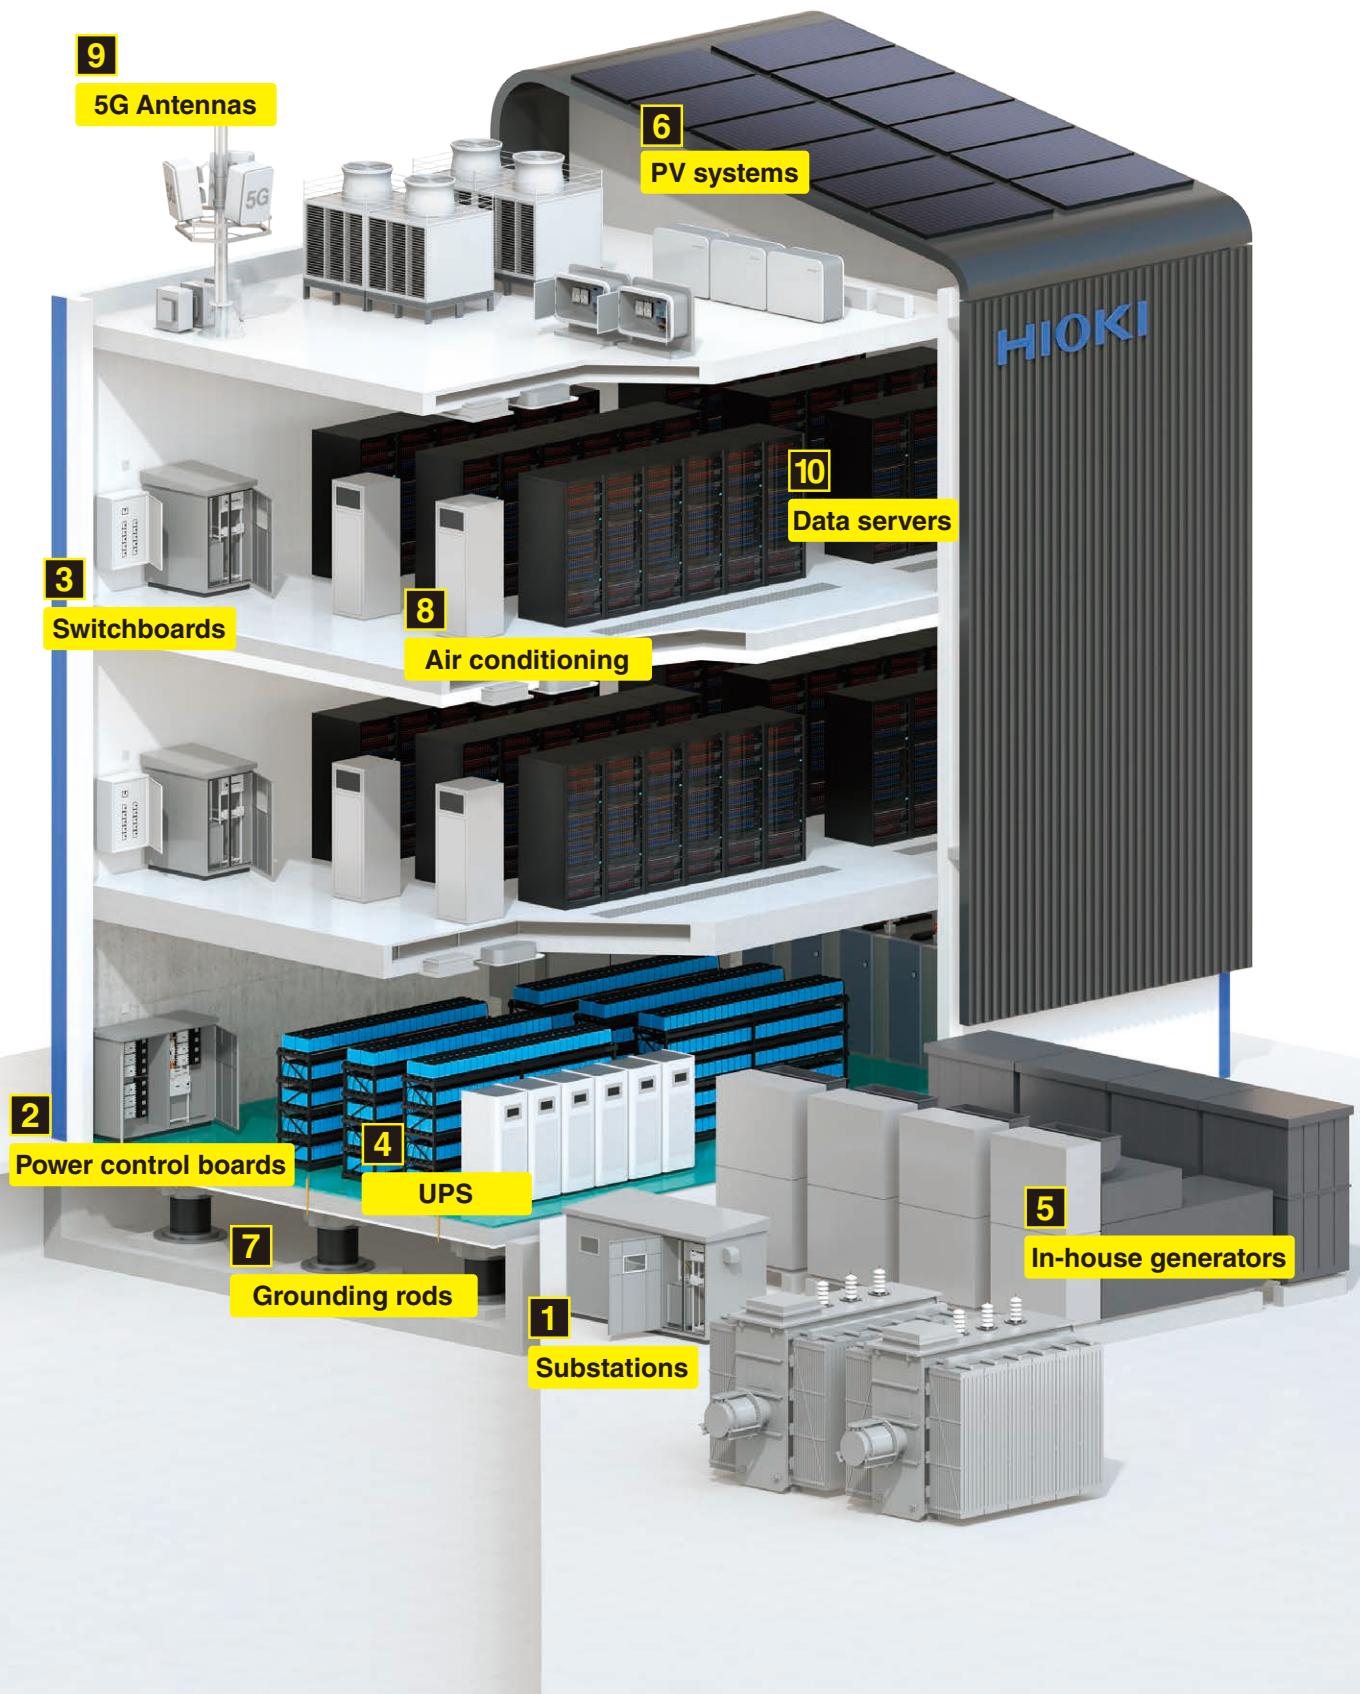

1 2 3

Power Receiving and Transforming Equipment, Power Control Boards, Switchboards

Verify phase rotation	Test insulation	Test supply voltage	Verify load current	Detect leakage current	Detect electrical disturbances, Analyze power quality	Record and analyze electrical consumption	Test 5 kV insulation
							

p.36

p.22

p.28

p.12

p.12

p.44

p.46

p.22

4

5

UPS

Power Generators

Test battery resistance and voltage	Verify motor insulation	Test supply voltage	Test load current	Verify phase rotation
				

p.50

p.22

p.28

p.12

p.36

6

PV Systems

7

Earth, Ground

Test bypass diodes	Test PV insulation	Verify string voltage	Verify string voltage	Verify string current	Verify grounding
					

p.52

p.22

p.28

p.12

p.12

p.38

8 9

Air Conditioning, 5G Antennas

10

Servers

Check temperature and humidity	Check temperature	Test insulation	Test supply voltage	Test load current	Verify LAN wiring
					

p.54

p.58

p.22


p.28

p.12

p.57


Applications

Residences & Commercial Buildings

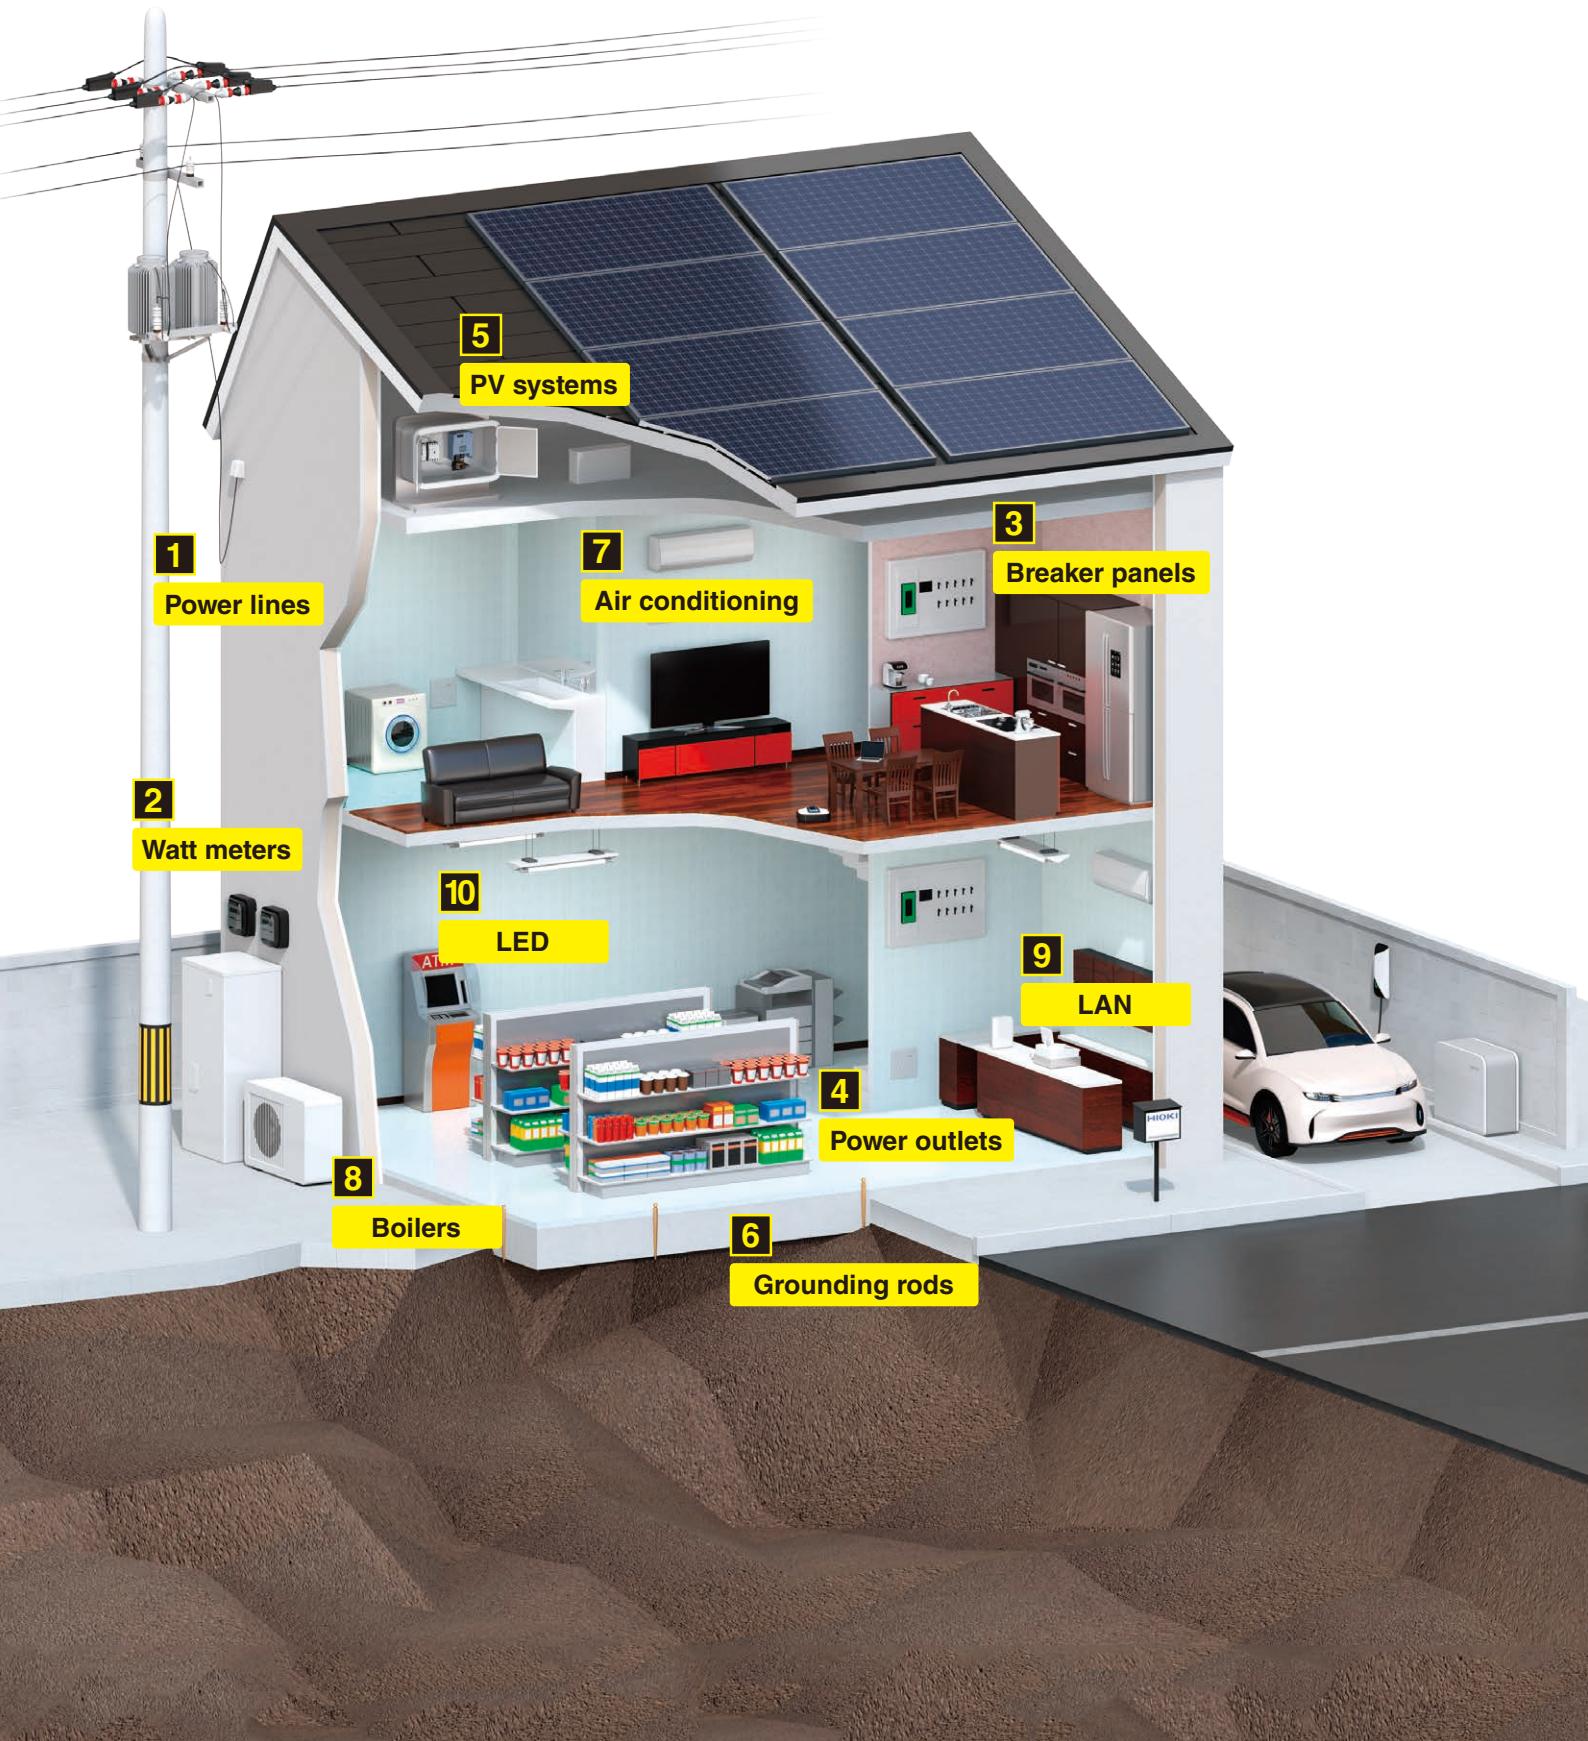

1 2 3**Power Lines, Watt Meters, Breaker Panels**

p.22




p.28




p.12




p.12



p.46

4**Power Outlets**


p.36



p.28



p.12

5**PV Systems**

p.52



p.22



p.28



p.12



p.12

6**Earth, Ground**

p.38

7**Air Conditioning**

p.54



p.58



p.22



p.28




p.12



p.12

8**Boilers**

p.22



p.28




p.12



p.12

9**LAN**

p.57

10**LED**

p.58

Manage Data on Mobile Devices and PC









for mobile devices Gennect Cross

Gennect Cloud expands your potential.



Gennect Cross
Dedicated website

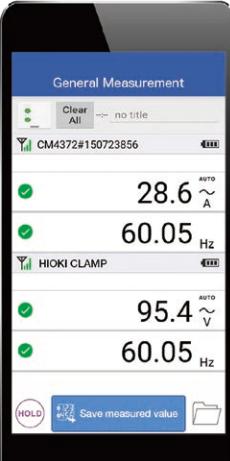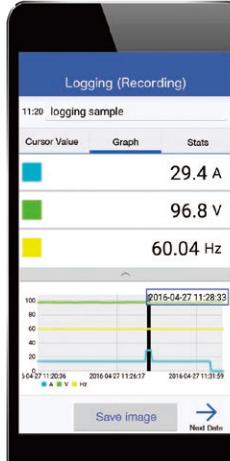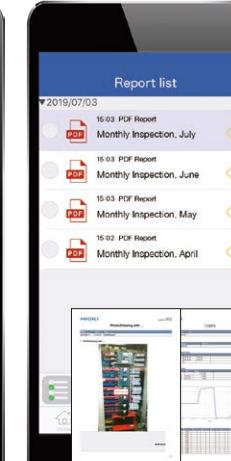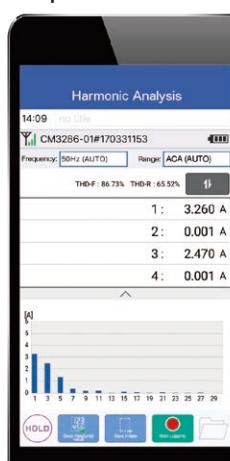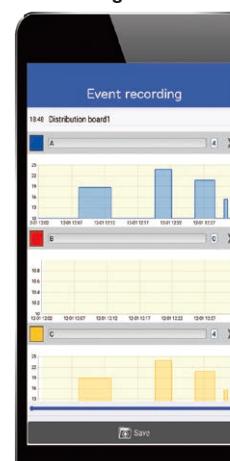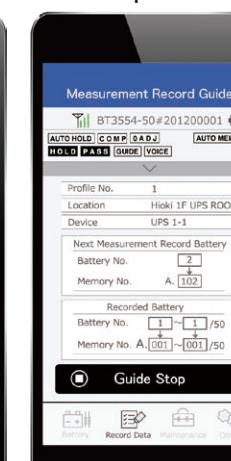

<p>Checking and saving measured values</p>  <p>The measurement values displayed on the instrument can be displayed and saved on the tablet in real time.</p>	<p>Record fluctuations in measured values</p>  <p>Measurement values can be saved at set recording intervals. You can also check the maximum, minimum, and average values.</p>	<p>Waveform observation, FFT analysis</p>  <p>Waveforms such as current and voltage, and FFT analysis waveforms can be displayed.</p>	<p>Record on photos and drawings</p>  <p>Measurements can be recorded on top of captured photos or imported drawing data.</p>	<p>Report writing</p>  <p>You can create reports from saved data, exporting them as PDF, JPG, or CSV.</p>
<p>Display judgment results in color and bar graph</p>  <p>The measured value is compared with the judgment value, and the result is displayed in PASS/WARNING/FAIL.</p>	<p>Check power quality by analyzing harmonics up to the 30th order</p>  <p>Calculate and display harmonic levels for individual orders, content percentages, and total harmonic distortion (THD-F and THDR).</p>	<p>Record the occurrence of intermittent leakage current</p>  <p>When a value greater than the threshold is measured, the time of occurrence, end time, and the maximum value for that period are recorded.</p>	<p>Display of disequilibrium rates and vector diagrams</p>  <p>Displays the disequilibrium rate and vector diagram.</p>	<p>Audio guidance about the battery measurement sequence</p>  <p>The app provides audio guidance about the battery measurement sequence. And, automatically saves the measurement results.</p>

Supported instruments (available functions vary depending on the measurement device. For details, please visit the Gennect Cross special website.)

Wireless adapter Z3210 (optional) must be attached to use Gennect Cross.											
WIRELESS ADAPTER Z3210	RM3548-50	IR4059	IR4057-50	IR5050, IR5051	DT4261	FT6041	FT6031-50	FT6380-50	PD3259-50	FT3425	FT4310
											
BT3554-50	CM4371-50	CM4373-50	CM4375-50	CM4141-50	CM3286-50	CM4001	CM4002	CM4003			
											

Downloading Gennect Cross

Data can be downloaded to tablets and smartphones using Hioki's dedicated apps available from the Google Play™ or App Store.

Search for "HIOKI" and download the "Gennect Cross" app.



for PCs Gennect One

Gennect Cloud expands your potential.



Gennect One
dedicated website




Connect To and Manage Instruments With a Computer

Collect and display measured values by instrument



Collect values in graphs and lists

Logging: When logging is started, measurement data is acquired at regular intervals from multiple measuring instruments. The acquired data is displayed and stored on the PC in real time.



Combine images and other elements

Dashboard: Create a dashboard by laying out measurements, background images, and other parts on the screen. You can display the measured values on the dashboard in real time.

Change instrument settings from your office



Change instrument settings from a computer

Remote control: Available to change the settings of the instrument and start and stop the measurement from the PC.

Instrument clock synchronization: The clock of the measuring instrument can be synchronized with the PC clock.



Collect and organize measurement files from scattered locations

Transfer measurement files to a computer

Automatic file transfer: Measurement data stored in the instrument can be automatically transferred to the PC.

Data import: The measurement data stored in the instrument can be transferred to the PC manually.

Review acquired files on a single time axis

Time-series viewer: After acquiring the measurement data stored in the main unit of the instrument, the data can be checked in a single time series.

Supported instruments (available functions vary depending on the measurement device. For details, please visit the Gennect One special website.)



Downloading Gennect One

Gennect One is a free PC application. Please download from the HIOKI website by going to the "Gennect One" landing page.



CLAMP METERS

Remarkable Ease of Use, New “Slim Jaw” Design

Traditional design



Slim jaw



Easily clamp within crowded cables with new slim jaw design

Innovative slim jaw resolves worksite issues such as crowded wiring to deliver safe, accurate and high-performance testing.



CM4375-50

CM4141-50

CM3289

CM3281

CM4001

Manage Measurement Data Using Z3210¹

Bluetooth®



WIRELESS ADAPTER
Z3210 (option)



Attach to enable
Bluetooth® wireless
technology



Transport to the Excel® file

Open an Excel® file and select a cell. The measured value being held on the instrument's display will be transferred to the computer and entered into the selected cell.



Learn more
Z3210



Transport to Gennect Cross

Gennect Cross, a free app designed specifically for use with Hioki measuring instruments, lets you check and manage measurement results and create reports. The software provides a range of functionality that helps manage data in the field, including photographing measurement sites, placing measurement results on photographs, and saving hand written memos.



Learn more
Gennect Cross



Verify current waveforms
on your mobile device

¹:1: Supported models: CM4371-50, CM4373-50, CM4375-50, CM4141-50, CM4001, CM4002, CM4003, CM3286-50 (requires attaching WIRELESS ADAPTER Z3210)

Safe PV Measurement Using P2010²

Available to measure 2000 V DC DC HIGH VOLTAGE PROBE P2010 (option)



CAT IV 1000 V
CAT III 2000 V



CM4371-50

CM4373-50

CM4375-50

CM4141-50


²:2: Supported models: CM4371-50, CM4373-50, CM4375-50, CM4141-50 (requires using DC HIGH VOLTAGE PROBE P2010)

Lineup

Clamp	
Insulation	
DMMS	
Detectors	
Earth	
Power quality	
Power loggers	
Battery	
PV	
Logger	
LAN	
Lux	
Temperature	
Resistance	


Measurement type	AC/DC current				
Model	CM4371-50	CM4373-50	CM4375-50	3287	3288 3288-20
Appearance					
Core jaw diameter	Φ33 mm (1.30 in.)	Φ55 mm (2.17 in.)	Φ34 mm (1.34 in.)	Φ35 mm (1.38 in.)	Φ35 mm (1.38 in.)
AC measurement system	True RMS	True RMS	True RMS	True RMS	Mean value (3288) True RMS (3288-20)
Frequency characteristics	10 Hz to 1 kHz	10 Hz to 500 Hz			
Measurement parameters	AC current (resolution) Guaranteed accuracy range	600 A (0.01) 1 A to 600 A	2000 A (0.1) 1 A to 2000 A	1000 A (0.1) 1 A to 999.9 A	100 A (0.01) Full display range ⁵
	DC current (resolution)	600 A (0.01)	2000 A (0.1)	999.9 A (0.1)	100 A (0.01)
	AC Voltage	1000 V	1000 V	1000 V	600 V
	DC Voltage	1000 V, 2000 V ¹	1000 V, 2000 V ¹	1000 V, 2000 V ¹	600 V
	Power	1200 kVA (DC) ¹	4000 kVA (DC) ¹	2000 kVA (DC) ¹	N/A
	Resistance	6 MΩ	6 MΩ	6 MΩ	42 MΩ
	Temperature	-40°C to 400°C	-40°C to 400°C	-40°C to 400°C	N/A
	Electrostatic capacity	✓	✓	✓	N/A
	Frequency	999.9 Hz	999.9 Hz	999.9 Hz	N/A
	Rush current	✓	✓	✓	N/A
Continuity check	✓	✓	✓	✓	✓
Diode check	✓	✓	✓	N/A	N/A
Non-Contact Voltage	✓	✓	N/A	N/A	N/A
Low-pass filter	✓	✓	✓	N/A	N/A
Auto power off	✓	✓	✓	✓	✓
Auto range	✓	✓	✓	✓	✓
Data hold	AUTO/MANUAL	AUTO/MANUAL	AUTO/MANUAL	MANUAL	MANUAL
Automatic AC/DC detection	✓	✓	✓	N/A	N/A
MAX/MIN/AVG	✓	✓	✓	N/A	N/A
Output	N/A	N/A	N/A	N/A	N/A
Bluetooth® communication	✓ (with Z3210)	✓ (with Z3210)	✓ (with Z3210)	N/A	N/A
Backlight	✓	✓	✓	N/A	N/A
Display refresh rate	5 times/s	5 times/s	5 times/s	2.5 times/s	2.5 times/s
Safety standard category	CAT IV 600 V CAT III 1000 V	CAT IV 600 V CAT III 1000 V	CAT IV 600 V CAT III 1000 V	V: CAT III 300 V A: CAT III 600 V	V: CAT III 300 V A: CAT III 600 V
Safety standard category (with P2010)	CAT IV 1000 V CAT III 2000 V	CAT IV 1000 V CAT III 2000 V	CAT IV 1000 V CAT III 2000 V	N/A	N/A
CE	✓	✓	✓	✓	✓
Dustproof and waterproof	IP20 ² /IP54 ³	IP20 ² /IP54 ³	IP20 ² /IP54 ³	N/A	N/A
Drop proof	N/A	N/A	N/A	N/A	N/A
Power supply	LR03 x 2 Alkaline	LR03 x 2 Alkaline	LR03 x 2 Alkaline	CR2032 x 1 Coin type	CR2032 x 1 Coin type
Dimensions (W × H × D)	65 × 215 × 35 mm 2.56 × 8.46 × 1.38 in.	65 × 250 × 35 mm 2.56 × 9.84 × 1.38 in.	65 × 242 × 35 mm 2.56 × 9.53 × 1.38 in.	57 × 180 × 16 mm 2.24 × 7.09 × 0.63 in.	57 × 180 × 16 mm 2.24 × 7.09 × 0.63 in.
Weight	340 g, 12.0 oz.	530 g, 18.7 oz.	350 g, 12.3 oz.	170 g, 6.0 oz.	150 g, 5.3 oz.

Size comparison

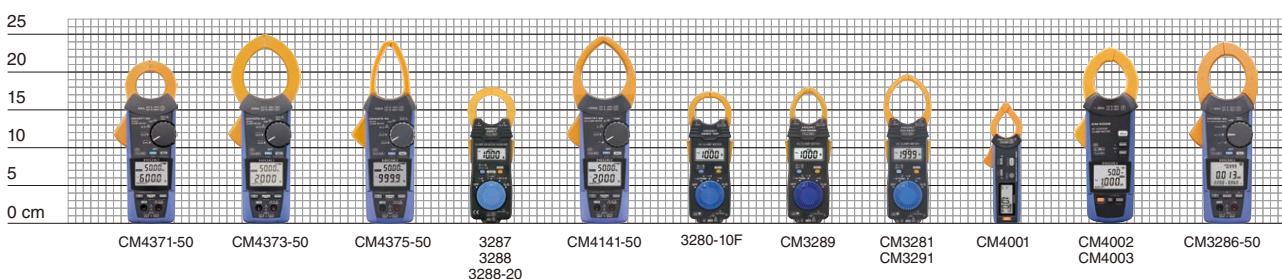

*1: Only when DC HIGH VOLTAGE PROBE P2010 is used *2: Voltage measurement in a completely dry condition. When jaw closes. *3: While in storage

*4: When measuring the current in an insulated conductor. Do not use it when wet. *5: Displayed 0 with below 0.06

Measurement type	AC current					Leakage current		AC power
Model	CM4141-50	3280-10F	CM3289	CM3281	CM3291	CM4001	CM4002 CM4003	CM3286-50
Appearance								
Core jaw diameter	Φ55 mm (2.17 in.)	Φ33 mm (1.30 in.)	Φ33 mm (1.30 in.)	Φ46 mm (1.81 in.)	Φ46 mm (1.81 in.)	Φ24 mm (0.94 in.)	Φ40 mm (1.57 in.)	Φ46 mm (1.81 in.)
AC measurement system	True RMS	Mean value	True RMS	Mean value	True RMS	True RMS	True RMS	True RMS
Frequency characteristics	45 Hz to 1 kHz	50/60 Hz	40 Hz to 1 kHz	50/60 Hz	40 Hz to 1 kHz	40 Hz to 1 kHz	15 Hz to 2 kHz	45 Hz to 1 kHz
Measurement parameters	AC current (resolution) Guaranteed accuracy range	2000 A (0.01) 1 A to 2000 A	1000 A (0.01) 4 A to 1000 A	1000 A (0.01) 4 A to 1000 A	2000 A (0.01) 4 A to 1999 A	2000 A (0.01) 4 A to 1999 A	600 A (0.01mA) 0.6 mA to 600 A	200 A (0.001mA) 0.06 mA to 200 A
	DC current (resolution)	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	AC Voltage	1000 V	600 V	600 V	600 V	600 V	N/A	600 V
	DC Voltage	1000 V, 2000 V ¹	600 V	600 V	600 V	600 V	N/A	N/A
	Power	N/A	N/A	N/A	N/A	N/A	N/A	360 kW (AC)
	Resistance	6 MΩ	42 MΩ	42 MΩ	42 MΩ	42 MΩ	N/A	N/A
	Temperature	-40°C to 400°C	N/A	N/A	N/A	N/A	N/A	N/A
	Electrostatic capacity	✓	N/A	N/A	N/A	N/A	N/A	N/A
	Frequency	999.9 Hz	N/A	N/A	N/A	N/A	999.9 Hz	2000 Hz
	Rush current	✓	N/A	N/A	N/A	N/A	✓	✓
	Continuity check	✓	✓	✓	✓	✓	N/A	N/A
	Diode check	✓	N/A	N/A	N/A	N/A	N/A	N/A
	Non-Contact Voltage	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	Low-pass filter	✓	N/A	N/A	N/A	N/A	✓	✓
	Auto power off	✓	✓	✓	✓	✓	✓	✓
	Auto range	✓	✓	✓	✓	✓	✓	✓
	Data hold	AUTO/MANUAL	MANUAL	MANUAL	MANUAL	MANUAL	AUTO/MANUAL	AUTO/MANUAL
Safety and environmental	Automatic AC/DC detection	✓ (voltage only)	N/A	N/A	N/A	N/A	N/A	N/A
	MAX/MIN/AVG	✓	N/A	N/A	N/A	N/A	✓	✓
	Output	N/A	N/A	N/A	N/A	N/A	✓ (CM4003 only)	N/A
	Bluetooth® communication	✓ (with Z3210)	N/A	N/A	N/A	✓ (with Z3210)	✓ (with Z3210)	✓ (with Z3210)
	Backlight	✓	N/A	N/A	N/A	✓	✓	✓
	Display refresh rate	5 times/s	2.5 times/s	2.5 times/s	2.5 times/s	2.5 times/s	5 times/s	5 times/s
	Safety standard category	CAT IV 600 V CAT III 1000 V	V: CAT III 300 V A: CAT IV 300 V	V: CAT III 300 V A: CAT IV 300 V	V: CAT III 300 V A: CAT IV 300 V	CAT III 300 V	CAT IV 300 V (CM4002) CAT III 600 V (CM4002) CAT III 300 V (CM4003)	CAT IV 600 V CAT III 1000 V
	Safety standard category (with P2010)	CAT IV 1000 V CAT III 2000 V	N/A	N/A	N/A	N/A	N/A	N/A
	CE	✓	✓	✓	✓	✓	✓	✓
	Dustproof and waterproof	IP50 ^{2,4}	IP40 ³	N/A	N/A	N/A	IP40	IP20 ² /IP50 ³
Dimensions and weight	Drop proof	N/A	✓	✓	✓	N/A	N/A	N/A
	Power supply	LR03 x 2 Alkaline	CR2032 x 1 Coin type	LR03 x 1 Alkaline	LR6 x 2 Alkaline			
	Dimensions (W × H × D)	65 × 247 × 35 mm 2.56 × 9.72 × 1.38 in.	57 × 175 × 16 mm 2.24 × 6.89 × 0.63 in.	57 × 181 × 16 mm 2.24 × 7.13 × 0.63 in.	57 × 198 × 16 mm 2.24 × 7.80 × 0.63 in.	57 × 198 × 16 mm 2.24 × 7.80 × 0.63 in.	37 × 160 × 27 mm 1.46 × 6.30 × 1.06 in.	64 × 233 × 36 mm 2.52 × 9.17 × 1.41 in.
	Weight	300 g, 10.6 oz.	100 g, 3.5 oz.	100 g, 3.5 oz.	103 g, 3.6 oz.	103 g, 3.6 oz.	115 g, 4.1 oz.	400 g, 14.1 oz.
								450 g, 15.9 oz.

Test leads with an integrated cap for greater convenience and safety



CAT IV 600V, CAT III 1000V



The L9300 test lead with an integrated cap is included as a standard. The finger guard can be easily slid to switch between measurement categories without worrying about losing the cap.


Clamp
Insulation
DMMS
Detectors
Earth
Power quality
Power loggers
Battery
PV
Logger
LAN
Lux
Temperature
Resistance

AC/DC Current



AC/DC CLAMP METER CM4371-50, CM4373-50, CM4375-50

Product warranty for 3 years
Accuracy guaranteed for 1 year



$\Phi 35$ mm = 1.30 in.



CM4371-50

600 A AC/DC

True RMS

CAT IV 600 V

CAT III 1000 V

With P2010

CAT IV 1000 V DC

CAT III 2000 V DC

With Z3210

Bluetooth®

Please see www.hioki.com for list of supported regions.



$\Phi 55$ mm = 2.17 in.



CM4373-50

2000 A AC/DC

True RMS

CAT IV 600 V

CAT III 1000 V

With P2010

CAT IV 1000 V DC

CAT III 2000 V DC

With Z3210

Bluetooth®

Please see www.hioki.com for list of supported regions.



$\Phi 34$ mm = 1.34 in.



CM4375-50

1000 A AC/DC

True RMS

CAT IV 600 V

CAT III 1000 V

With P2010

CAT IV 1000 V DC

CAT III 2000 V DC

With Z3210

Bluetooth®

Please see www.hioki.com for list of supported regions.



Included accessories



L9300



C0203

- LR03 Alkaline battery x 2
- Instruction manual



WIRELESS ADAPTER

Z3210 (option)

[Attach to enable Bluetooth® wireless technology](#)



DC HIGH VOLTAGE PROBE


P2010 (option)

[Available to measure 2000 V DC](#)



CLAMP ON AC/DC HiTESTER 3287, 3288, 3288-20

Product warranty for 3 years
Accuracy guaranteed for 1 year



$\Phi 35$ mm = 1.38 in.



3287

100 A AC/DC

True RMS

V: CAT III 300 V

A: CAT III 600 V

$\Phi 35$ mm = 1.38 in.



3288

1000 A AC/DC

Mean value

V: CAT III 300 V

A: CAT III 600 V

$\Phi 35$ mm = 1.38 in.



3288-20

1000 A AC/DC

True RMS

V: CAT III 300 V

A: CAT III 600 V

Included accessories



L9208




9398

- Coin type lithium battery CR2032 x 1
- Instruction manual



For more details



Model	CM4371-50	CM4373-50	CM4375-50	Basic accuracy	
AC Current	✓	N/A	N/A	20.00 A, 600.0 A (guaranteed accuracy range: 1.00 A to 600.0 A)	±1.3% rdg. ±0.08 A
	N/A	✓	N/A	600.0 A, 2000 A (guaranteed accuracy range: 1.0 A to 2000 A)	±1.3% rdg. ±0.3 A
	N/A	N/A	✓	1000 A (guaranteed accuracy range: 1.0 A to 999.9 A)	±1.3% rdg. ±0.3 A
DC Current	✓	N/A	N/A	20.00 A, 600.0 A (guaranteed accuracy range: ±1.00 A to ±600.0 A)	±1.3% rdg. ±0.08 A
	N/A	✓	N/A	600.0 A, 2000 A (guaranteed accuracy range: ±1.0 A to ±2000 A)	±1.3% rdg. ±0.3 A
	N/A	N/A	✓	1000 A (guaranteed accuracy range: ±1.0 A to ±999.9 A)	±1.3% rdg. ±0.3 A
AC + DC Current	✓	N/A	N/A	20.00 A, 600.0 A (guaranteed accuracy range: 1.00 A to 600.0 A)	±1.3% rdg. ±0.13 A
	N/A	✓	N/A	600.0 A, 2000 A (guaranteed accuracy range: 1.0 A to 2000 A)	±1.3% rdg. ±1.3 A
	N/A	N/A	✓	1000 A (guaranteed accuracy range: 1.0 A to 999.9 A)	±1.3% rdg. ±1.3 A
AC Voltage	✓	✓	✓	6.000 V, 60.00 V, 600.0 V, 1000 V	±0.9% rdg. ±0.003 V
DC Voltage	✓	✓	✓	600.0 mV, 6.000 V, 60.00 V, 600.0 V, 1000 V, 2000 V ²	±0.5% rdg. ±0.5 mV
AC + DC Voltage	✓	✓	✓	6.000 V, 60.00 V, 600.0 V, 1000 V	±1.0% rdg. ±0.013 V
DC Power	✓	N/A	N/A	0.00 VA to ±1200 kVA ²	±2.0% rdg. ±20 dgt.
	N/A	✓	N/A	0.000 kVA to ±4000 kVA ²	±2.0% rdg. ±20 dgt.
	N/A	N/A	✓	0.000 kVA to ±2000 kVA ²	±2.0% rdg. ±0.020 kVA
Resistance	✓	✓	✓	600.0 Ω, 6.000 kΩ, 60.00 kΩ, 600.0 kΩ, 6.000 MΩ	±0.7% rdg. ±0.5 Ω
Temperature	✓	✓	✓	-40.0°C to 400.0°C	±0.5% rdg. ±3.0°C
Electrostatic capacity	✓	✓	✓	1.000 μF, 10.00 μF, 100.0 μF, 1000 μF	±1.9% rdg. ±0.005 μF
Frequency	✓	✓	✓	9.999 Hz, 99.99 Hz, 999.9 Hz	±0.1% rdg. ±0.003 Hz

Display refresh rate	5 times/s ³
Operating temperature	-25°C to 65°C, 90% RH or less (non-condensating)
Storage temperature	-30°C to 70°C, 90% RH or less (non-condensating)
Dustproof and waterproof	IP20 ⁴ /IP54 ⁵
Power supply	Alkaline battery LR03 x 2
Continuous operating time	40 hours ⁶
Dimensions (W x H x D)	CM4371-50: 65 x 215 x 35 mm (2.56 x 8.46 x 1.38 in.) CM4373-50: 65 x 250 x 35 mm (2.56 x 9.84 x 1.38 in.) CM4375-50: 65 x 242 x 35 mm (2.56 x 9.53 x 1.38 in.)
Weight	CM4371-50: 340 g (12 oz.) CM4373-50: 530 g (18.7 oz.) CM4375-50: 350 g (12.3 oz.)

Order code **CM4371-50**

Includes Z3210

Order code **CM4373-50**Order code **CM4371-90**Order code **CM4375-50**Order code **CM4373-90**Order code **Z3210**Order code **CM4375-90**Order code **P2010**

Includes Z3210 and P2010

Order code **CM4373-93**Order code **CM4375-93**¹: Excludes CM4375-50²: Only when DC HIGH VOLTAGE PROBE P2010 is used³: Excludes electrostatic capacity, frequency, and temperature⁴: Voltage measurement in a completely dry condition. When jaw closes.⁵: While in storage⁶: With backlight and Bluetooth® communications turned off

Model	3287	3288	3288-20	Basic accuracy	
AC Current	✓	N/A	N/A	10.00 A, 100.0 A (display range: 0A to 10.00/100.0 A)	±1.5% rdg. ±5 dgt.
	N/A	✓	✓	100.0 A, 1000 A (display range: 0A to 100.0/1000 A)	±1.5% rdg. ±5 dgt.
DC Current	✓	N/A	N/A	10.00 A, 100.0 A	±1.5% rdg. ±5 dgt.
	N/A	✓	✓	100.0 A, 1000 A	±1.5% rdg. ±5 dgt.
AC Voltage	✓	✓	✓	4.200 V, 42.00 V, 420.0 V, 600 V	±2.3% rdg. ±8 dgt.
DC Voltage	✓	✓	✓	420.0 mV, 4.200 V, 42.00 V, 420.0 V, 600 V	±1.3% rdg. ±4 dgt.
Resistance	✓	✓	✓	420.0 Ω, 4.200 kΩ, 42.00 kΩ, 420.0 MΩ, 42.00 MΩ	±2.0% rdg. ±4 dgt.
Display refresh rate	2.5 times/s				
Operating temperature	0°C to 40°C, 80% RH or less (non-condensating)				
Storage temperature	-10°C to 50°C, 80% RH or less (non-condensating)				
Dustproof and waterproof	N/A				
Power supply	Coin type lithium battery CR2032 x 1				Order code 3287
Continuous operating time	25 hours				Order code 3288
Dimensions (W x H x D)	57 x 180 x 16 mm (2.24 x 7.09 x 0.63 in.)				Order code 3288-20
Weight	3287: 170 g (6.0 oz.), 3288, 3288-20: 150 g (5.3 oz.)				


¹: Without 3288Clamp
Insulation
DMMs
Detectors
Earth
Power quality
Power loggers
BatteryPV
Logger
LAN
Lux
Temperature
Resistance

AC Current

AC CLAMP METER CM4141-50



Product warranty for 3 years
Accuracy guaranteed for 1 year



WIRELESS ADAPTER
Z3210 (option)
Attach to enable Bluetooth® wireless technology

Included accessories



- LR03 Alkaline battery × 2
- Instruction manual

Φ55 mm = 2.17 in.

CM4141-50

2000 A AC

True RMS

CAT IV 600 V
CAT III 1000 V



With P2010

CAT IV 1000 V DC
CAT III 2000 V DC

With Z3210




Please see www.hioki.com for list of supported regions.



AC CLAMP METER 3280-10F, CM3289, CM3281, CM3291



Product warranty for 3 years
Accuracy guaranteed for 1 year



Included accessories



- CARRYING CASE (models vary as shown on right)
- Coin type lithium battery CR2032 × 1
- Instruction manual



Φ33 mm = 1.30 in.

**3280-10F
3280-70F**

1000 A AC

Mean value

V: CAT III 300 V
A: CAT IV 300 V

9398
(3280-10F)

C0205
(3280-70F)



Φ33 mm = 1.30 in.

CM3289

1000 A AC

True RMS

V: CAT III 300 V
A: CAT IV 300 V

9398



Φ46 mm = 1.81 in.

**CM3281
CM3291**

2000 A AC

CM3281: Mean value
CM3291: True RMS

V: CAT III 300 V
A: CAT IV 300 V



CARRYING CASE

Leakage Current



Product warranty for 3 years
Accuracy guaranteed for 1 year

AC LEAKAGE CLAMP METER CM4001, CM4002, CM4003



WIRELESS ADAPTER
Z3210 (option)
Attach to enable Bluetooth® wireless technology



Φ24 mm = 0.94 in.

CM4001

0.6 mA to 600 A AC

True RMS


CAT III 300 V

Included accessories



CARRYING CASE

- Strap
- LR03 Alkaline battery × 1
- Instruction manual

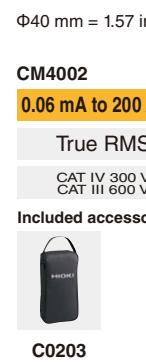

Φ40 mm = 1.57 in.

CM4002

0.06 mA to 200 A AC

True RMS


CAT IV 300 V
CAT III 600 V

Included accessories



CARRYING CASE

- LR6 Alkaline battery × 2
- Instruction manual

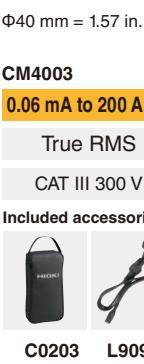

Φ40 mm = 1.57 in.

CM4003

0.06 mA to 200 A AC

True RMS

CAT III 300 V

Included accessories



CARRYING CASE

- LR6 Alkaline battery × 2
- Instruction manual
- USB cable

With Z3210



Please see www.hioki.com for list of supported regions.



With Z3210




Please see www.hioki.com for list of supported regions.



With Z3210




Please see www.hioki.com for list of supported regions.



With Z3210




Please see www.hioki.com for list of supported regions.



With Z3210




Please see www.hioki.com for list of supported regions.



With Z3210




Please see www.hioki.com for list of supported regions.



With Z3210




Please see www.hioki.com for list of supported regions.



With Z3210




Please see www.hioki.com for list of supported regions.



With Z3210




Please see www.hioki.com for list of supported regions.



With Z3210




Please see www.hioki.com for list of supported regions.



With Z3210




Please see www.hioki.com for list of supported regions.



With Z3210




Please see www.hioki.com for list of supported regions.



With Z3210




Please see www.hioki.com for list of supported regions.



With Z3210




Please see www.hioki.com for list of supported regions.



With Z3210




Please see www.hioki.com for list of supported regions.



With Z3210




Please see www.hioki.com for list of supported regions.



With Z3210




Please see www.hioki.com for list of supported regions.



With Z3210




Please see www.hioki.com for list of supported regions.



With Z3210




Please see www.hioki.com for list of supported regions.



With Z3210




Please see www.hioki.com for list of supported regions.



With Z3210




Please see www.hioki.com for list of supported regions.



With Z3210




Please see www.hioki.com for list of supported regions.



With Z3210




Please see www.hioki.com for list of supported regions.



With Z3210




Please see www.hioki.com for list of supported regions.



With Z3210




Please see www.hioki.com for list of supported regions.



With Z3210




Please see www.hioki.com for list of supported regions.



With Z3210




Please see www.hioki.com for list of supported regions.



With Z3210




Please see www.hioki.com for list of supported regions.



With Z3210




Please see www.hioki.com for list of supported regions.



With Z3210




Please see www.hioki.com for list of supported regions.



With Z3210




Please see www.hioki.com for list of supported regions.



With Z3210




Please see www.hioki.com for list of supported regions.



With Z3210




Please see www.hioki.com for list of supported regions.



With Z3210




Please see www.hioki.com for list of supported regions.



With Z3210




Please see www.hioki.com for list of supported regions.



With Z3210



Please see www.hioki.com for list of supported regions.





For more details



Model	CM4141-50	Basic accuracy
AC Current	✓	60.00A, 600.0 A, 2000 A (guaranteed accuracy range: 1.00A to 2000 A)
AC Voltage	✓	6.000 V, 60.00 V, 600.0 V, 1000 V
DC Voltage	✓	600.0 mV, 6.000 V, 60.00 V, 600.0 V, 1000 V, 2000 V ¹
AC + DC Voltage	✓	6.000 V, 60.00 V, 600.0 V, 1000 V
Resistance	✓	600.0 Ω, 6.000 kΩ, 60.00 kΩ, 600.0 kΩ, 6.000 MΩ
Temperature	✓	-40.0°C to 400.0°C
Electrostatic capacity	✓	1.000 μF, 10.00 μF, 100.0 μF, 1000 μF
Frequency	✓	9.999 Hz, 99.99 Hz, 999.9 Hz

Display refresh rate	5 times/s ²
Operating temperature	-25°C to 65°C, 90% RH or less (non-condensating)
Storage temperature	-30°C to 70°C, 90% RH or less (non-condensating)
Dustproof and waterproof	IP50 ^{3,4}
Power supply	Alkaline battery LR03 x 2
Continuous operating time	48 hours ⁵
Dimensions (W x H x D)	65 x 247 x 35 mm (2.56 x 9.72 x 1.38 in.)
Weight	300 g (10.6 oz.)

Order code CM4141-50

Order code CM4141-90

Order code Z3210

Model CM4141-90 includes Z3210 as a set

¹: Only when DC HIGH VOLTAGE PROBE P2010 is used *²: Excludes electrostatic capacity, frequency, and temperature³: Voltage measurement in a completely dry condition. When jaw closes. *⁴: While in storage. *⁵: With backlight and Bluetooth® communications turned off

Model	3280-10F	CM3289	CM3281, CM3291	Basic accuracy
AC Current	✓	✓	N/A	42.00 A, 420.0 A, 1000 A (guaranteed accuracy range: 4.00A to 1000 A)
	N/A	N/A	✓	42.00 A, 420.0 A, 2000 A (guaranteed accuracy range: 4.00A to 1999 A)
AC Voltage	✓	✓	✓	42.00 V, 420.0 V, 420.0 V, 600 V
DC Voltage	✓	✓	✓	420.0 mV, 4.200 V, 42.00 V, 420.0 V, 600 V
Resistance	✓	✓	✓	420.0 Ω, 4.200 kΩ, 42.00 kΩ, 420.0 MΩ, 42.00 MΩ

Display refresh rate	2.5 times/s
Operating temperature	-25°C to 65°C, 80% RH or less (non-condensating)
Storage temperature	-25°C to 65°C, 80% RH or less (non-condensating)
Dustproof and waterproof	IP40 (EN60529) ^{2,3}
Power supply	Coin type lithium battery CR2032 x 1
Continuous operating time	3280-10F, CM3281: 120 hours CM3289: 70 hours CM3291: 70 hours
Dimensions (W x H x D)	3280-10F: 57 x 175 x 16 mm (2.24 x 6.89 x 0.63 in.) CM3289: 57 x 181 x 16mm (2.24 x 7.13 x 0.63 in.) CM3281, CM3291: 57 x 198 x 16 mm (2.24 x 7.80 x 0.63 in.)
Weight	3280-10F: 100 g (3.5 oz.) CM3289: 100 g (3.5 oz.) CM3281, CM3291: 103 g (3.6 oz.)



3280F, CM3289, CM3291 are compatible with the CT6280 AC Flexible Current Sensor

Φ130mm (5.1 in.), 4200 A AC

Order code 3280-10F

Order code 3280-70F

Order code CM3289

Order code CM3291

Order code CM3281

Model 3280-70F includes 3280-10F AC Clamp Meter and CT6280 AC Flexible Sensor as a set

¹: Excludes 3280-10F, 3280-70F²: Excludes CM3289, CM3281, CM3291³: While in storage

Model	CM4001	CM4002	CM4003	Basic accuracy
AC Current	✓	N/A	N/A	60.00 mA, 600.0 mA, 6.000A, 60.00A, 600.0A (guaranteed accuracy range: 0.60 mA to 600.0A)
	N/A	✓	✓	6.000 mA, 60.00 mA, 600.0 mA, 6.000A, 60.00A, 200.0A (guaranteed accuracy range: 0.060 mA to 200.0A)
Frequency	✓	N/A	N/A	999.9 Hz
	N/A	✓	✓	999.9 Hz, 2000 Hz

Display refresh rate	5 times/s
Operating temperature	-10°C to 65°C (non-condensating)
Storage temperature	CM4001: -10°C to 65°C (non-condensating) CM4002, CM4003: -30°C to 70°C (non-condensating)
Dustproof and waterproof	CM4002, CM4003: IP40 (EN60529)
Power supply	CM4001: LR03 Alkaline battery x 1, 32 hours CM4002, CM4003: LR6 Alkaline battery x 2, 48 hours (LR6, without Z3210) CM4003: AC ADAPTER Z1013 (option)
Continuous operating time	CM4001: 37 x 160 x 27 mm (1.46 x 6.30 x 1.06 in.) CM4002, CM4003: 64 x 233 x 36 mm (2.52 x 9.17 x 1.41 in.)
Dimensions (W x H x D)	CM4001: 115 g (4.1 oz.) CM4002, CM4003: 400 g (14.1 oz.)
Weight	CM4001: 115 g (4.1 oz.) CM4002, CM4003: 400 g (14.1 oz.)

Includes external output function (CM4003 Only)

Pair with a recorder to capture instantaneous or current waveforms



*Using CONNECTION CABLE L9097 (included accessories)

RMS value output (RMS mode)

DC 600 mV/f.s.

Waveform output (WAVE mode)

AC 600 mV/f.s.

Order code CM4001

Order code CM4001-90

Order code CM4002

Order code CM4002-90

Order code CM4003

Order code CM4003-90

Order code Z3210

Model CM4001-90, CM4002-90, CM4003-90 includes Z3210 as a set



Clamp

Insulation

DMMs

Detectors

Power quality

Power loggers

Battery

PV

Logger

LAN

Lux

Temperature

Resistance



For more details


 Product warranty for 3 years
 Accuracy guaranteed for 1 year

Clamp

Insulation

DMMS

Detectors

Earth

Power quality

Power loggers

Battery

PV

Logger

LAN

Lux

Temperature

Resistance

AC Power

AC CLAMP POWER METER CM3286-50

Φ46 mm = 1.81 in.



CM3286-50

AC 600 A

True RMS

CAT IV 600 V
CAT III 1000 V

With Z3210

Bluetooth®

Please see www.hioki.com for list of supported regions.Gennect
Cross

WIRELESS ADAPTER

Z3210 (option)

Attach to enable Bluetooth® wireless technology

Order code CM3286-50

Order code CM3286-90

Order code Z3210

Model CM3286-90 includes Z3210 as a set

Included accessories



L9257



C0203

- LR03 Alkaline battery x 2
- Instruction manual


*1: Harmonics can be displayed using dedicated application software (Gennect Cross)

*2: Voltage measurement in a completely dry condition. When jaw closes.

*3: While in storage.

Measurement parameters	Power (Active/reactive/apparent)	Single phase	3.600 kW, 36.00 kW, 360.0 kW Guaranteed accuracy range: 0.005 kW to 360.0 kW Basic accuracy: ±2.0% rdg. ±7 dgt.	
		Balanced three-phase 3-wire	7.200 kW, 72.00 kW, 720.0 kW guaranteed accuracy range: 0.020 kW to 623.5 kW Basic accuracy: ±3.0% rdg. ±10 dgt.	
AC Current	Balanced three-phase 4-wire	10.80 kW, 108.0 kW, 1080 kW guaranteed accuracy range: 0.040 kW to 1080 kW Basic accuracy: ±2.0% rdg. ±3 dgt.	6.000 A, 60.0 A, 600.0 A Basic accuracy: ±1.0% rdg. ±3 dgt.	
AC Voltage	AC Current	600.0 V Basic accuracy: ±0.7% rdg. ±3 dgt.	600.0 V Basic accuracy: ±0.7% rdg. ±3 dgt.	
Power factor	AC Voltage	Single-phase, Balanced three-phase 4-wire: [Regeneration] -1.000 to -0.001, [Consumption] 0.000 to 1.000 Balanced three-phase 3-wire: [Regeneration] -0.001, [Consumption] 0.000 to 1.000	Phase angle	Single-phase, Balanced three-phase 4-wire: [lead] -180.0° to -0.1°, [lag] 0.0° to 179.9° Balanced three-phase 3-wire: [lead] -90.0° to -0.1°, [lag] 0.0° to 90.0°
Frequency	Power factor	45.0 Hz to 999.9 Hz	Frequency	45.0 Hz to 999.9 Hz
Simple Active Energy Consumption (single-phase)	Phase angle	99.99 Wh, 999.9 Wh, 9.999 kWh, 99.99 kWh, 999.9 kWh, 9999 kWh	Simple Active Energy Consumption (single-phase)	99.99 Wh, 999.9 Wh, 9.999 kWh, 99.99 kWh, 999.9 kWh, 9999 kWh
Harmonic ¹ (with Z3210)	Frequency	Voltage or current harmonic levels up to 30th order, content factor, total harmonic distortion ratio	Harmonic ¹ (with Z3210)	Voltage or current harmonic levels up to 30th order, content factor, total harmonic distortion ratio
Display refresh rate	Harmonic ¹ (with Z3210)	2 times/s	Display refresh rate	2 times/s
Operating temperature	Display refresh rate	-25°C to 65°C, 80% RH or less (non-condensating)	Operating temperature	-25°C to 65°C, 80% RH or less (non-condensating)
Storage temperature	Operating temperature	-25°C to 65°C, 80% RH or less (non-condensating)	Storage temperature	-25°C to 65°C, 80% RH or less (non-condensating)
Dustproof and waterproof	Storage temperature	IP20 ² /IP50 ³	Dustproof and waterproof	IP20 ² /IP50 ³
Power supply	Dustproof and waterproof	LR03 Alkaline battery x 2	Power supply	LR03 Alkaline battery x 2
Continuous operating time	Power supply	25 hours	Continuous operating time	25 hours
Dimensions (W x H x D)	Continuous operating time	65 x 241 x 35 mm (2.56 x 9.49 x 1.38 inch)	Dimensions (W x H x D)	65 x 241 x 35 mm (2.56 x 9.49 x 1.38 inch)
Weight	Dimensions (W x H x D)	450 g (15.9 oz.)	Weight	450 g (15.9 oz.)

Options

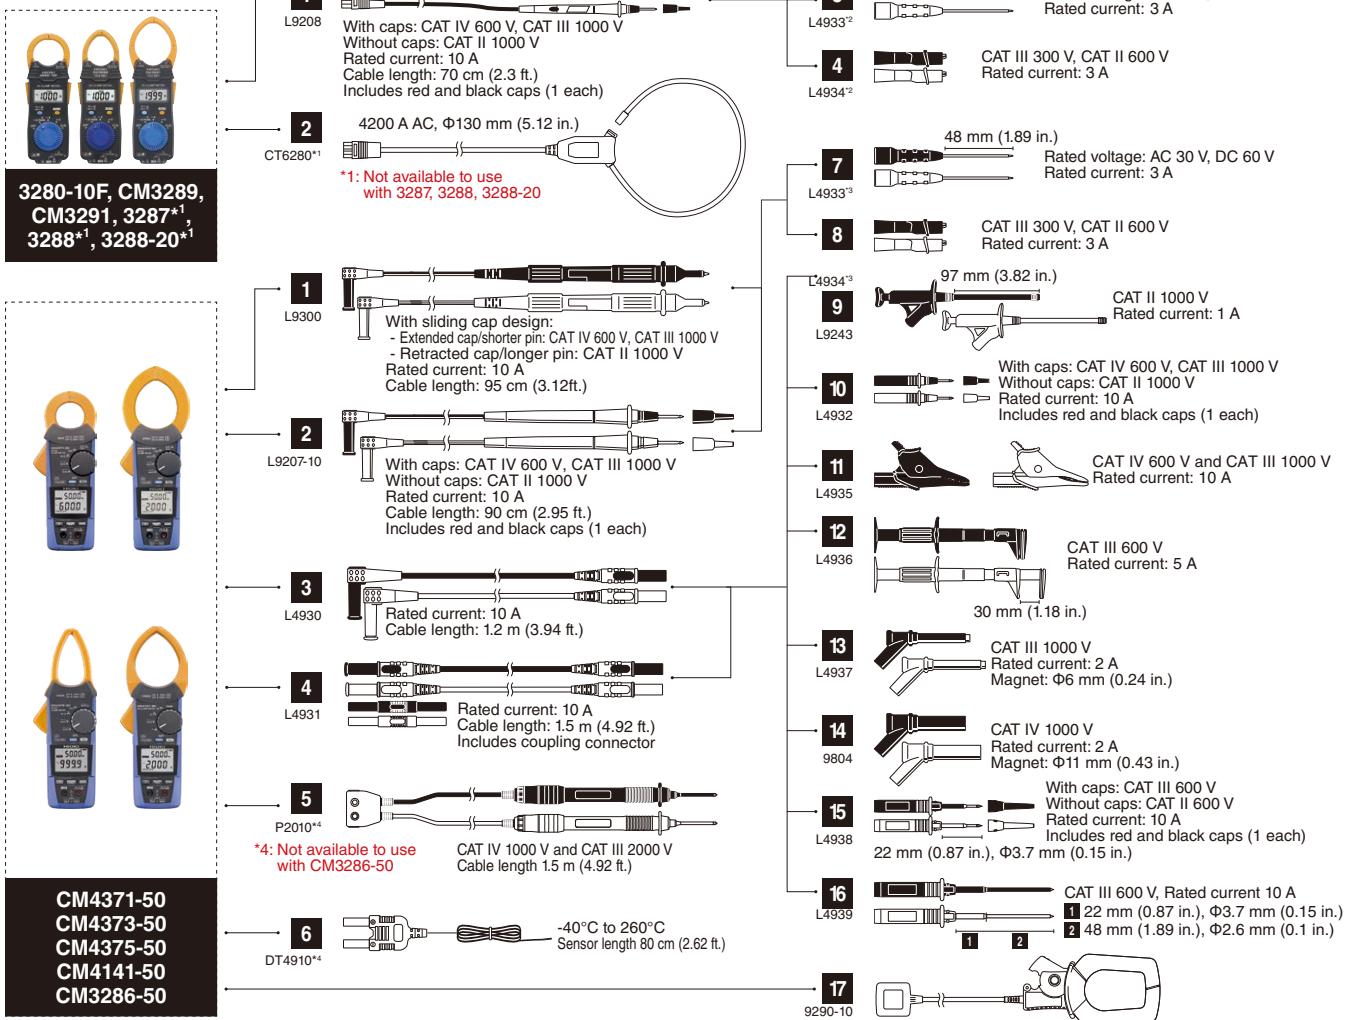



INSULATION TESTERS

Drop proof

Built tough to withstand a 1-meter drop onto a concrete floor

**5 ranges**

Rated output voltage (DC)
Effective maximum indicated value

50 V , 100 MΩ
125 V , 250 MΩ
250 V , 500 MΩ
500 V , 2000 MΩ
1000 V , 4000 MΩ

Manage Measurement Data Using Bluetooth® Communication

WIRELESS ADAPTER
Z3210 (option)
Attach to enable
Bluetooth® wireless
technology




Learn More

Transport to the Excel® file

Open an Excel® file and select a cell. The measured value being held on the instrument's display will be transferred to the computer and entered into the selected cell.

Transport to Gennect Cross

Gennect Cross, a free app designed specifically for use with Hioki measuring instruments, lets you check and manage measurement results and create reports. The software provides a range of functionality that helps manage data in the field, including photographing measurement sites, placing measurement results on photographs, and saving handwritten memos.

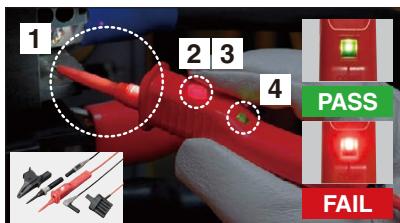Significantly Improve Testing Speed using Test Lead with Remote Switch

- 1 LED light shines a spotlight on the target
- 2 Red light warns of live voltage detection
- 3 Measurement start switch
- 4 Identify pass/fail decisions with red or green light

TEST LEAD SET WITH REMOTE SWITCH L9788-11 (option)
*Standard with the IR4059 and IR4056-21

Identify PASS/FAIL using Light and Sound

Compare measured values to pre-set reference values to generate a pass or fail decision with the Comparator function.

Convenient for Inspections**Low resistance measurement¹**

Perform EV and HEV continuity checks as well as resistance measurement of protective conductors in facility electrical equipment as defined by IEC 60364.


AC/DC voltage measurement

Automatically detect AC or DC for testing. Use as a tester thanks to DC voltage measurement functionality.

PV Ω dedicated function²

Measurement is not affected even when the PV system is online.

¹ Excludes IR4053 ² IR4053 Only

One-touch Start and Stop


Measurement voltage is applied while MEASURE key is pressed



Lift and lock the MEASURE key to apply a continuous stream of voltage

Prevent Accidental High Voltage Generation

Under [500V], [1000V], or [PVΩ] settings, the RELEASE button will blink. Press to unlock the release of high voltages as an extra safety measure.





Product warranty for 3 years
Accuracy guaranteed for 1 year

Clamp

Insulation

DMMs

Detectors

Earth

Power quality

Power loggers

Battery

PV

Logger

LAN

Lux

Temperature

Resistance

Lineup - Digital

Measurement type	Low voltage (less than 1000 V)				High voltage (less than 5000 V)	
	Standard	High-speed	EV	PV		Standard
Model	IR4056-20 IR4056-21	IR4057-50	IR4059	IR4053-10	IR5051	IR5050
Appearance						
Number of ranges	5				5	
Applied voltage (DC) and effective maximum indicated value	50 V, 100 MΩ 125 V, 250 MΩ 250 V, 500 MΩ 500 V, 2000 MΩ 1000 V, 4000 MΩ				250 V, 500 GΩ 500 V, 1.00 TΩ 1000 V, 2.00 TΩ 2500 V, 5.00 TΩ 5000 V, 10.00 TΩ	
PV Ω measurement	N/A			500 V, 2000 MΩ 1000 V, 4000 MΩ	500 V, 100 GΩ 1000 V, 100 GΩ 1500 V, 100 GΩ	N/A
Leakage current measurement	N/A				0.00 nA to 2.00 mA	
DC voltage measurement	600 V			1000 V	2000 V	
AC voltage measurement	600 V				1000 V	
Low resistance measurement	✓			N/A	N/A	
Displaying 1-min. values	N/A	✓	✓	N/A	N/A	
Comparator decision response time	✓ 0.8 second	✓ 0.3 second	✓ 0.8 second (PV: 4 second)		N/A	
AUTO power save	✓				✓	
Bluetooth® communication	N/A	✓ (with Z3210)	✓ (with Z3210)	N/A	✓ (with Z3210)	
Resistance gauge	N/A	✓	✓	N/A	✓	
Backlight	✓				✓	
Safety standard category	CAT III 600 V				CAT IV 1000 V CAT III 2000 V	
CE	✓ ¹				✓	
Dustproof and waterproof	IP40 ²				IP40 ^{2,3} , IP65 ⁴	
Drop proof	✓				N/A	
Power supply	LR03 (AAA) alkaline battery × 4 HR6 (AA) NiMH rechargeable battery × 4				LR6 (AA) alkaline battery × 8 HR6 (AA) NiMH rechargeable battery × 8	
Dimensions (W × H × D)	159 × 177 × 53 mm 6.26 × 6.97 × 2.09 in.	160 × 98 × 46 mm 6.30 × 3.86 × 1.81 in.	159 × 177 × 53 mm 6.26 × 6.97 × 2.09 in.	195 × 254 × 89 mm 7.68 × 10 × 3.50 in.		
Weight	600 g (21.2 oz.)	640 g (22.6 oz.)	536 g (18.9 oz.)	600 g (21.2 oz.)	1.7 kg (59.97 oz.)	

¹ IR4056-21 excluded ² Terminals are excluded ³ When the protector is attached ⁴ When stored in attached CARRYING CASE C0212



Product warranty for 3 years
Accuracy guaranteed for 1 year

Lineup - Analog Meters

Measurement parameters	3 Ranges	3490				
			Applied voltage (DC)	250 V	500 V	1000 V
			Effective maximum indicated value	100 MΩ	4000 MΩ	
			1st effective measuring range	0.05 MΩ to 50 MΩ	2 MΩ to 1000 MΩ	
			2nd effective measuring range	0.01 MΩ to 0.05 MΩ or less 50 MΩ to 100 MΩ	0.5 MΩ to 2 MΩ 1000 MΩ to 4000 MΩ	
	IR4016 -20		Applied voltage (DC)	500 V		
			Effective maximum indicated value	100 MΩ		
			1st effective measuring range	0.1 MΩ to 50 MΩ		
			2nd effective measuring range	0.01 MΩ to 0.1 MΩ or less 50 MΩ or more to 100 MΩ		
	IR4017 -20		Applied voltage (DC)	500 V		
			Effective maximum indicated value	1000 MΩ		
			1st effective measuring range	1 MΩ to 500 MΩ		
			2st effective measuring range	0.5 MΩ to 1 MΩ or less 500 MΩ or more to 1000 MΩ		
	IR4018 -20		Applied voltage (DC)	1000 V		
			Effective maximum indicated value	2000 MΩ		
			1st effective measuring range	2 MΩ to 1000 MΩ		
			2nd effective measuring range	1 MΩ to 2 MΩ or less 1000 MΩ or more to 2000 MΩ		
Accuracy (insulation)				±2% of scale length (1st effective measuring range) ±2% of scale length (2nd effective measuring range)		
AC Voltage				0 to 600 V		

Operating temperature	0°C to 40°C, 90% RH or less (non-condensating)
Storage temperature	-10°C to 50°C, 90% RH or less (non-condensating)
Dustproof and waterproof	IP40 (terminal excluded)
Drop proof	YES
Backlight	YES
Safety standard category	CAT III 600 V
Standards	EN61010 (Safety), EN61326 (EMC)
Power supply	LR6 alkaline battery × 4
Continuous operating time	20 hours
Dimensions (W × H × D)	3490: 162 × 167 × 52 mm (6.38 × 6.57 × 2.05 in.) IR4016, IR4017, IR4018: 162 × 182 × 57 mm (6.38 × 7.17 × 2.24 in.)
Weight	3490: 840 g (29.6 oz.), IR4016, IR4017, IR4018: 820 g (28.9 oz.)

Included accessories



L9787

- TEST LEAD L9787 (1.2 m)
- Neck strap
- LR6 alkaline battery × 4
- Instruction manual

Order code	3490
Order code	IR4016-20
Order code	IR4017-20
Order code	IR4018-20

Clamp	
Insulation	
DMMS	
Detectors	
Earth	
Power quality	
Power loggers	
Battery	
PV	
Logger	
LAN	
Lux	
Temperature	
Resistance	

INSULATION TESTER IR4056-20, IR4056-21



- TEST LEAD L9787
- Neck strap
- LR6 alkaline battery x 4
- Instruction manual

IR4056-20



- TEST LEAD SET WITH REMOTE SWITCH L9788-11
- Neck strap
- LR6 alkaline battery x 4
- Instruction manual

IR4056-21

Not CE marked



Product warranty for 3 years

Accuracy guaranteed for 1 year



Comparator decision response time : 0.8 s

5 ranges

CAT III 600 V

INSULATION TESTER IR4057-50, IR4059



WIRELESS ADAPTER Z3210 (option)

Attach to enable Bluetooth® wireless technology

With Z3210



Please see www.hioki.com for list of supported regions.



IR4057-50

IR4059



Product warranty for 3 years

Accuracy guaranteed for 1 year



Comparator decision response time : 0.3 s

Digital bar graph

5 ranges

CAT III 600 V

Included accessories

- CONNECTION CABLE L4930
- ALLIGATOR CLIP SET L4935
- TEST PIN SET L4938
- TEST LEAD SET WITH REMOTE SWITCH (RED L9788-10 (IR4059 only))
- PROTECTOR Z5042 (IR4059 only)
- Neck strap
- LR6 alkaline battery x 4
- Instruction manual



Product warranty for 3 years

Accuracy guaranteed for 1 year

INSULATION TESTER (for Photovoltaic Generation Systems) IR4053-10



- TEST LEAD L9787
- Neck strap
- LR6 alkaline battery x 4
- Instruction manual

IR4053-10



Comparator decision response time : 0.8 s

Comparator decision response time (PV) : 4 s

5 ranges

CAT III 600 V

Model	IR4053	IR4053	IR4053	Basic accuracy						-
				Applied voltage (DC)		50 V	125 V	250 V	500 V	
Insulation resistance	✓	✓	✓	Effective maximum indicated value (MΩ)	100	250	500	2000	4000	-
				1st effective measuring range (MΩ)	0.200 to 10.0	0.200 to 25.0	0.200 to 50.0	0.200 to 500	0.200 to 1000	±2% rdg. ±2 dgt.
				2nd effective measuring range (MΩ)	10.1 to 100.0	25.1 to 250	50.1 to 500	501 to 2000	1010 to 4000	±5% rdg.
PV Ω measurement	N/A	✓	✓	Applied voltage (DC)		500 V		1000 V		-
				Effective maximum indicated value (MΩ)	2000			4000		-
				1st effective measuring range (MΩ)	0.200 to 500			0.200 to 1000		±4% rdg.
DC Voltage	N/A	✓	✓	2nd effective measuring range (MΩ)	501 to 2000			1010 to 4000		±8% rdg.
				4.200 V, 42.00 V, 420.0 V, 1000 V						±1.3% rdg. ±4 dgt. ¹⁾
				4.200 V, 42.00 V, 420.0 V, 600 V						±1.3% rdg. ±4 dgt. ¹⁾
AC Voltage	✓	✓	✓	420.0 V ²⁾ , 600 V						±2.3% rdg. ±8 dgt. ¹⁾
Low resistance measurement	✓	N/A	10.00 Ω, 100.0 Ω, 1000 Ω							±3% rdg. ±2 dgt.

Operating temperature	IR4056-20, IR4056-20, IR4057-50, IR4059: -25°C to 65°C, 90% RH or less (non-condensating) IR4053: 0°C to 50°C, 90% RH or less (non-condensating)	Order code IR4056-20
Storage temperature	IR4056-20, IR4056-20, IR4057-50, IR4059: -25°C to 65°C, 90% RH or less (non-condensating) IR4053: -10 °C to 50°C, 90% RH or less (non-condensating)	Order code IR4056-21
Dustproof and waterproof Standards	IP40 (terminal excluded) EN61326 (EMC), EN61557-1/2/4 ³⁾ /10	Order code IR4057-50
Power supply	LR6 alkaline battery x 4	Order code IR4057-90
Continuous operating time	20 hours	Order code IR4059
Dimensions (W x H x D)	IR4056-20, IR4056-21, IR4057-50, IR4053-10: 159 x 177 x 53 mm (6.26 x 6.97 x 2.09 in.) IR4059: 160 x 98 x 46 mm (6.30 x 3.86 x 1.81 in.)	Order code IR4053-10
Weight	IR4056-20, IR4056-21, IR4057-50: 600 g (21.2 oz.) IR4059: 536 (18.9 oz.) IR4057-50: 640 g (22.6 oz.)	Order code Z3210 Model IR4057-90 includes Z3210 as a set

¹⁾ Ranges in excess of 600 V, 1000 V are outside the accuracy guarantee²⁾ Minimum indicated value: 30.0 V³⁾ Subclause 4.3 of Part 4 (interchanging of test leads) is not applicable when L9788-10 is used



Product warranty for 3 years
Accuracy guaranteed for 1 year

HIGH VOLTAGE INSULATION TESTER IR5050, IR5051



IR5050

IR5051
IR5051-90 (include Z3210 as a set)

Standard

For PV systems

5 ranges

CAT IV 1000 V, CAT III 2000 V

Order code **IR5050**Order code **IR5051**Order code **IR5051-90**

Included accessories



- TEST LEAD L9850-01 (red), -02 (black), -03 (blue), 3 m (9.84 ft.)
- ALLIGATOR CLIP L9851-01 (red), -02 (black), -03 (blue)
- CARRYING CASE C0212
- LR6 alkaline battery × 8
- Instruction manual
- TEST PIN SET L9852 (IR5051 and IR5051-90 only)
- WIRELESS ADAPTER Z3210 (IR5051-90 only)

L9850, L9851

Options

**IR4016-20, IR4017-20, IR4018-20, IR4056-20,
IR4056-21, IR4057-50, IR4057-90, IR4053-10,
IR4059, 3490**

- 1 TEST LEAD SET WITH REMOTE SWITCH L9788-11
- 2 TEST LEAD WITH REMOTE SWITCH (RED) L9788-10
- 3 TIP PIN L9788-90
- 4 BREAKER PIN L9788-92
- 5 MAGNETIC ADAPTER 9804-01
- 6 MAGNETIC ADAPTER 9804-02
- 7 TEST LEAD L9787
- 8 CONNECTION CABLE SET L4930
- 9 ALLIGATOR CLIP SET L4935
- 10 TEST PIN SET L4938
- 11 BREAKER PIN L9787-91
- 12 WIRELESS ADAPTER Z3210 (for IR4057-50, IR4059)
- 13 PROTECTOR Z5042 (for IR4059)
- 14 CARRYING CASE C0213 (EV MAINTENANCE MANUAL INCLUDED)
- 15 FUSE SET Z5052 (for IR4056, IR4057, and IR4059)




IR5050, IR5051

- 1 TEST LEAD L9850-01 Red, 3 m (9.84 ft.)
- 2 TEST LEAD L9850-02 Black, 3 m (9.84 ft.)
- 3 TEST LEAD L9850-03 Blue, 3 m (9.84 ft.)
- 4 TEST LEAD L9850-11 Red, 10 m (32.81 ft.)
- 5 TEST LEAD L9850-12 Black, 10 m (32.81 ft.)
- 6 TEST LEAD L9850-13 Blue, 10 m (32.81 ft.)
- 7 ALLIGATOR CLIP L9851-01 Red
- 8 ALLIGATOR CLIP L9851-02 Black
- 9 ALLIGATOR CLIP L9851-03 Blue
- 10 TEST PIN SET L9852 Red and black
- 11 CARRYING CASE C0212
- 12 WIRELESS ADAPTER Z3210
- 13 COMMUNICATION PACKAGE DT4900-01 USB

		CATS		DISPLAY HOLD	AUTO OFF
Insulation resistance	Applied voltage (DC) and measurement range	250 V	0.00 MΩ to 500 GΩ		
		500 V	0.00 MΩ to 1.00 TΩ		
		1000 V	0.00 MΩ to 2.00 TΩ		
		2500 V	0.00 MΩ to 5.00 TΩ		
		5000 V	0.00 MΩ to 10.00 TΩ		
Measurement parameters	Rated current	1 mA to 1.2 mA			
	Short-circuit current	2 mA or less			
	Accuracy	±5% rdg. ±5 dgt., ±20% rdg.			
	Induced noise removal	3 mA max.			
Leakage current		10 nA, 100 nA, 1000 nA, 10 μA, 100 μA, 1 mA			
		Guaranteed accuracy range: 1.00 nA to 3.00 mA			
		Accuracy: ±3% rdg. ±3 dgt.			
DC voltage		±10 V to ±2000 V			
		Accuracy: ±3% rdg. ±3 dgt.			
AC voltage		30 V to 1000 V			
		Accuracy: ±3% rdg. ±3 dgt.			
Capacitance		100 nF, 1000 nF, 10 μF			
		Guaranteed accuracy range: 10.0 nF to 25.0 μF			
		Accuracy: ±10% rdg. ±5 nF			
PV insulation resistance (IR5051 only)	500 V	0.00 MΩ to 100 GΩ			
	1000 V	0.00 MΩ to 100 GΩ			
	1500 V	0.00 MΩ to 100 GΩ			
Other	Operating temperature and humidity range	-20°C to 40°C, less than 80% RH (no condensation)* ¹			
		40°C to 45°C, less than 60% RH (no condensation)* ¹			
		45°C to 50°C, less than 50% RH (no condensation)* ¹			
	Storage temperature and humidity range	-25°C to 65°C, less than 80% RH (no condensation)* ¹			
	Dustproof/waterproof	IP40 ¹ , IP65 (CARRYING CASE C0212)			
	Standards	EN IEC61010 (safety), EN61326 (EMC), IEC61557-1, -2 (insulation resistance tester)			
	Power supply	LR6 (AA) alkaline battery × 8:			
		• Approx. 5 hours without Z3210 installed			
		• Approx. 4 hours with Z3210 installed and using wireless communication			
	Dimensions (W × H × D)	195mm (7.68 in.) × 254 mm (10 in.) × 89 mm (3.50 in.)			
	Weight	1.7 kg (59.97 oz.)			

*1: With protector attached, excluding terminals

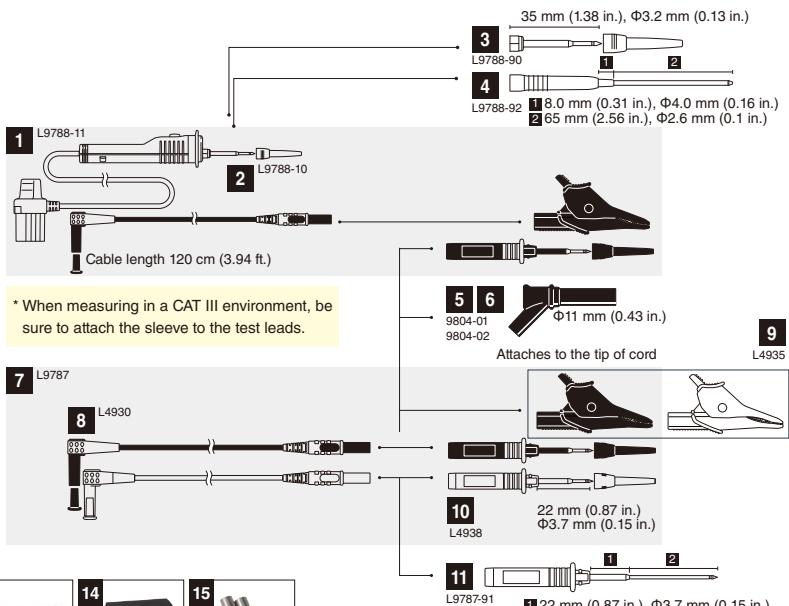



DMM TESTERS

Safely Inspects and Easily Manages Measurement Data for High-Voltage Solar Power Generation

High voltage measurement up to CAT III 2000 V by connecting "P2010"



CAT IV 1000 V
CAT III 2000 V



DC HIGH VOLTAGE PROBE P2010 (options)

Supports wireless communication to increase work efficiency



Cooperation with Gennect Cross




WIRELESS ADAPTER Z3210 (options)



DT4261

Designed and Manufactured in Japan

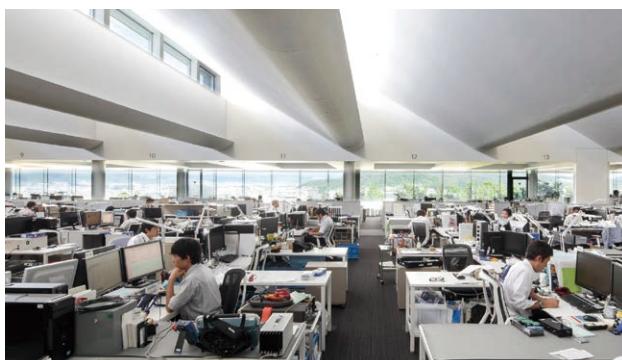

Development, design, and manufacturing processes for almost all Hioki digital multimeters are carried out at our headquarters in Nagano Prefecture.

Withstand a 1-meter Drop onto a Concrete Floor




Products are dropped repeatedly until they are damaged in order to validate their impact performance. Test results are used to make design improvements and enhance durability.

Accurately Measure the Voltage of the Secondary Side of Inverters



Non-distorted current waveforms




Voltage waveforms with harmonic components




True RMS Measurement Correctly Captures Distorted Current Waveforms



Non-distorted current waveforms



Distorted waveforms due to switching power supplies



The secondary side of inverters include harmonic components. Waveforms containing harmonics are distorted and difficult to measure with accuracy. By using a low-pass filter to remove harmonic components, accurate measurement values can be obtained.

A measuring instrument uses one of two rectification methods, "True RMS" or "Mean". Using mean rectification assumes that the signal is based on a sine wave without distortions in order to calculate the value. Distorted waveforms cannot be measured accurately using this method.

Lineup

Clamp	
Insulation	
DMMS	
Detectors	
Earth	
Power quality	
Power loggers	
Battery	
PV	
Logger	
LAN	
Lux	
Temperature	
Resistance	

Measurement type	Electrical work	General use	Solar power, General use	General use	Air conditioning, instrumentation	Electrical work
Model	High-end models		New standard model	Standard models		
	DT4281	DT4282	DT4261	DT4252	DT4253	DT4255
Appearance						
AC measurement system	True RMS	True RMS	True RMS	True RMS	True RMS	True RMS
Display counts	60000	60000	6000	6000	6000	6000
DCV typical accuracy	±0.025% rdg. ±2 dgt.	±0.025% rdg. ±2 dgt.	±0.15% rdg. ±2 dgt.	±0.2% rdg. ±5 dgt.	±0.3% rdg. ±5 dgt.	±0.3% rdg. ±3 dgt.
Frequency characteristics	20 Hz to 100 kHz	20 Hz to 100 kHz	40 Hz to 1 kHz	40 Hz to 1 kHz	40 Hz to 1 kHz	40 Hz to 1 kHz
Measurement parameters	DC voltage (resolution)	1000 V (0.001 mV)	1000 V (0.001 mV)	1000 V, 2000 V ¹ (0.1 mV)	1000 V (0.1 mV)	1000 V (0.1 mV)
	AC voltage (resolution)	1000 V (0.001 mV)	1000 V (0.001 mV)	1000 V (0.001 V)	1000 V (0.001 V)	1000 V (0.001 V)
	DCV + ACV	1000 V	1000 V	1000 V	N/A	N/A
	DC current (resolution)	600 mA (0.01 µA)	10 A (0.01 µA)	10 A (0.1 mA)	10 A (0.001 A)	60 mA (0.01 µA)
	AC current (resolution)	600 mA (0.01 µA)	10 A (0.01 µA)	10 A (0.1 mA)	10 A (0.001 A)	N/A
	AC current (clamp)	1000 A	N/A	1000 A	N/A	1000 A
	Resistance	600 MΩ	600 MΩ	60 MΩ	60 MΩ	60 MΩ
	Temperature	-40°C to 800°C	-40°C to 800°C	N/A	N/A	-40°C to 400°C
	Capacitance	100 mF	100 mF	10 mF	10 mF	10 mF
	Frequency	500 kHz	500 kHz	99 kHz	99 kHz	99 kHz
	Continuity check	✓	✓	✓	✓	✓
	Diode check	✓	✓	✓	✓	✓
	Conductance	N/A	✓	N/A	N/A	N/A
	Voltage detection	N/A	N/A	N/A	N/A	✓
Additional functions	AUTO AC/DCV	N/A	N/A	✓	N/A	✓
	MAX/MIN/AVG	MAX/MIN	MAX/MIN	✓	✓	✓
	PEAK display	✓	✓	✓	N/A	N/A
	Relative display	✓	✓	N/A	✓	✓
	Decibel conversion	✓	✓	N/A	N/A	N/A
	Percentage conversion display (4-20 mA)	✓	✓	N/A	N/A	✓
	AUTO range	✓	✓	✓	✓	✓
Display	Hold display value	AUTO /MANUAL	AUTO /MANUAL	AUTO /MANUAL	AUTO /MANUAL	AUTO /MANUAL
	Dual display	✓	✓	✓	✓	✓
	Bar graph display	N/A	N/A	✓	✓	✓
	Backlight	✓	✓	✓	✓	✓
	Internal memory	✓	✓	N/A	N/A	N/A
Bluetooth® communication	USB communication ²	✓	✓	✓	✓	✓
	Bluetooth® communication	N/A	N/A	✓ (with Z3210)	N/A	N/A
Safety	Mis-insertion prevention shutters	✓	✓	✓	N/A	N/A
	Circuit breaker false trip prevention	N/A	N/A	N/A	N/A	N/A
	Safety standard category	CAT IV 600 V CAT III 1000 V	CAT IV 600 V CAT III 1000 V	CAT IV 600 V CAT III 1000 V	CAT IV 600 V CAT III 1000 V	CAT IV 600 V CAT III 1000 V
	CE	✓	✓	✓	✓	✓
	Dustproof and waterproof	IP40	IP40	IP54 ³	IP40 (when operating) IP42 (while in storage) *3 *4	IP40 (when operating) IP42 (while in storage) *3 *4
	Drop proof	✓	✓	✓	✓	✓
	Auto power off	✓	✓	✓	✓	✓
Power supply		LR6 x4 alkaline battery	LR6 x4 alkaline battery	LR6 x3 alkaline battery	LR03 x4 alkaline battery	LR03 x4 alkaline battery
Dimensions (W x H x D)		93 x 197 x 53 mm 3.66 x 7.76 x 2.09 in.	93 x 197 x 53 mm 3.66 x 7.76 x 2.09 in.	87 x 185 x 47 mm 3.43 x 7.28 x 1.85 in.	84 x 174 x 52 mm 3.31 x 6.85 x 2.05 in.	84 x 174 x 52 mm 3.31 x 6.85 x 2.05 in.
Weight		650 g, 22.9 oz.	650 g, 22.9 oz.	480 g, 16.9 oz.	390 g, 13.8 oz.	390 g, 13.8 oz.

Clamp
Insulation
DMMS
Detectors
Earth
Power quality
Power loggers
Battery
PV
Logger
LAN
Lux
Temperature
Resistance

*1: 2000 V is supported only when using the optional DC HIGH VOLTAGE PROBE P2010 *2: Requires optional COMMUNICATION PACKAGE (USB) DT4900-01 *3: Do not use in wet conditions.
*4: Excludes measuring terminals

Measurement type	General use	Electrical work	General use	Electrical work	Electrical work	Electrical work
Model	Standard models DT4256	Pocket models DT4223	DT4224	3030-10	3244-60	3246-60
Appearance						
AC measurement system	True RMS	True RMS	True RMS	N/A	MEAN Value	MEAN Value
Display count	6000	6000	6000	N/A	4199	4199
DCV typical accuracy	±0.3% rdg. ±3 dgt.	±0.5% rdg. ±5 dgt.	±0.5% rdg. ±5 dgt.	f.s. reading ±2.5%	±0.7% rdg. ±4 dgt.	±1.3% rdg. ±4 dgt.
Frequency characteristics	40 Hz to 1 kHz	40 Hz to 1 kHz	40 Hz to 1 kHz	N/A	50 Hz to 500 Hz	50 Hz to 500 Hz
Measurement parameters	DC voltage (resolution) 1000 V (0.1 mV)	600 V (0.1 mV)	600 V (0.1 mV)	600 V	500 V (0.1 mV)	600 V
	AC voltage (resolution) 1000 V (0.001 V)	600 V (0.001 V)	600 V (0.001 V)	600 V	500 V (0.001 V)	600 V
	DCV + ACV	N/A	N/A	N/A	N/A	N/A
	DC current (resolution) 10 A (0.01 mA)	N/A	N/A	300 mA	N/A	N/A
	AC current (resolution) 10 A (0.1 mA)	N/A	N/A	N/A	N/A	N/A
	AC current (clamp)	1000 A	N/A	N/A	N/A	N/A
	Resistance	60 MΩ	60 MΩ	60 MΩ	3 kΩ	42 MΩ
	Temperature	N/A	N/A	N/A	150°C	N/A
	Capacitance	10 mF	N/A	10 mF	N/A	N/A
	Frequency	99 kHz	9.9 kHz	9.9 kHz	N/A	N/A
	Continuity check	✓	✓	✓	N/A	✓
	Diode check	✓	N/A	✓	N/A	✓
	Conductance	N/A	N/A	N/A	N/A	N/A
	Voltage detection	✓	✓	N/A	N/A	N/A
Additional functions	AUTO AC/DCV	✓	✓	N/A	N/A	N/A
	MAX/MIN/AVG	✓	N/A	N/A	N/A	N/A
	PEAK display	N/A	N/A	N/A	N/A	N/A
	Relative display	✓	✓	✓	N/A	N/A
	Decibel conversion	N/A	N/A	N/A	N/A	N/A
	Percentage conversion display (4-20 mA)	N/A	N/A	N/A	N/A	N/A
	AUTO range	✓	✓	✓	N/A	✓
Display	Hold display value	AUTO /MANUAL	AUTO /MANUAL	AUTO /MANUAL	N/A	N/A
	Dual display	✓	N/A	N/A	N/A	N/A
	Bar graph display	✓	✓	✓	N/A	N/A
	Backlight	✓	✓	✓	N/A	✓
	Internal memory	N/A	N/A	N/A	N/A	N/A
Bluetooth® communication	USB communication ²	✓	N/A	N/A	N/A	N/A
	Bluetooth® communication	N/A	N/A	N/A	N/A	N/A
	Auto power off	✓	✓	✓	N/A	✓
Safety	Power supply	LR03 x4 alkaline battery	LR03 x 1 alkaline battery	LR03 x 1 alkaline battery	R6P x 2 manganese battery	CR2032 x 1 coin type battery
	Dimensions (W x H x D)	84 x 174 x 52 mm 3.31 x 6.85 x 2.05 in.	72 x 149 x 38 mm 2.83 x 5.87 x 1.50 in.	72 x 149 x 38 mm 2.83 x 5.87 x 1.50 in.	95 x 141 x 39 mm 3.74 x 5.55 x 1.54 in.	55 x 109 x 9.5 mm 2.17 x 4.29 x 0.37 in.
	Weight	390 g, 13.8 oz.	190 g, 6.7 oz.	190 g, 6.7 oz.	280 g, 9.9 oz.	60 g, 2.1 oz.
	Drop proof	✓	✓	✓	N/A	N/A
	Dustproof and waterproof	IP40 (when operating) IP42 (while in storage) *3 *4	IP40 (when operating) IP42 (while in storage) *3 *4	IP40 (when operating) IP42 (while in storage) *3 *4	N/A	N/A

DIGITAL MULTIMETER DT4281, DT4282



DT4281



DT4282

High-end models

60000 Counts

DCV typical accuracy: $\pm 0.025\%$ rdg. ± 2 dgt.

CAT IV 600 V, CAT III 1000 V

Premium DMMs Deliver
High Precision and
Full Array of Features

Extensive additional functionality

It is equipped with additional functions for more advanced measurements. It has a PEAK value display, useful for measuring ripple voltage in DC power supply systems, and a 4-20 mA and 0-20 mA conversion display, useful for measuring instrumentation signals.

- Display of maximum/minimum values
- Display of PEAK value
- Relative display
- Percent conversion 4-20 mA

Electrical work		
~V	=V	\approx V
Hz	dB	AUTO AC/DC
\approx	Ω	\approx
$^{\circ}$ C	\approx A	\approx A
\blacktriangleleft	CB	NCV

General use		
~V	=V	\approx V
Hz	dB	AUTO AC/DC
\approx	Ω	\approx
$^{\circ}$ C	\approx A	\approx A
\blacktriangleleft	CB	NCV

DIGITAL MULTIMETER DT4261



DT4261

New standard model

6000 Counts

DCV typical accuracy: $\pm 0.15\%$ rdg. ± 2 dgt.

CAT IV 600 V, CAT III 1000 V

With P2010 CAT IV 1000 V, CAT III 2000 V

Safely inspects for high-voltage
solar power generation

Safety and convenience

measurable up to
CAT III 2000 V.

DC HIGH VOLTAGE PROBE P2010 (options)

Bluetooth®
communication is
available

WIRELESS ADAPTER Z3210 (options)



Product warranty for 3 years
Accuracy guaranteed for 1 year

DIGITAL MULTIMETER DT4252, DT4253, DT4255, DT4256



DT4252



DT4253



DT4255



DT4256

General use		
~V	=V	\approx V
Hz	dB	AUTO AC/DC
\approx	Ω	\approx
$^{\circ}$ C	\approx A	\approx A
\blacktriangleleft	CB	NCV

Air conditioning, instrumentation		
~V	=V	\approx V
Hz	dB	AUTO AC/DC
\approx	Ω	\approx
$^{\circ}$ C	\approx A	\approx A
\blacktriangleleft	CB	NCV

Electrical work		
~V	=V	\approx V
Hz	dB	AUTO AC/DC
\approx	Ω	\approx
$^{\circ}$ C	\approx A	\approx A
\blacktriangleleft	CB	NCV

General use		
~V	=V	\approx V
Hz	dB	AUTO AC/DC
\approx	Ω	\approx
$^{\circ}$ C	\approx A	\approx A
\blacktriangleleft	CB	NCV

Standard models

6000 Counts

DCV typical accuracy: $\pm 0.3\%$ rdg. ± 5 dgt.

CAT IV 600 V, CAT III 1000 V

Choose from 4 Models to Fit Your Application

Equipped with specialized functions catering to your needs

Air conditioning, instrumentation

- Measure low currents with 60 μ A range
- Test temperature
- 4 to 20 mA % display
- Prevent short-circuit accidents with a fast-blow fuse and current-limiting resistor

Electrical work



Product warranty for 3 years
Accuracy guaranteed for 1 year

DIGITAL MULTIMETER DT4223, DT4224



DT4223



DT4224

Electrical work		
~V	=V	\approx V
Hz	dB	AUTO AC/DC
\approx	Ω	\approx
$^{\circ}$ C	\approx A	\approx A
\blacktriangleleft	CB	NCV

General use		
~V	=V	\approx V
Hz	dB	AUTO AC/DC
\approx	Ω	\approx
$^{\circ}$ C	\approx A	\approx A
\blacktriangleleft	CB	NCV

Pocket models

6000 Counts

DCV typical accuracy: $\pm 0.5\%$ rdg. ± 5 dgt.

CAT IV 300 V, CAT III 600 V

Compact and Convenient

Circuit breaker false trip prevention



Eliminate accidents such as tripped earth leakage breakers or flash arcs even when mistakenly inputting voltage while in resistance measurement mode



Model	DT4281	DT4282	Basic accuracy	Basic accuracy
DC voltage	✓	✓	60.00 mV, 600.00 mV, 6.0000 V, 60.000 V, 600.00 V, 1000.0 V	±0.025% rdg. ±2 dgt.
AC voltage	✓	✓	60.000 mV, 600.00 mV, 6.0000 V, 60.000 V, 600.00 V, 1000.0 V	±0.2% rdg. ±2 dgt.
DCV + ACV	✓	✓	6.0000 V, 60.000 V, 600.00 V, 1000.0 V	±0.3% rdg. ±30 dgt.
DC current	N/A	600.00 µA, 6000.0 µA, 60.000 mA, 600.00 mA		±0.05% rdg. ±5 dgt.
	✓	600.00 µA, 6000.0 µA, 60.000 mA, 600.00 mA		±0.05% rdg. ±5 dgt.
AC current	N/A	600.00 µA, 6000.0 µA, 60.000 mA, 600.00 mA		±0.6% rdg. ±5 dgt.
AC current (clamp)	✓	N/A	600.00 µA, 6000.0 µA, 60.000 mA, 600.00 mA	±0.6% rdg. ±3 dgt.
Resistance	✓	✓	60.000 Ω, 600.00 Ω, 6.0000 kΩ, 60.000 kΩ, 600.00 kΩ, 6.0000 MΩ, 60.000 MΩ, 600.00 MΩ	±0.03% rdg. ±2 dgt.
Temperature	✓	✓	-40.0°C to 800.0°C	±0.5% rdg. ±3°C
Capacitance	✓	✓	1.000 nF, 10.00 nF, 100.0 nF, 1.000 µF, 10.00 µF, 100.0 µF, 1.000 mF, 10.00 mF, 100.0 mF	±1% rdg. ±5 dgt.
Frequency	✓	✓	99.999 Hz, 999.99 Hz, 9.9999 kHz, 99.999 kHz, 999.99 kHz, 99.999 kHz	±0.005% rdg. ±3 dgt.
Continuity check	✓	✓	(Short detection) 20/50/100/500 Ω or less, (open detection) 220/250/300/600 Ω or more	-
Diode check	✓	✓	0.15/0.5/1.0/2.0/2.5/3.0 V (continuous buzzer sound, flashing red light)	-
Conductance	N/A	✓	600.00 nS	-

Operating temperature	-15°C to 55°C (non-condensating)
Storage temperature	-30°C to 60°C (non-condensating)
Dustproof and waterproof	IP40
Standards	EN61010 (Safety), EN61326 (EMC)
Power supply	LR6 alkaline battery ×4
Continuous operating time	100 hours (backlight OFF)
Dimensions (W × H × D)	93 × 197 × 53 mm (3.66 × 7.76 × 2.09 in.)
Weight	650 g (22.9 oz.)

Included accessories


- L9300
- LR6 alkaline battery ×4
- Instruction manual

Order code **DT4281**Order code **DT4282****L9300**

Model	DT4252	DT4253	DT4255	DT4256	DT4261	Basic accuracy
DC voltage	N/A	✓	✓	✓	N/A	600.0 mV, 6.000 V, 60.00 V, 600.0 V, 1000 V
	✓	N/A	N/A	N/A	N/A	600.0 mV, 6.000 V, 60.00 V, 600.0 V, 1000 V
	N/A	N/A	N/A	N/A	✓	600.0 mV, 6.000 V, 60.00 V, 600.0 V, 1000 V, 2000 V ²
AC voltage	✓	✓	✓	✓	✓	6.000 V, 60.00 V, 600.0 V, 1000 V
	N/A	N/A	N/A	N/A	✓	6.000 V, 60.00 V, 600.0 V, 1000 V
	N/A	✓	N/A	N/A	N/A	60.00 µA, 600.0 µA, 6.000 mA, 60.00 mA
DC current	N/A	N/A	N/A	N/A	✓	60.00 mA, 600.0 mA, 6.000 A, 10.00 A
	N/A	N/A	N/A	N/A	✓	600.0 mA, 6.000 A, 10.00 A
	✓	N/A	N/A	N/A	N/A	6.000 A, 10.00 A
AC current	N/A	N/A	N/A	✓	✓	600.0 mA, 6.000 A, 10.00 A
	✓	N/A	N/A	N/A	N/A	6.000 A, 10.00 A
	N/A	✓	✓	✓	✓	10.00 A, 20.00 A, 50.00 A, 100.0 A, 200.0 A, 500.0 A, 1000 A
Resistance	✓	✓	✓	✓	✓	600.0 Ω, 6.000 kΩ, 60.00 kΩ, 600.0 kΩ, 6.000 MΩ, 60.00 MΩ
Temperature	N/A	✓	N/A	N/A	N/A	-40.0°C to 400.0°C
Capacitance	✓	✓	✓	✓	✓	1.000 nF, 10.00 nF, 100.0 nF, 1.000 µF, 10.00 µF, 100.0 µF, 1.000 mF, 10.00 mF
Frequency	✓	✓	✓	✓	✓	99.99 Hz, 999.99 Hz, 9.9999 kHz, 99.999 kHz, 999.99 kHz
Continuity check	✓	✓	✓	✓	✓	(Short detection) 25 Ω or less, (open detection) 245 Ω or more
Diode check	✓	✓	✓	✓	✓	0.15 V to 1.5 V (continuous buzzer sound, flashing red light)
Voltage detection	N/A	N/A	✓	✓	N/A	(Detection voltage range) 40 V AC to 600 V AC, (Detection frequency range) 50/60 Hz

Operating temperature	DT4255, DT4256, DT4261: -25°C to 65°C (non-condensating) DT4252, DT4253: -10°C to 50°C (non-condensating)
Storage temperature	DT4255, DT4256, DT4261: -30°C to 70°C (non-condensating) DT4252, 53: -30°C to 60°C (non-condensating)
Dustproof and waterproof	DT4252, DT4253, DT4255, DT4256: IP40 (when operating) IP42 (while in storage) ^{3*4} DT4261: IP54 ³
Standards	EN61010 (Safety), EN61326 (EMC)
Power supply	DT4252, DT4253, DT4255, DT4256: LR03 alkaline battery × 4
Continuous operating time	DT4252: 130 hours (backlight OFF)
Dimensions (W × H × D)	DT4252, DT4253, DT4255, DT4256: 84 × 174 × 52 mm (3.31 × 6.85 × 2.05 in.) DT4261: 87 × 185 × 47 mm (3.43 × 7.28 × 1.85 in.)
Weight	DT4252, DT4253, DT4255, DT4256: 390 g (13.8 oz.) DT4261: 480 g (16.9 oz.)

Included accessories


- Included with DT4252, DT4253, DT4254, DT4255
- L9300
- alkaline battery (LR03) × 4
- Instruction manual

Order code **DT4252**Order code **DT4253**Order code **DT4255**Order code **DT4256**Order code **DT4261**Order code **DT4261-90**Order code **Z3210**

- Included with DT4261
- L9300
- alkaline battery (LR6) × 3
- Instruction manual

Model DT4261-90 includes Z3210 as a set

Model	DT4223	DT4224	Basic accuracy
DC voltage	✓	✓	600.0 mV, 6.000 V, 60.00 V, 600.0 V
AC voltage	✓	✓	6.000 V, 60.00 V, 600.0 V
Resistance	✓	✓	600.0 Ω, 6.000 kΩ, 60.00 kΩ, 600.0 kΩ, 6.000 MΩ, 60.00 MΩ
Capacitance	N/A	✓	1.000 µF, 10.00 µF, 100.0 µF, 1.000 mF, 10.00 mF
Frequency	✓	✓	99.99 Hz, 999.9 Hz, 9.999 kHz
Continuity check	✓	✓	(Short detection) 25 Ω or less, (open detection) 245 Ω or more
Diode check	N/A	✓	0.15 V to 1.5 V (continuous buzzer sound, flashing red light)
Voltage detection	✓	N/A	(Detection voltage range) 80 V AC to 600 V AC, (Detection frequency range) 50/60 Hz
Operating temperature	-10°C to 65°C (non-condensating)		
Storage temperature	-30°C to 70°C (non-condensating)		
Dustproof and waterproof	IP40 (when operating), IP42 (while in storage) ^{1*2}		
Standards	EN61010 (Safety), EN61326 (EMC)		
Power supply	LR03 alkaline battery × 1		
Continuous operating time	40 hours (backlight OFF)		
Dimensions (W × H × D)	72 × 149 × 38 mm (2.83 × 5.87 × 1.50 in.)		
Weight	190 g (6.7 oz.)		

Included accessories


- DT4911
- LR03 alkaline battery × 1
- Instruction manual

Order code **DT4223**Order code **DT4224****DT4911**¹: Do not use in wet conditions ²: Excludes measuring terminals

HiTESTER 3030-10

Product warranty for 3 years
Accuracy guaranteed for 1 year



CAT III 600 V



Order code **3030-10**

Included accessories




- TEST LEAD L9207-30
- CARRYING CASE 9390
- R6P manganese battery x2
- Spare fuse
- Instruction manual

L9207-30

Options

- CONTACT PIN SET L4933
- SMALL ALLIGATOR CLIP SET L4934
- HIGH VOLTAGE PROBE 9017
- FUSE SET Z5051



Measurement parameters	DC Voltage	0.3 V, 3 V, 12 V, 30 V, 120 V, 300 V, 600 V Accuracy: $\pm 2.5\%$ of f.s. reading
	AC Voltage	12 V, 30 V, 120 V, 300 V, 600 V Accuracy: $\pm 2.5\%$ of f.s. reading, (12V: $\pm 4\%$)
	DC Current	60 μ A, 30 mA, 300 mA Accuracy: $\pm 3\%$ of f.s. reading
	Resistance	0 to 3k Ω : Rx1, Rx10, Rx100, Rx1k Accuracy: $\pm 3\%$ of scale length
	Battery check	0.9 to 1.8 V Accuracy: $\pm 6\%$ of f.s. reading
Other	Operating temperature	0°C to 40°C (non-condensating)
	Storage temperature	-10°C to 50°C (non-condensating)
	Power supply	R6P manganese battery x2
	Dimensions (W x H x D)	95 x 141 x 39 mm (3.74 x 5.55 x 1.54 in.)
	Weight	280 g (9.9 oz.)

CARD HiTESTER 3244-60

Product warranty for 3 years
Accuracy guaranteed for 1 year



CAT III 300V, CAT II 600V



CARRYING CASE C0204

Order code **3244-60**

Included accessories

- CARRYING CASE C0204
- Sleeves (red, black @ 1 each)
- CR2032 coin type battery x1
- Instruction manual



Measurement parameters	DC Voltage	420.0 mV, 4.200 V, 42.00 V, 420.0 V, 500 V Accuracy: $\pm 0.7\%$ rdg. ± 4 dgt.
	AC Voltage	4.200 V, 42.00 V, 420.0 V, 500 V Accuracy: $\pm 2.3\%$ rdg. ± 8 dgt.
	Resistance	420.0 Ω , 4.200 k Ω , 42.00 k Ω , 420.0 k Ω , 4.200 M Ω , 42.00 M Ω Accuracy: $\pm 2.0\%$ rdg. ± 4 dgt.
	Continuity check	Detection level: 50 Ω ± 40 Ω or less
	Operating temperature	0°C to 40°C (non-condensating)
Other	Storage temperature	-20°C to 60°C (non-condensating)
	Power supply	CR2032 coin type battery x1
	Dimensions (W x H x D)	55 x 109 x 9.5 mm (2.17 x 4.29 x 0.37 in.)
	Weight	60 g (2.1 oz.)

PENCIL HiTESTER 3246-60

Product warranty for 3 years
Accuracy guaranteed for 1 year



CAT IV 300 V, CAT III 600 V

Cord length
80 cm (2.62 ft.)

Test lead fits neatly
into back of instrument

Order code **3246-60**




Measurement parameters	DC Voltage	420.0 mV, 4.200 V, 42.00 V, 420.0 V, 600 V Accuracy: $\pm 1.3\%$ rdg. ± 4 dgt.
	AC Voltage	4.200 V, 42.00 V, 420.0 V, 600 V Accuracy: $\pm 2.3\%$ rdg. ± 8 dgt.
	Resistance	420.0 Ω , 4.200 k Ω , 42.00 k Ω , 420.0 k Ω , 4.200 M Ω , 42.00 M Ω Accuracy: $\pm 2.0\%$ rdg. ± 4 dgt.
	Continuity check	Detection level: 50 Ω ± 40 Ω or less
	Diode check	Judges the right direction only, Open terminal voltage 3.4 V or less
Other	Operating temperature	0°C to 40°C (non-condensating)
	Storage temperature	-20°C to 60°C (non-condensating)
	Power supply	CR2032 coin type battery x1
	Dimensions (W x H x D)	30 x 182 x 26.5 mm (1.18 x 7.17 x 1.04 in.)
	Weight	80 g (2.8 oz.)

Included accessories

- Sleeves (red, black @ 1 each)
- CR2032 coin type battery x1
- Instruction manual

Options

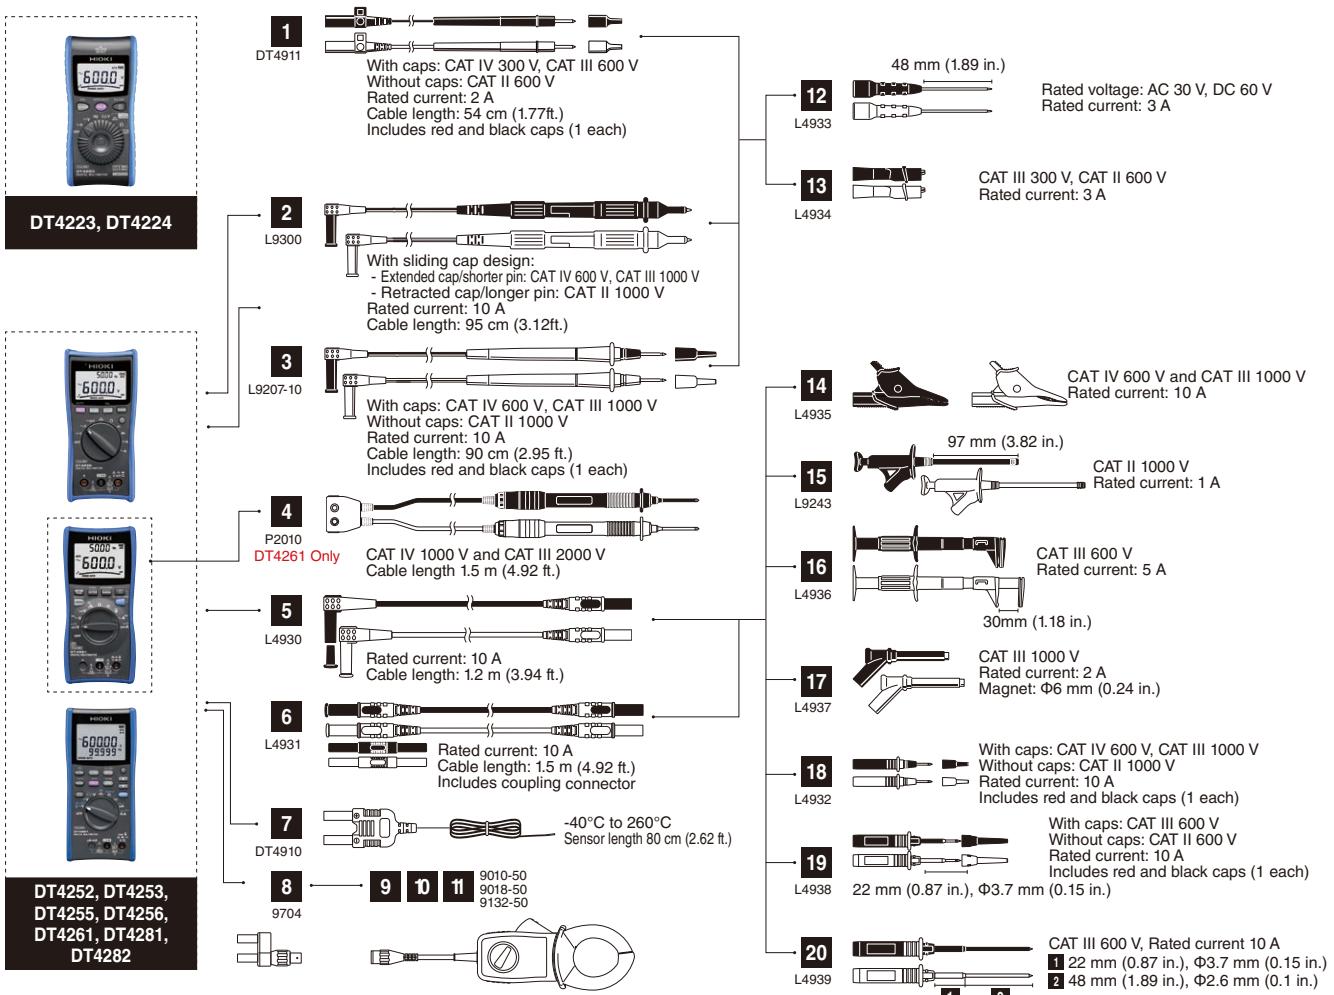

DT4223, DT4224, DT4252, DT4253, DT4255, DT4256, DT4261, DT4281, DT4282

1 TEST LEAD DT4911	With caps: CAT IV 600 V, CAT III 1000 V Without caps: CAT II 1000 V Rated current: 10 A
2 TEST LEAD L9300	CAT IV 600 V, CAT III 1000 V CAT II 1000 V 10 A
3 TEST LEAD L9207-10	With caps: CAT IV 600 V, CAT III 1000 V Without caps: CAT II 1000 V 10 A
4 DC HIGH VOLTAGE PROBE P2010	For DT4261 CAT IV 1000 V, CAT III 2000 V
5 CONNECTION CABLE L4930	10 A
6 EXTENSION CABLE SET L4931	10 A
7 THERMOCOUPLES (K) DT4910	
8 CONVERSION ADAPTER 9704	
9 AC CLAMP ON PROBE 9010-50 ²	500 A AC, Ø46mm, Frequency characteristics: 40 Hz to 1 kHz
10 AC CLAMP ON PROBE 9018-50 ²	500 A AC, Ø46mm, Frequency characteristics: 40 Hz to 3 kHz
11 AC CLAMP ON PROBE 9132-50 ²	1000 A AC, Ø55mm, Frequency characteristics: 40 Hz to 1 kHz
12 CONTACT PIN SET L4933	Frequency characteristics: 40 Hz to 1 kHz
13 SMALL ALLIGATOR CLIP SET L4934	AC 30 V, DC 60 V, 3 A
14 ALLIGATOR CLIP SET L4935	CAT III 300 V, CAT II 600 V, 3 A
15 GRABBER CLIP L9243	CAT II 1000 V, 1 A
16 BUS BAR CLIP SET L4936	CAT III 600 V, 5 A
17 MAGNETIC ADAPTER SET L4937	CAT III 1000 V, 2 A
18 TEST PIN SET L4932	With caps: CAT IV 600 V, CAT III 1000 V Without caps: CAT II 1000 V 10 A
19 TEST PIN SET L4938	With caps: CAT III 600 V Without caps: CAT II 600 V 10 A
20 BREAKER PIN L4939	CAT III 600 V, 10 A
21 COMMUNICATION PACKAGE (USB) DT4900-01	For DT4252, DT4253, DT4255, DT4256, DT4261, DT4281, DT4282 Windows 11/10
22 MAGNETIC STRAP Z5004	For DT4223, DT4224, DT4252, DT4253, DT4255, DT4256, DT4261
23 MAGNETIC STRAP Z5020	Extra strength
24 CARRYING CASE C0200	For DT4223, DT4224
25 CARRYING CASE C0201	For DT4252, DT4253, DT4255, DT4256

26 CARRYING CASE C0202 For DT4252, DT4253, DT4255, DT4256, DT4261, DT4281, DT4282

27 CARRYING CASE C0207


28 FUSE SET Z5053 DT4252, DT4256, DT4261, DT4282

29 FUSE SET Z5054 DT4281, DT4282, DT4255

30 FUSE SET Z5055 DT4253



² Adapter Model 9704 is required to connect AC CLAMP ON PROBES 9010-50, 9018-50 and 9132-50 to the DT4281, DT4253, DT4255, DT4256 or DT4261



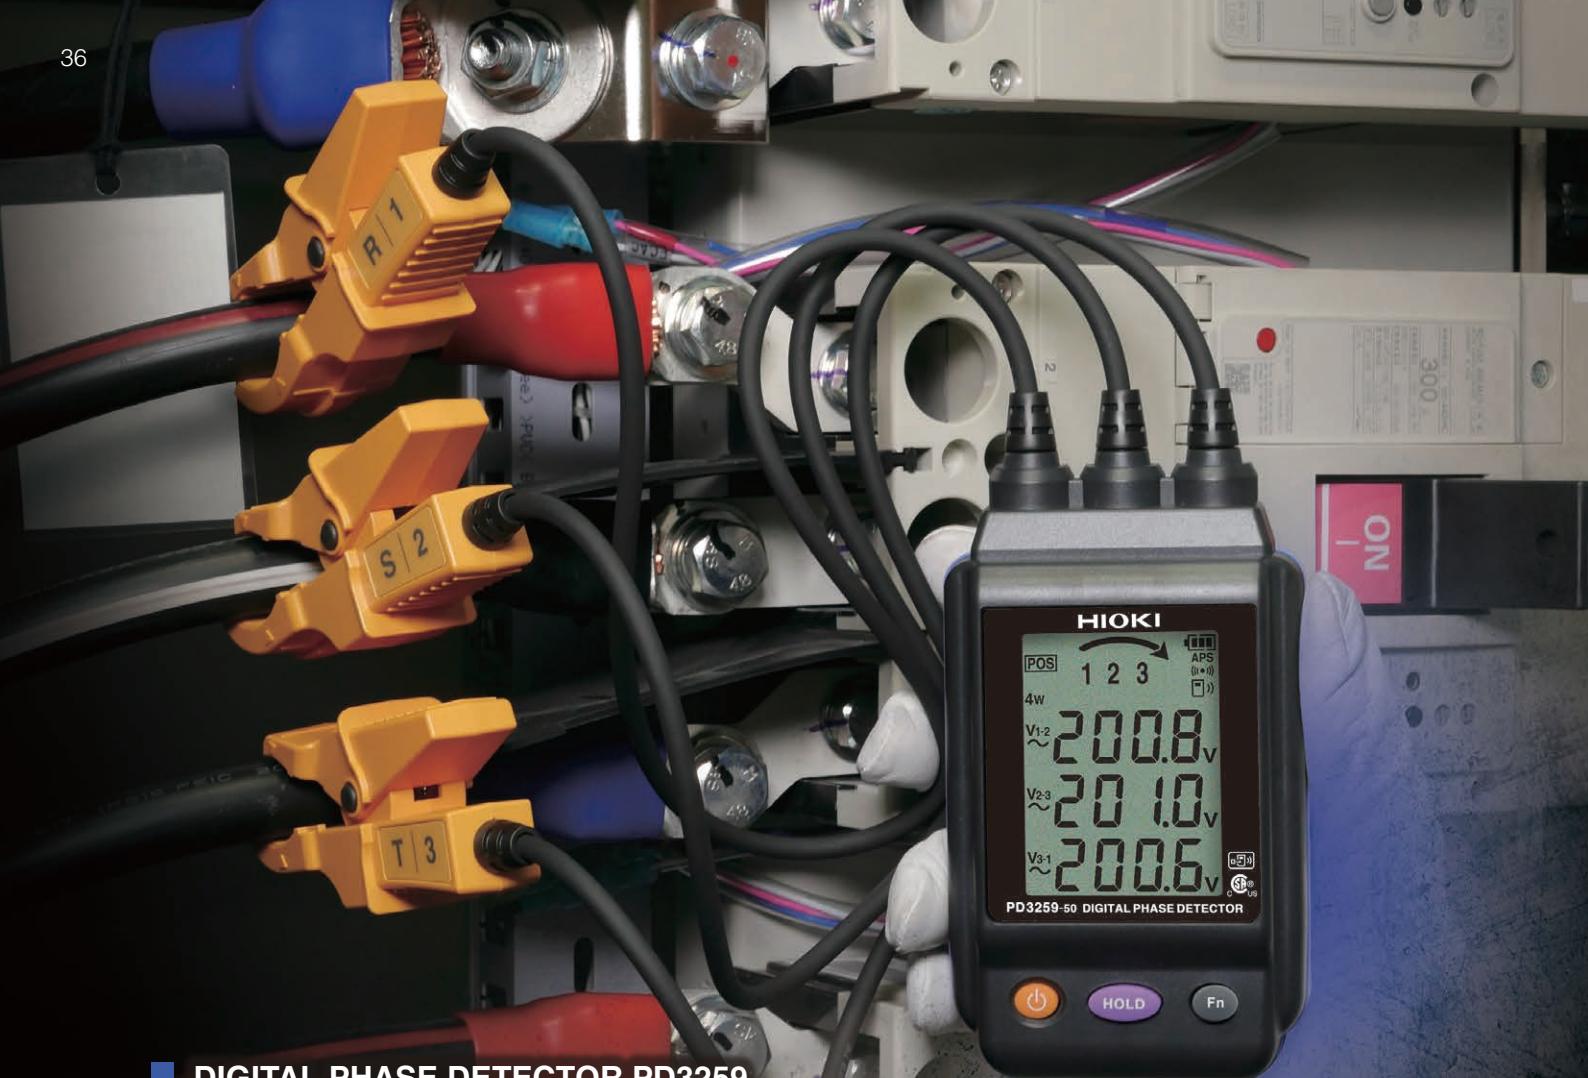

DIGITAL PHASE DETECTOR PD3259

Just Clip the Probes onto Covered Cables,
and Your 3-phase Power Line Inspection is Complete

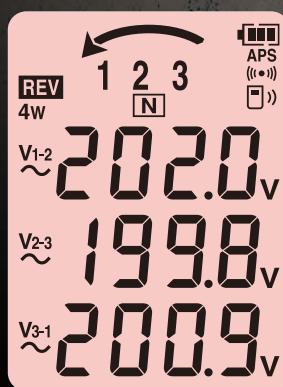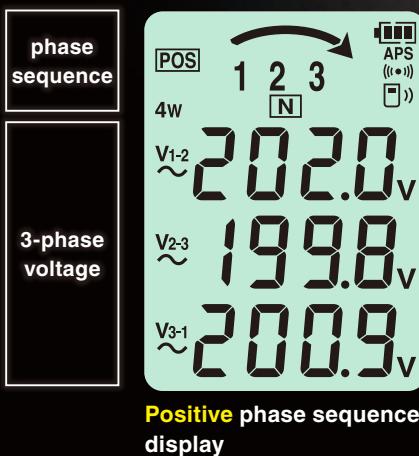

Display phase sequence, 3-phase voltage
Use as-is in work certification photos

PHASE DETECTORS VOLTAGE DETECTORS



Product warranty for 3 years
Accuracy guaranteed for 1 year

DIGITAL PHASE DETECTOR PD3259-50



Included accessories

- CARRYING CASE C0203

Dimensions:

W135 mm (5.31 in.) x H265 mm (10.43 in.) x D65 mm (2.56 in.)

- AA alkaline batteries (LR6) x4

- Color clips (white x2, red x2, blue x2, yellow x2)
- Spiral tubes (black x1)
- Instruction manual

Options

- MAGNETIC STRAP Z5020



Model PD3259-90 includes Z3210 as a set

Order code **PD3259-50**

Order code **PD3259-90**

Order code **Z3210**



C0203



Color clip

Z5020

Attach to enable Bluetooth® wireless technology



CAT IV 600 V

Soil, residue, or moisture on the insulated wires may result in lower voltage and power values than their true values. Use a dry cloth to remove before measuring.

Measurement parameters	Detection functions	Phase detection, open phase, prediction of ground phase (three-phase line)
	Three-phase AC voltage (line-to-line voltage and voltage to ground)	90.0 V to 520.0 V AC (three-phase line) accuracy: $\pm 2.0\%$ rdg. ± 8 dgt.
Frequency	45 Hz to 66 Hz Accuracy: $\pm 0.5\%$ rdg. ± 1 dgt.	
Measurement targets	Covered cables, metal portions [†] Finished outer diameter 6 to 30 mm (0.24 to 1.18 in.)	
Operating temperature	-25°C to 65°C, 80% RH or less (non-condensating)	
Storage temperature	-25°C to 65°C, 80% RH or less (non-condensating)	
Dustproof and waterproof	IP54 (device body only)	
Standards	EN61010 (Safety), EN61326 Class A (EMC)	
Power supply	LR6 alkaline battery x4	
Continuous operating time	5 hours (without Z3210)	
Dimensions (W x H x D)	84 x 146 x 46 mm (3.31 x 5.75 x 1.81 in.) Cable length 50 cm (1.64 ft.)	
Weight	590 g (20.8 oz.)	

[†] Shielded cables not supported

PHASE DETECTOR PD3129, PD3129-10



Included accessories

- Carrying case
- Strap
- AA alkaline battery (LR6) x2
- Spiral tube
- Instruction manual

Order code **PD3129**

Order code **PD3129-10**



PD3129

CAT IV 600 V

PD3129-10

CAT IV 600 V, CAT III 1000 V

Measurement parameters	Detection functions	Phase detection (positive and negative)
	Voltage range	PD3129 70 to 600 V AC (continuous sine wave) PD3129-10 70 to 1000 V AC (continuous sine wave)
	Frequency range	45 Hz to 66 Hz
Measurement targets	PD3129 2.4 mm (0.09 in.) to 17 mm (0.67 in.) of insulated wiring PD3129-10 7 mm (0.28 in.) to 40 mm (1.57 in.) of insulated wiring	
Phase-detection indication	Positive 4 LEDs lit in clockwise order and the buzzer sounds intermittently, green arrow lights up Negative 4 LEDs lit in counterclockwise order and the buzzer sounds continuously	
Functions	Live line check, Battery check function	
Operating temperature	0°C to 40°C, 80% RH or less (non-condensating)	
Storage temperature	-20°C to 60°C, 80% RH or less (non-condensating)	
Standards	EN61010 (Safety), EN61326 (EMC)	
Power supply	AA alkaline battery (LR6) x 2	
Continuous operating time	Continuous use: 200 hr	
Dimensions (W x H x D)	70 x 75 x 30 mm (2.76 x 2.95 x 1.18 in.) Cable length 70 cm (2.30 ft.)	
Weight	PD3129: 200 g (7.1 oz.), PD3129-10: 240 g (8.5 oz.)	

VOLTAGE DETECTOR 3481-20



Order code **3481-20**



Product warranty for 3 years
Accuracy guaranteed for 1 year

Included accessories

- LR44 button alkaline battery x3
- Instruction manual

Measurement parameters	Operating voltage range	40 to 600 V AC (50/60Hz)
	Maximum sensitivity variable range	40 to 80 V AC (50/60Hz)
Pilot light		Red LED lights up and the buzzer sounds when the wire is live
Operating temperature	0°C to 40°C, 80% RH or less (non-condensating)	
Storage temperature	-20°C to 60°C, 80% RH or less (non-condensating)	
Standards	EN61010 (Safety), EN61326 (EMC)	
Power supply	LR44 button alkaline battery x 3	
Continuous operating time	5 hours	
Dimensions (W x H x D)	20 x 126 x 15 mm (0.79 x 4.96 x 0.59 in.)	
Weight	30 g (1.1 oz.)	



EARTH TESTER FT6041

Field-capable, Fast-working



Fast measurement!
Cord rewinding that doesn't tangle or twist



Insert just once thanks to 100 kΩ max. allowable resistance



Make measurements, even on concrete.
Newly designed Earth Nets Module L9846



Dirt, sand, and rain resistance
IP67 dust and water protection



Extreme cold, extreme heat. The FT6041 won't fail, even during extended operation.



Withstands being dropped onto concrete from a height of 1 m


EARTH TESTERS

Lineup

Model	FT6041	FT6031-50	FT3151	FT6380-50
Appearance				
Ground resistance	Two-pole method	✓	✓	✓
	Three-pole method	✓	✓	✓
	MEC function	✓	-	-
	2-clamp method	✓	-	-
Soil resistivity	Four-pole method	✓	-	-
Ground potential	0 to 30.0 V RMS	0 to 30.0 V RMS	0 to 30.0 V RMS	-
Measurement range (ground resistance)	3 Ω to 300 kΩ	20 Ω to 2000 Ω	10 Ω to 1000 Ω	0.20 Ω to 1600 Ω
Measuring frequency	94, 105, 111, 128, 55 Hz	128 Hz	575, 600 Hz	2375 Hz
Allowable ground potential	30 V RMS (DC or sine wave)	25.0 V RMS (DC or sine wave)	10 V	3 V RMS (DC or sine wave)
Allowable resistance of auxiliary grounding electrode	Max. 100 kΩ	Max. 50 kΩ	Max. 5 kΩ	-
Cord winders	✓	✓	✓	-
Operating temperature	-25°C to 65°C (-13°F to 149°F)	-25°C to 65°C (-13°F to 149°F)	0°C to 40°C (32°F to 104°F)	-10°C to 50°C (14°F to 122°F)
Dustproof and waterproof	IP67	IP67	IP40	IP40 with jaws closed
Drop-proof	1 m above concrete (with protector attached)	1 m above concrete (with protector attached)	-	-
Support for Gennect Cross (storage of measured values)	✓	✓	-	✓
Clamp measurement method (maximum measurable conductor diameter)	✓ (with optional sensor) Φ 52 mm (2.05 in.) 78 mm (3.07 in.) × 20 mm (0.79 in.) busbar	-	-	✓ Φ 32 mm (1.26 in.)




EARTH TESTER FT6041 Extensive Measurement Functionality



4-pole method


Measure soil resistivity when surveying a grounding design



MEC function


MEC stands for "measuring earth with a clamp."

Measure ground resistance without disconnecting ground electrodes




2-clamp method

Measure grounding resistance at multiple grounds



3-pole method

Precisely measure ground resistance



3-pole method using 4-terminal measurement

Measure ground resistance values of several ohms or less



Low-resistance measurement

Continuity test after ground resistance measurement

Clamp
Insulation
DMMS
Detectors
Earth
Power quality
Power loggers
Battery
PV
Logger
LAN
Lux
Temperature
Resistance

EARTH TESTER FT6041

Product warranty for 3 years
Accuracy guaranteed for 1 year 

Extensive measurement functionality

Dustproof and waterproof: IP67

4-pole method
Wenner's 4-pole method

3-pole method

2-pole method

Low-resistance measurement

2-clamp method
for multi grounded systems

MEC function

CAT IV 100 V
CAT III 150 V
CAT II 300 V

With Z3210

Please see www.hioki.com for list of supported regions.

Z3210

Order code **FT6041**Order code **FT6041-91**Order code **Z3210**FT6041-91: FT6041 and included accessories,
also includes clamps FT9847 and CT9848

Basic specifications

Measurement parameters	• Ground resistance measurement: 4-pole method, 3-pole method, 2-pole method, MEC function, clamp-on measurement (two clamps) • Soil resistivity measurement: 4-pole method • Low-resistance measurement: 4-terminal method, 2-terminal method • Ground potential measurement
Ground potential	0 to 30.0 V RMS, accuracy: $\pm 2.3\%$ rdg. ± 8 dgt. (50/60 Hz), $\pm 1.3\%$ rdg. ± 4 dgt. (DC)
Functions	Live wire warning, auto power save, soil resistivity display (4-pole method only), zero-adjustment, auto-hold, continuous measurement mode, wireless communication (only when Z3210 is connected), buzzer sound, comparator, switching the display, ground potential overload display (when measuring ground resistance)
Operating temperature and humidity	-25°C to 65°C ¹ (non-condensing)
Storage temperature and humidity	-25°C to 65°C: 80% RH or less (non-condensing)
Dustproof and waterproof	IP65/IP67 (EN60529)
Applicable standards	EN 61010 (safety), EN 61326 (EMC), EN 61557-1/EN61557-10/EN61557-14 (low-resistance measurement, earth testers), EN61557-5 (earth testers)
Power supply	HR6 nickel-metal hydride battery x 4 or LR03 alkaline battery x 4
Number of measurements per battery charge ²	500 times (3-pole method, without Z3210 installed) 400 times (3-pole method, with Z3210 installed and using wireless communication)
Dimensions and mass	189 mm (7.44 in.) W x 148 mm (5.83 in.) H x 48 mm (1.89 in.) D, approx. 765 g (27.98 oz.) (including battery, protector)

Ground resistance measurement: 4-pole method, 3-pole method, 2-pole method

Measurement principle Apply voltage and measure voltage and current (measures effective resistance by synchronous detection)

Ground resistance range	3 Ω (0 to 3.000 Ω)	30 Ω (0 to 30.0 Ω)	300 Ω (30.0 Ω to 300.0 Ω)	3000 Ω (300 Ω to 3000 Ω)	30.0 kΩ (3.00 kΩ to 30.00 kΩ)	300.0 kΩ (30.0 kΩ to 300.0 kΩ)
Accuracy	-	$\pm 1.5\%$ rdg. ± 6 dgt.			$\pm 1.5\%$ rdg. ± 4 dgt.	

Allowable resistance of auxiliary grounding electrode 5 kΩ 50 kΩ 100 kΩ

Allowable ground potential 30 V RMS or 42.4 V peak

MEC function: 4-pole method with clamp sensor, 3-pole method with clamp sensor

Measurement principle Apply voltage and measure voltage and current (measures effective resistance by synchronous detection)

Ground resistance range	30 Ω (0.00 to 30.00 Ω)	300 Ω (30.0 Ω to 300.0 Ω)	3000 Ω (300 Ω to 3000 Ω)	30.00 kΩ (3 kΩ to 30.00 kΩ)
Accuracy	$\pm 5\%$ rdg. ± 6 dgt.		$\pm 5\%$ rdg. ± 3 dgt.	

Ground resistance measurement: 2-clamp method

Measurement principle Apply voltage and measure voltage and current (measures effective resistance by synchronous detection)

Ground resistance range	20 Ω (0.02 Ω to 20.00 Ω)	200 Ω (20.0 Ω to 200.0 Ω)	500 Ω (200 Ω to 500 Ω)
Accuracy	$\pm 7\%$ rdg. ± 3 dgt.		$\pm 35\%$ rdg.

Low-resistance measurement

Open-circuit voltage 4.0 V to 6.9 V

Measuring current	200 mA or more
Measurement range	30 Ω (0.00 to 30.00 Ω)

Accuracy ± 3 dgt. (0.00 to 0.19 Ω) $\pm 2\%$ rdg. ± 2 dgt. (0.20 Ω to 10.00 Ω) $\pm 2\%$ rdg. ± 2 dgt.¹ -25°C to 40°C, -13°F to 104°F (80% RH or less), 40°C to 45°C, 104°F to 113°F (60% RH or less), 45°C to 50°C, 113°F to 122°F (50% RH or less), 50°C to 55°C, 122°F to 131°F (40% RH or less), 55°C to 60°C, 131°F to 140°F (30% RH or less), 60°C to 65°C, 140°F to 149°F (25% RH or less)² NiMH battery x 4 (reference value at 23°C)

Cord winders make cleanup a snap




Sturdy, thin rods drive easier into the ground



Make measurements, even on concrete.

Included accessories


1	AUXILIARY EARTHING ROD L9840	2 piece set, 270 mm (10.63 in.), Stainless steel
2	MEASUREMENT CABLE L9845-31	Yellow, 25 m (82.02 ft.), equipped with winder
3	MEASUREMENT CABLE L9845-33	Blue, 25 m (82.02 ft.), equipped with winder
4	MEASUREMENT CABLE L9845-52	Red, 50 m (164.04 ft.), equipped with winder
5	MEASUREMENT CABLE L9841	Black 4 m (13.12 ft.) length
6	TEST LEAD L9787	Bundled with line/ground lead, alligator clip, 1.2 m (3.94 ft.) long
7	EARTH NETS MODULE L9846	2 pcs, use with measuring cord set, built-in grounding/earth nets
8	CARRYING CASE C0208	For storing FT6041 and clamp sensors, hard type
9	CARRYING CASE C0209	For storing measurement cables, soft type
10	Protector	Attaches to and protect FT6041
11	LR6 alkaline battery	4 pcs
12	Instruction manual, Operating precautions	

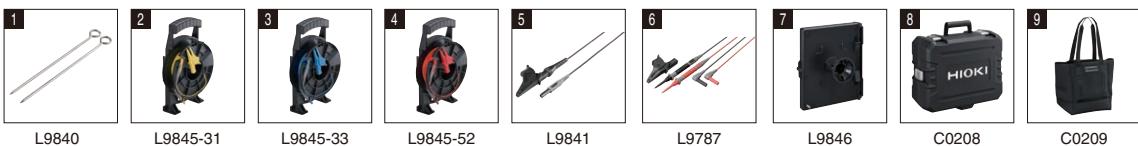

Protector
(attaches to FT6041)

Options

1	SIGNAL INDUCTION CLAMP FT9847	For signal induction, Including resistance check loop
2	CLAMP ON SENSOR CT9848	For detection
3	WIRELESS ADAPTER Z3210	Bluetooth® communication will be possible by attaching to the FT6041
4	MEASUREMENT CABLE L9842-11	Yellow 10 m (32.81 ft.) long, equipped with winder
5	MEASUREMENT CABLE L9842-22	Red 20 m (65.62 ft.) long, equipped with winder
6	MEASUREMENT CABLE L9843-51	Yellow 50 m (164.04 ft.) long, equipped with flat cable winder
7	MEASUREMENT CABLE L9843-52	Red 50 m (164.04 ft.) long, equipped with flat cable winder
8	MEASUREMENT CABLE L9844	For grounding terminal board, red/yellow/black, each 1.2 m (3.94 ft.) long
9	PIN TYPE LEAD 9772	For low-resistance measurement by 4-terminal method
10	LARGE CLIP TYPE LEAD 9467	For low-resistance measurement by 4-terminal method
11	EARTH NETS 9050	2 sheets in set
12	FUSE SET Z5052	

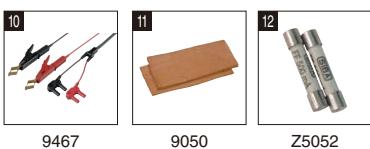

9467

9050

Z5052

EARTH TESTER FT6031-50

Product warranty for 3 years
Accuracy guaranteed for 1 year 

Dustproof and waterproof: IP67

2-pole
method
Class D3-pole
method
Class A to Class DCAT IV 100 V
CAT III 150 V
CAT II 300 V

With Z3210

Bluetooth®

Please see www.hioki.com
for list of supported regions.

Z3210

Order code **FT6031-50**Order code **FT6031-90**Order code **Z3210**

Basic specifications

Measurement system	Two-pole method or three-pole method	
Measurement range	20 Ω (0 to 20.00 Ω)	200 Ω (0 to 200.0 Ω)
Accuracy	±1.5% rdg. ±8 dgt.	±1.5% rdg. ±4 dgt.
Ground potential	0 to 30.0 V RMS Accuracy: ±2.3% rdg. ±8 dgt. (50/60 Hz), ±1.3% rdg. ±4 dgt. (DC)	
Allowable ground potential	25.0 V RMS (DC or sine wave)	
Operating temperature and humidity	-25°C to 65°C ¹ (non-condensing)	
Storage temperature and humidity	-25°C to 65°C (-13°F to 149°F): 80% RH or less (non-condensing)	
Dustproof and waterproof	IP65/IP67 (EN60529)	
Applicable standards	Safety: EN 61010 (main unit), EN 61010 (measuring circuit); EMC: EN 61326; earth testers: EN 61557	
Power supply	LR6 alkaline battery ×4, possible number of measurements for one set of batteries: 500 times (measurement conditions: three-pole method, measuring 10 Ω at 10-second intervals without Z3210 installed)	
Dimensions and mass	185 mm (7.28 in.) W × 111 mm (4.37 in.) H × 44 mm (1.73 in.) D, 570 g (20.1 oz.) (including batteries and protector, excluding terminal covers and other accessories)	

¹ -25°C to 40°C, -13°F to 104°F (80% RH or less), 40°C to 45°C, 104°F to 113°F (60% RH or less), 45°C to 50°C, 113°F to 122°F (50% RH or less), 50°C to 55°C, 122°F to 131°F (40% RH or less), 55°C to 60°C, 131°F to 140°F (30% RH or less), 60°C to 65°C, 140°F to 149°F (25% RH or less)




Cord winders make cleanup a snap

Sturdy, thin rods drive easier into the ground

Included accessories

1	AUXILIARY EARTHING ROD L9840	2 piece set, 270 mm (10.63 in.), Stainless steel
2	MEASUREMENT CABLE L9842-11	Yellow 10 m (32.81 ft.) length, equipped with winder
3	MEASUREMENT CABLE L9842-22	Red 20 m (65.62 ft.) length, equipped with winder
4	MEASUREMENT CABLE L9841	Black 4 m (13.12 ft.) length
5	CARRYING CASE C0106	Soft type, includes compartment for options
6	LR6 alkaline battery	6 pcs
7	Instruction manual	



L9840




L9842-11



L9842-22



L9841



C0106

Options

1	MEASUREMENT CABLE L9843-51	50 m (164.04 ft.)
2	MEASUREMENT CABLE L9843-52	50 m (164.04 ft.)
3	MEASUREMENT CABLE L9844	For earthing terminal board red/yellow/black 1.2 m (3.94 ft.) each
4	TEST LEAD L9787	For simplified measurement method
5	WIRELESS ADAPTER Z3210	Bluetooth® communication will be possible by attaching to the FT6031-50
6	EARTH NETS 9050	2 sheets in set



L9843-51



L9843-52



L9844



L9787




Z3210




9050

Ground types

Type	Criterion	Locations used
Class A	10 Ω or less	Special high voltage, high voltage
Class B	As per calculations	Transformer neutral point
Class C	10 Ω or less* 500 Ω or less*	Low voltages in excess of 300 V
Class D	10 Ω or less* 500 Ω or less*	Low voltages of 300 V or less

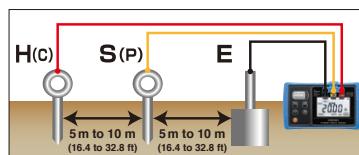3 electrode method
(classes A to D)

Measurement is performed after inserting an auxiliary grounding rod into the soil. For accurate measurement, position E-S(P)-H(C) in a straight line at an interval of about 5 to 10 m.

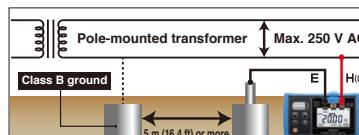2 electrode method
(classes D)

Class D ground installations can be measured by using the Class B ground of a pole-mounted transformer. The measured value will include the resistance value of the Class B ground. The distribution panel's main ground terminal is typically connected to the power supply's ground line.

*With ground-fault interrupter that trips within 0.5 sec.

EARTH TESTER FT3151

 Product warranty for 3 years
Accuracy guaranteed for 1 year


Rewind with ease

 2-pole
method
Class D

 3-pole
method
Class A to Class D

CAT II 300 V

 Order code **FT3151**

Basic specifications

Measurement parameters	Measurement system	
	Two-electrode method (Class D)	Three-electrode method (Class A to D)
Range configuration	10 Ω (0 to 11.5 Ω): ±0.25 Ω	
Accuracy	100 Ω (0 to 115 Ω): ±2.5 Ω	
	1000 Ω (0 to 1150 Ω): ±25 Ω	
Earth potential: Accuracy	0 to 30 V: ±3.0% f.s.	
Operating temperature	0°C to 40°C, 80% RH or less (non-condensating)	
Storage temperature	-10°C to 50°C, 80% RH or less (non-condensating)	
Dustproof and waterproof	IP40 (EN60529)	
Other	EN61010 (Safety, measuring circuit, probe), EN61326 (EMC), EN61557-1/5 (Earth tester)	
Power supply	LR6 alkaline battery × 6	
Number of uses	1100 times ¹	
Dimensions (W × H × D)	164 × 119 × 88 mm (6.46 × 4.69 × 3.46 in.)	
Weight	760 g (26.8 oz.)	

¹30 sec. measurement and 30 sec. rest, 3-electrode method, 575 Hz, auxiliary grounding electrode resistance of 100 Ω, measuring 10 Ω in the instrument's × 1 Ω range


Cord winders make cleanup a snap



Sturdy, thin rods drive easier into the ground

Included accessories

1		2		3		4		5	
6								6	pieces
7								Instruction manual	

Options

1		50 m (164.04 ft.)
2		50 m (164.04 ft.)
3		For earthing terminal board red/yellow/black 1.2 m (3.94 ft.) each
4		For simplified measurement method
5		Z5022
6		2 sheets in set

1		L9843-51	2		L9843-52	3		L9844	4		L9787	5		Z5022	6		9050
---	--	----------	---	--	----------	---	--	-------	---	--	-------	---	--	-------	---	--	------

CLAMP ON EARTH TESTER FT6380-50

 Product warranty for 3 years
Accuracy guaranteed for 1 year


For multi-grounded systems only

 Clamp-on
method

 Current
measurement
True RMS

CAT IV 600 V

WIRELESS ADAPTER Z3210 (option): Attach to enable Bluetooth® wireless technology

Model FT6380-90 includes Z3210 as a set

With Z3210

Bluetooth®

 Please see www.hioki.com for list of supported regions.


Z3210

 Order code **FT6380-50**

 Order code **FT6380-90**

 Order code **Z3210**

Included accessories



Carrying case Resistance check loop

- Carrying case
- Resistance check loop (1 Ω, 25 Ω)
- Strap
- LR06 alkaline battery × 2
- Instruction manual

Measurements for Multi-Grounded Systems



Hazardous Storage Tanks



Transmission Towers

Measurement parameters	Measurement system	
	Earthing resistance range	Instrument has two cores for voltage injection and current measurement. Total circuit loop resistance is calculated from defined voltage and measured current. ¹
Earthing resistance range	0.20 Ω, 2.00 Ω, 20.00 Ω, 50.0 Ω, 100.0 Ω, 200.0 Ω, 400.0 Ω, 600.0 Ω, 1200 Ω, 1600 Ω	Guaranteed accuracy range: 0.02 Ω to 1600 Ω Accuracy: ±1.5% rdg. ±0.02 Ω
AC Current range	20.00 mA, 200.0 mA, 2,000 A, 20.00 A, 60.0 A	Guaranteed accuracy range: 1.00 mA to 60.0 A Accuracy: ±2.0% rdg. ±0.05 mA
Operating temperature	-10°C to 50°C, 80% RH or less (non-condensating)	
Storage temperature	-20°C to 60°C, 80% RH or less (non-condensating)	
Dustproof and waterproof	IP40 (EN60529) ²	
Other	EN61010 (Safety), EN61326 (EMC)	
Power supply	LR6 alkaline battery × 2	
Continuous operating time	35 hours (backlight OFF)	
Dimensions (W × H × D)	73 × 218 × 43 mm (2.87 × 8.58 × 1.69 in.)	
Weight	620 g (21.9 oz.)	

¹ For multi-grounded systems only. In a multi-grounded system, the larger the number of grounding poles, the more accurate the measured value.

² When jaw closes



POWER QUALITY ANALYZER PQ3198, PQ3100


Monitor Power Quality and Analyze the Cause of Equipment Issues



Power anomalies are a major cause of equipment malfunction and damage. The PQ3198 and PQ3100 detect power supply abnormalities without fail to help diagnose the cause of problems.

Capture all of these power anomalies simultaneously

- Transient voltages
- Voltage swells
- Voltage dips
- Interruptions
- Frequency fluctuations
- Inrush current
- Harmonics
- High-order harmonics (Supraharmonics)

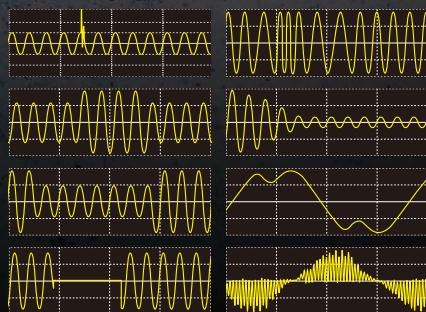

POWER QUALITY ANALYZERS




Product warranty for 3 years
Accuracy guaranteed for 1 year

POWER QUALITY ANALYZER PQ3198, PQ3100

Shared features: Side

Left side Right side

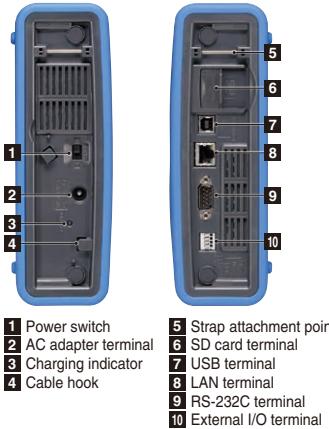

- 1 Power switch
- 2 AC adapter terminal
- 3 Charging indicator
- 4 Cable hook

- 5 Strap attachment point
- 6 SD card terminal
- 7 USB terminal
- 8 LAN terminal
- 9 RS-232C terminal
- 10 External I/O terminal



PQ3198 (High-end model)



CAT IV 600 V



PQ3100 (Standard model)



CAT IV 600 V, CAT III 1000 V

Model	PQ3198 (High-end model)	PQ3100 (Standard model)
Measurement lines	1-phase/2-wire, 1-phase/3-wire, 3-phase/3-wire, 3-phase/4-wire + CH 4	
Fundamental frequency	DC, 50 Hz, 60 Hz, 400 Hz	DC, 50 Hz, 60 Hz
Voltage ranges Accuracy	Voltage measurement: 600.00 V rms Transient measurement: 6.0000 kV peak ±0.1% of nominal voltage	Voltage measurement: 1000.0 V rms or DC Transient measurement: 2.200 kV peak ±0.2% of nominal voltage
Current ranges Accuracy	500.00 mA to 5.0000 kA AC (Depends on current sensor in use) ±0.1% rdg. ±0.1% f.s. + current sensor accuracy	(AC) 50.000 mA to 5.0000 kA (Depends on current sensor in use) (DC) 10.000 A to 2.0000 kA (Depends on current sensor in use) ±0.1% rdg. ±0.1% f.s.+ current sensor accuracy
Power ranges Accuracy	300.00 W to 3.0000 MW (AC) ±0.2% rdg. ±0.1% f.s. + current sensor accuracy (DC) ±0.5% rdg. ±0.5% f.s.+ current sensor accuracy (CH4 Only)	50.000 W to 6.0000 MW (AC) ±0.2% rdg. ±0.1% f.s.+ current sensor accuracy (DC) ±0.5% rdg. ±0.5% f.s.+ current sensor accuracy
Measurement parameters	1. Transient voltage: 2MHz sampling 2. Frequency cycle: calculated as one cycle 3. Voltage (1/2) RMS: one cycle calculation refreshed every half cycle Current (1/2) RMS: half-cycle calculation 4. Voltage swell, voltage dips, voltage interruption 5. Inrush current 6. Voltage waveform comparison 7. Instantaneous flicker value: As per IEC61000-4-15 8. 200 ms frequency: calculated as 10 or 12 cycles, 40 to 70 Hz 9. 10 sec frequency: calculated as the whole-cycle time during the specified 10 s period, 40 to 70 Hz 10. Voltage waveform peak, Current waveform peak 11. Voltage, current, active power, apparent power, reactive power, active energy, reactive energy, power factor, displacement power factor, voltage unbalance factor, current unbalance factor, and efficiency 12. High-order harmonic (Supraharmonic) component (voltage/current): 2 kHz to 80 kHz 13. Harmonic value and Harmonic phase angle (voltage/current), harmonic power: 0th to 50th orders 14. Harmonic voltage-current phase angle: 1st to 50th orders 15. Total harmonic distortion factor (voltage/current) 16. Inter harmonic (voltage/current): 0.5th to 49.5th order 17. K Factor (multiplication factor) 18. IEC Flicker, Δ V10 Flicker	1. Transient voltage: 200 kHz sampling 2. Frequency cycle: calculated as one cycle 3. Voltage (1/2) RMS and Current (1/2) RMS: one cycle calculation refreshed every half cycle 4. Voltage swell, voltage dips, voltage interruption, RVC: Voltage (1/2) RMS calculation 5. Inrush current 6. Frequency 200 ms: calculated as 10 or 12 cycles 7. 10-sec frequency: calculated as the whole-cycle time during the specified 10 s period 8. Voltage waveform peak, current waveform peak 9. Voltage, current, active power, apparent power, reactive power, active energy, apparent energy, reactive energy, energy cost, power factor, displacement power factor, voltage unbalance factor, current unbalance factor 10. Voltage crest factor, current crest factor 11. Harmonic/Harmonics phase angle (voltage/current), harmonic power: 0th to 50th orders 12. Harmonic voltage-current phase angle: 1st to 50th orders 13. Total harmonic distortion factor (voltage/current) 14. Inter harmonic (voltage/current): 0.5th to 49.5th orders 15. K Factor (multiplication factor) 16. IEC Flicker, Δ V10 Flicker
Measurement items	Repeated ON: 1 year, maximum recording event: 9999 × 366 days (up to 9999 events per day) Repeated off: 35 days, maximum recording event: 9999 events	Maximum recording interval: 1 year, maximum number of recordable events: 9999 × 365 days
Record		QUICK SET (navigation-style assistance from connecting the instrument to the start of recording)
Setup assistance	Simplified setup function	
Interfaces	SD/SDHC memory card (Use only SD cards sold by HIOKI. Compatibility and performance are not guaranteed for SD cards made by other manufacturers.), RS-232C, USB2.0, LAN	
Operating temperature	0°C to 30°C (95% RH or less), 30°C to 50°C (80% RH or less) (non-condensating)	-20°C to 50°C (80% RH or less) (non-condensating)
Storage temperature	10°C greater than operating temperature and humidity range	
Standards	EN61010 (Safety), EN61326 Class A (EMC)	
IEC 61000-4-30	Class A	Class S
Power supply	AC ADAPTER Z1002, BATTERY PACK Z1003	
Battery operating time	3 hours	8 hours
Dimensions (W × H × D)	300 × 211 × 68 mm (11.81 × 8.31 × 2.68 in.)	
Weight	2.6 kg (9.17 oz.) (including BATTERY PACK)	2.5 kg (8.82 oz.) (including BATTERY PACK)



PQ3198 Included accessories

- VOLTAGE CORD L1000
- AC ADAPTER Z1002
- BATTERY PACK Z1003
- SD MEMORY CARD Z4001
- USB cable
- Color clips
- Spiral tubes
- Strap
- Measurement guide
- User manual

Order code **PQ3198**

Order code **PQ3198-92** Value Kits: PQ3198, CT7136 (600A) × 4, L1021-02×3, CARRYING CASE C1009

Order code **PQ3198-94** Value Kits: PQ3198, CT7045 (6000A) × 4, L1021-02×3, CARRYING CASE C1009

Order code **PQ3100**

Order code **PQ3100-91** Value Kits: PQ3100, CT7136 (600A) × 2, SD MEMORY CARD 2GB Z4001, CARRYING CASE C1009

Order code **PQ3100-92** Value Kits: PQ3100, CT7136 (600A) × 4, SD MEMORY CARD 2GB Z4001, CARRYING CASE C1009

Order code **PQ3100-94** Value Kits: PQ3100, CT7045 (6000A) × 4, SD MEMORY CARD 2GB Z4001, CARRYING CASE C1009

*For more detailed information on CT7136, CT7045, and options, please refer to p.48.

Clamp	
Insulation	
DMMS	
Detectors	
Earth	
Power quality	
Power loggers	
Battery	
PV	
Logger	
LAN	
Lux	
Temperature	
Resistance	



CLAMP ON POWER LOGGER PW3365, PW3360

Accurately Measure Power Consumption, also Available with Non-contact Voltage Sensor for Added Safety

SAFETY VOLTAGE SENSOR PW9020 (for PW3365 only)

- Clamp on top of cable insulation
- Quick setup
- Safely avoid contact/with live parts



Compared with standard alligator clips that are hard to use and require metal-to-metal contact



Toggle displays to easily verify data



List display



Demand Graph



Waveform



Trend Graph

QUICK SET navigation



Highly Intuitive



Check Connection Status

POWER LOGGERS



Product warranty for 3 years
Accuracy guaranteed for 1 year

CLAMP ON POWER LOGGER PW3365, PW3360



SAFETY VOLTAGE SENSOR PW9020
Compatible with PW3365 only

Finished outer diameter
Φ6 mm (0.24 in.) to Φ30 mm (1.18 in.)



PW3365
CAT IV 300 V, CAT III 600 V



PW3360
CAT IV 300 V, CAT III 600 V



Model	PW3365 + PW9020	PW3360
Measurement line	1-phase/2-wire (1/2/3 circuits), 1-phase/3-wire (1 circuit), 3-phase/3-wire (1 circuit), 3-phase/4-wire (1 circuit), Current only: 1 to 3 channels	
Frequency	50 Hz/60 Hz	
Voltage ranges Accuracy	400 V AC (Effective measurement range: 90.0 V to 520.0 V) ±1.5% rdg. ±0.2% f.s. (combined accuracy with PW9020)	600 V AC (Effective measurement range: 90.0 V to 780.0 V) ±0.3% rdg. ±0.1% f.s.
Current ranges Accuracy	500.00 mA AC to 5.0000 kA ¹ (Leak clamp on sensor only: 50.000 mA AC to 5.0000 A) ±0.3% rdg. ±0.1% f.s. + current sensor accuracy	
Power ranges Accuracy	200.00 W to 6.0000 MW ±2.0% rdg. ±0.3% f.s. + current sensor accuracy	300.00 W to 9.0000 MW ±0.3% rdg. ±0.1% f.s. + current sensor accuracy
Measurement parameters	Voltage	RMS value, fundamental wave value, waveform peak (absolute value), fundamental wave phase angle, frequency (U1)
	Current	RMS value, fundamental wave value, waveform peak (absolute value), fundamental wave phase angle
	Power	Active power, reactive power, apparent power, power factor, (with lag, lead display) or displacement power factor (with lag, lead display), active energy (consumption, regeneration), reactive energy (lag, lead) Energy cost display (per-kWh price × power consumption)
	Demand	Active power demand value (consumption, regeneration), reactive power demand value (lag, lead), Active power demand quantity (consumption, regeneration), reactive power demand quantity (lag, lead), power factor demand value
	Harmonics	Harmonic voltage, harmonic current, voltage total harmonic distortion (THD-F or THD-R), current total harmonic distortion (THD-F or THD-R), up to the 13th order
	Pulse input	N / A
Other	Data save interval	1 sec to 30 sec, 1 minute to 60 minutes, 14 selections
	Interfaces	SD/ SDHC memory card ² , LAN, USB2.0, FTP
	Operating temperature	0°C to 50°C, 80% RH or less (non-condensating)
	Storage temperature	-10°C to 60°C, 80% RH or less (non-condensating)
	Standards	EN61010 (Safety), EN61326 (EMC)
	Power supply	AC ADAPTER Z1008, BATTERY PACK 9459
	Battery operating time	3 hours
	Dimensions (W × H × D)	180 × 100 × 68 mm (7.09 × 3.94 × 2.68 in.) (with PW9002)
	Weight	820 g (28.9 oz.) (with PW9002)
		180 × 100 × 67.2 mm (7.09 × 3.94 × 2.65 in.) (with PW9002)
		830 g (29.3 oz.) (with PW9002)

SAFETY VOLTAGE SENSOR PW9020 Specifications

Compatible conductor types	Insulated wires ³ (indoor PVC) or metal parts
Compatible conductor diameters	Finished outer diameter Φ6 mm to Φ30 mm (Φ0.24 in. to Φ1.18 in.)
Effective measurement range	90 V to 520 V
Safety standard category	CAT IV 300 V/CAT III 600 V
Operating temperature	0°C to 50°C, 80% RH or less (non-condensating)
Storage temperature	-10°C to 60°C, 80% RH or less (non-condensating)
Standards	EN61010 (Safety), EN61326 (EMC)
Cord length	3 m (9.84 ft.)
Weight	220 g (7.8 oz.)

¹ Depends on current sensor in use. For more detailed information on sensors, please refer to p.49.

² Use only SD Cards sold by HIOKI. Compatibility and performance are not guaranteed for PC cards made by other manufacturers.

³ Shielded wires cannot be measured. The product may not be able to accurately measure multicore cables or cables that have thick insulation.



PW3360 Included accessories

- VOLTAGE CORD L9438-53 (black, red, yellow, blue @ 1 each)
- AC ADAPTER Z1006
- USB cable 0.9 m (2.95 ft.)
- Instruction manual, Measurement guide
- Color clips (red, blue, yellow, white @ 2 each)
- Spiral tubes × 5

PW3365 Included accessories

- SAFETY VOLTAGE SENSOR PW9020 ×4
- AC ADAPTER Z1008
- USB cable 0.9 m (2.95 ft.)
- Instruction manual, Measurement guide
- Color clips (red, blue, yellow, white @ 4 each)
- Spiral tubes × 10

Order code **PW3365-20**

Order code **PW3360-20**

Order code **PW3360-21** with harmonic analysis function

Clamp

Insulation
DMMS

Detectors
Earth

Power
quality

Power
loggers

Battery

PV

Logger

LAN

Lux

Temperature

Resistance

Options

For PQ3198, PQ3100

Voltage	1 VOLTAGE CORD L1000	Red/Yellow/Blue/Gray @ 1 each, Black x 4, 3 m (9.84 ft.), Alligator clip x 8
	2 VOLTAGE CORD L1000-05	Red/Yellow/Blue/Gray/Black @ 1 each, 3 m (9.84 ft.), Alligator clip x 5
	3 MAGNETIC ADAPTER 9804-01	Red, Alternative tip for the L1000, L1000-05
	4 MAGNETIC ADAPTER 9804-02	Black, Alternative tip for the L1000, L1000-05
	5 GRABBER CLIP L9243	Alternative tip for the L1000, L1000-05
	6 PATCH CORD L1021-01*	0.5 m (1.64 ft.), Red, Banana branch-banana
	7 PATCH CORD L1021-02*	0.5 m (1.64 ft.), Black, Banana branch-banana
Record	8 SD MEMORY CARD 2GB Z4001	Use only SD Cards sold by HIOKI. Compatibility and performance are not guaranteed for PC cards made by other manufacturers.
	9 SD MEMORY CARD 8GB Z4003	
Communication	10 RS-232C CABLE 9637	For PQ3100, pin - 9 pin, cross, 1.8 m (5.91 ft.)
	11 LAN CABLE 9642	5 m (16.4 ft.), Straight, Cross conversion adapter
Power supply	12 AC ADAPTER Z1002	100 V AC to 240 V AC
	13 BATTERY PACK Z1003	7.2 V, Ni-MH
Connection	14 WIRING ADAPTER PW9000	For PQ3198, for 3-phase/3-wire connection
	15 WIRING ADAPTER PW9001	For PQ3198, for 3-phase/4-wire connection
	16 GPS BOX PW9005	For PQ3198
Other	17 CARRYING CASE C1009	Bag type
	18 CARRYING CASE C1002	Hard trunk type
	19 MAGNETIC STRAP Z5004	
	20 MAGNETIC STRAP Z5020	Extra strength



* Only for PQ3198



Product warranty for 3 years
Accuracy guaranteed for 1 year

CURRENT SENSOR for PQ3198, PQ3100

Features	AC/DC AUTO-ZERO CURRENT SENSOR			AC/DC current sensors for observing instantaneous waveforms		
Model name	CT7731	CT7736	CT7742	CT7631	CT7636	CT7642
Appearance						
Rated measurement current	100 A AC/DC	600 A AC/DC	2000 A AC/DC	100 A AC/DC	600 A AC/DC	2000 A AC/DC
Max. allowable peak input	150 A peak	900 A peak	2840 A peak	150 A peak	900 A peak	2840 A peak
Bandwidth	DC to 5 kHz (-3dB)	DC to 5 kHz (-3dB)	DC to 5 kHz (-3dB)	DC to 10 kHz (-3dB)	DC to 10 kHz (-3dB)	DC to 10 kHz (-3dB)
Amplitude accuracy (DC, 45 to 66 Hz)	±1.0% rdg. ±0.5% f.s.	±2.0% rdg. ±0.5% f.s.	±1.5% rdg. ±0.5% f.s.	±1.0% rdg. ±0.5% f.s.	±2.0% rdg. ±0.5% f.s.	±1.5% rdg. ±0.5% f.s.
Output rate	1 mV/A	1 mV/A	0.1 mV/A	1 mV/A	1 mV/A	0.1 mV/A
Max. rated voltage to earth	(AC/DC) CAT IV 600 V	(AC/DC) CAT IV 600 V, CAT III 1000 V	(AC/DC) CAT IV 600 V, CAT III 1000 V	(AC/DC) CAT IV 600 V	(AC/DC) CAT IV 600 V, CAT III 1000 V	(AC/DC) CAT IV 600 V, CAT III 1000 V
Operating temperature	-25°C to 65°C	-25°C to 65°C	-25°C to 65°C	-25°C to 65°C	-25°C to 65°C	-25°C to 65°C
Core jaw diameter	Φ33 mm or less	Φ33 mm or less	Φ55 mm or less	Φ33 mm or less	Φ33 mm or less	Φ55 mm or less

Features	Attaches easily to thick cables, even in confined spaces			For accurately measuring load current			For measuring leakage current
Model name	AC FLEXIBLE CURRENT SENSOR			AC CURRENT SENSOR			AC LEAKAGE CURRENT SENSOR
Model	CT7044	CT7045	CT7046	CT7126	CT7131	CT7136	CT7116
Appearance							
Rated measurement current	6000 A AC	6000 A AC	6000 A AC	60 A AC	100 A AC	600 A AC	6 A AC
Max. allowable peak input	15000 A peak	15000 A peak	15000 A peak	100 A peak	200 A peak	900 A peak	30 A peak
Bandwidth	10 to 50 kHz (within ±3 dB)	10 to 50 kHz (within ±3 dB)	10 to 50 kHz (within ±3 dB)	40 to 20 kHz	40 to 20 kHz	40 to 20 kHz	40 to 5 kHz
Amplitude accuracy (45 to 66 Hz)	±1.5% rdg. ±0.25% f.s.*	±1.5% rdg. ±0.25% f.s.*	±1.5% rdg. ±0.25% f.s.*	±0.3% rdg. ±0.01% f.s.	±0.3% rdg. ±0.02% f.s.	±0.3% rdg. ±0.01% f.s.	±1.0% rdg. ±0.05% f.s.
Output rate	1 mV/A (600 A) 0.1 mV/A (6000 A)	1 mV/A (600 A) 0.1 mV/A (6000 A)	1 mV/A (600 A) 0.1 mV/A (6000 A)	10 mV/A	1 mV/A	1 mV/A	100 mV/A
Max. rated voltage to earth	(AC) CAT IV 600 V, CAT III 1000 V	(AC) CAT IV 600 V, CAT III 1000 V	(AC) CAT IV 600 V, CAT III 1000 V	(AC) CAT III 300 V	(AC) CAT III 300 V	(AC) CAT IV 600 V, CAT III 1000 V	Insulated conductor
Operating temperature	-25°C to 65°C	-25°C to 65°C	-25°C to 65°C	-10°C to 50°C	-10°C to 50°C	-10°C to 50°C	-25°C to 65°C
Core jaw diameter	Φ100 mm or less	Φ180 mm or less	Φ254 mm or less	Φ15 mm or less	Φ46 mm or less	Φ40 mm or less	

*At center of flexible loop

1 EXTENSION CABLE L0220-01	2 m (6.56 ft.), for PL14 connectors
2 EXTENSION CABLE L0220-02	5 m (16.4 ft.), for PL14 connectors
3 EXTENSION CABLE L0220-03	10 m (32.81 ft.), for PL14 connectors
4 EXTENSION CABLE L0220-04	20 m (65.62 ft.), for PL14 connectors
5 EXTENSION CABLE L0220-05	30 m (98.43 ft.), for PL14 connectors
6 EXTENSION CABLE L0220-06	50 m (164.04 ft.), for PL14 connectors
7 EXTENSION CABLE L0220-07	100 m (328.08 ft.), for PL14 connectors



L0220

Options

For PW3365, PW3360	
1	SAFETY VOLTAGE SENSOR PW9020 For PW3365, 3 m (9.84 ft.)
2	VOLTAGE CORD L9438-53 For PW3360, Black/ Red/ Yellow/ Blue, 3 m (9.84 ft.) length, Alligator clip x 4
3	MAGNETIC ADAPTER 9804-01 For PW3360, Red, Φ 11 mm (0.43 in.)
4	MAGNETIC ADAPTER 9804-02 For PW3360, Black, Φ 11 mm (0.43 in.)
5	PATCH CORD L1021-01 For PW3360, 0.5 m (1.64 ft.), Red, Banana branch-banana
6	PATCH CORD L1021-02 For PW3360, 0.5 m (1.64 ft.), Black, Banana branch-banana
7	SD MEMORY CARD 2GB Z4001 Use only SD Cards sold by HIOKI. Compatibility and performance are not guaranteed for PC cards made by other manufacturers.
8	SD MEMORY CARD 8GB Z4003
9	LAN CABLE 9642 5 m (16.4 ft.), Straight, Cross conversion adapter
10	POWER LOGGER VIEWER SF1001 Software to analyze measurement data
11	AC ADAPTER Z1008 For PW3365, 100V AC to 240V
12	AC ADAPTER Z1006 For PW3360, 100V AC to 240V
13	BATTERY SET PW9002 Battery case and 9459 Set
14	BATTERY PACK 9459
15	CARRYING CASE C1005
16	CARRYING CASE C1008 For PW3365
17	MAGNETIC STRAP Z5004



Product warranty for 3 years
Accuracy guaranteed for 1 year

CURRENT SENSOR for PW3365, PW3360

Features	For load current levels: Voltage output					
Model name	CLAMP ON SENSOR					
Model	9694	9660	9661	9669	9695-02	9695-03
Appearance	BNC	BNC	BNC	BNC	Requires the 9219 Insulated conductor Not CE marked	Requires the 9219 Insulated conductor Not CE marked
Rated measurement current	5 A AC	100 A AC	500 A AC	1000 A AC	50 A AC	100 A AC
Output rate	10 mV/A	1 mV/A	1 mV/A	0.5 mV/A	10 mV/A	1 mV/A
Amplitude accuracy (45 to 66 Hz)	$\pm 0.3\%$ rdg. $\pm 0.02\%$ f.s.	$\pm 0.3\%$ rdg. $\pm 0.02\%$ f.s.	$\pm 0.3\%$ rdg. $\pm 0.01\%$ f.s.	$\pm 1.0\%$ rdg. $\pm 0.01\%$ f.s.	$\pm 0.3\%$ rdg. $\pm 0.02\%$ f.s.	$\pm 0.3\%$ rdg. $\pm 0.02\%$ f.s.
Max. rated voltage to earth	(AC) CAT III 300 V	(AC) CAT III 300 V	(AC) CAT III 600 V	(AC) CAT III 600 V	(AC) CAT III 300 V	(AC) CAT III 300 V
Operating temperature	0°C to 50°C	0°C to 50°C	0°C to 50°C	0°C to 50°C	0°C to 50°C	0°C to 50°C
Core jaw diameter	Φ 15 mm or less	Φ 15 mm or less	Φ 46 mm or less	Φ 55 mm or less 80x20 mm busbar	Φ 15 mm or less	Φ 15 mm or less

Features	For load current levels: Voltage output			For leak current: Voltage output	
Model name	AC FLEXIBLE CURRENT SENSOR			CLAMP ON LEAK SENSOR	
Model	CT9667-01	CT9667-02	CT9667-03	9657-10	9675
Appearance	BNC	BNC	BNC	BNC General purpose ZCT Insulated conductor	BNC Branch circuit ZCT Insulated conductor
Rated measurement current	5000 A AC/500 A AC	5000 A AC/500 A AC	5000 A AC/500 A AC	10 A AC	10 A AC
Output rate	0.1 mV/A (5000 A) 1 mV/A (500 A)	0.1 mV/A (5000 A) 1 mV/A (500 A)	0.1 mV/A (5000 A) 1 mV/A (500 A)	100 mV/A	100 mV/A
Amplitude accuracy (45 to 66 Hz)	$\pm 2\%$ rdg. $\pm 0.3\%$ f.s.*	$\pm 2\%$ rdg. $\pm 0.3\%$ f.s.*	$\pm 2\%$ rdg. $\pm 0.3\%$ f.s.*	$\pm 1.0\%$ rdg. $\pm 0.05\%$ f.s.	$\pm 1.0\%$ rdg. $\pm 0.005\%$ f.s.
Max. rated voltage to earth	(AC) CAT IV 600 V (AC) CAT III 1000 V	(AC) CAT IV 600 V (AC) CAT III 1000 V	(AC) CAT IV 600 V (AC) CAT III 1000 V	Insulated conductor	Insulated conductor
Operating temperature	-25°C to 65°C	-25°C to 65°C	-10°C to 50°C	0°C to 50°C	0°C to 50°C
Core jaw diameter	Φ 100 mm or less	Φ 180 mm or less	Φ 254 mm or less	Φ 40 mm or less	Φ 30 mm or less

*At center of flexible loop

1	EXTENSION CABLE L0220-01	2 m (6.56 ft.), for PL14 connectors
2	EXTENSION CABLE L0220-02	5 m (16.4 ft.), for PL14 connectors
3	EXTENSION CABLE L0220-03	10 m (32.81 ft.), for PL14 connectors
4	EXTENSION CABLE L0220-04	20 m (65.62 ft.), for PL14 connectors
5	EXTENSION CABLE L0220-05	30 m (98.43 ft.), for PL14 connectors
6	EXTENSION CABLE L0220-06	50 m (164.04 ft.), for PL14 connectors
7	EXTENSION CABLE L0220-07	100 m (328.08 ft.), for PL14 connectors
8	CONNECTION CABLE 9219	For 9695, 3 m (9.84 ft.)
9	AC ADAPTER 9445-02	For CT9667
10	CONVERSION CABLE L9910	To convert output connector: BNC to PL 14




Clamp
Insulation
DMMS
Detectors
Earth
Power quality
Power loggers
Battery
PV
Logger
LAN
Lux
Temperature
Resistance



BATTERY TESTER BT3554-50, BT3554-51, BT3554-52

Properly Diagnose Deterioration of UPS Lead-acid Batteries even Under Noisy Environments

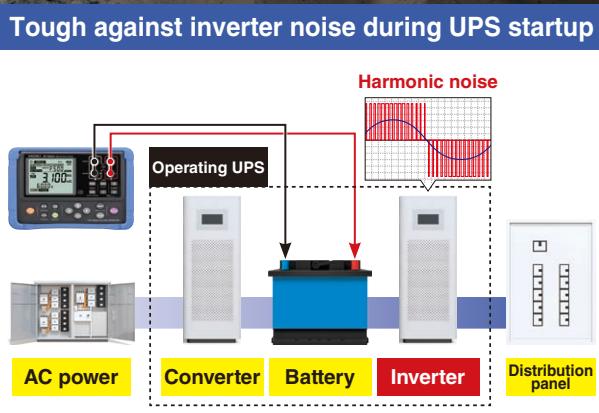

Completing an intensive inspection workload efficiently



BATTERY TESTERS



Product warranty for 3 years
Accuracy guaranteed for 1 year

BATTERY TESTER BT3554-50, BT3554-51, BT3554-52



BT3554-50: Instrument only

With Z3210



Please see www.hioki.com for list of supported regions.



Gennect Cross



BT3554-51: with 9465-10

With Z3210



Please see www.hioki.com for list of supported regions.



Gennect Cross



BT3554-52: with L2020

With Z3210



Please see www.hioki.com for list of supported regions.



Gennect Cross



WIRELESS ADAPTER
Z3210 (options): Attach to enable Bluetooth® wireless technology



Included accessories

- PIN TYPE LEAD 9465-10 (BT3554-51 only)
- PIN TYPE LEAD L2020 (BT3554-51 only)
- Carrying Case C1014
- Protector Z5041
- Fuse Set Z5050
- ZERO ADJUSTMENT BOARD
- Neck strap
- USB cable
- Power-on option sticker
- Alkaline battery LR6 x 8
- Instruction manual

Order code **BT3554-50** Instrument only

Order code **BT3554-51** With 9465-10

Order code **BT3554-52** With L2020



Order code **BT3554-91** With 9465-10, Z3210

Order code **BT3554-92** With L2020, Z3210

Order code **Z3210**

Options

- 1 PIN TYPE LEAD L2020
- 2 PIN TYPE LEAD 9465-10
- 3 PIN TYPE LEAD 9772
- 4 CLIP TYPE LEAD WITH TEMPERATURE SENSOR 9460
- 5 LARGE CLIP TYPE LEAD 9467
- 6 TIP PIN 9465-90 For L2020, 9465-90
- 7 TIP PIN 9772-90 For 9772
- 8 REMOTE CONTROL SWITCH 9466 2 m (6.56 ft.)
- 9 TEMPERATURE PROBE 9451
- 10 TEMPERATURE PROBE 9451-01
- 11 0 ADJ BOARD Z5038
- 12 FUSE SET Z5050 This contains 5 pieces
- 13 PROTECTOR Z5041
- 14 CARRYING CASE C1014

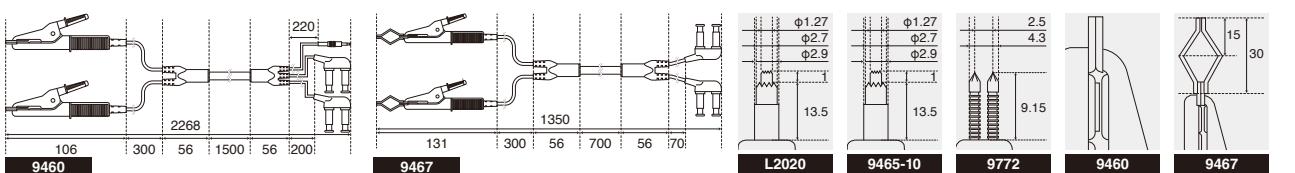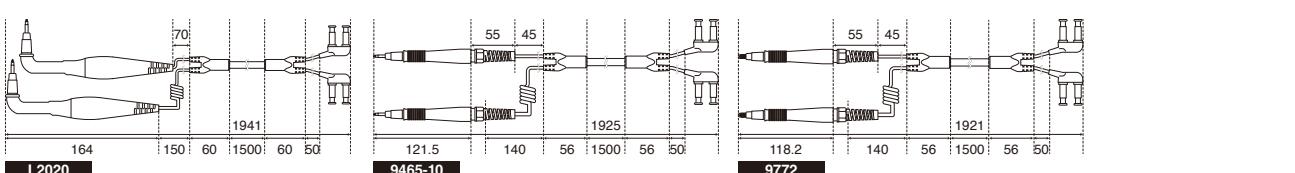



Measurement	Measurement parameters	Internal resistance measurement for batteries (AC four-terminal method) Terminal voltage measurement for batteries (DC voltage) Temperature measurement (when using the 9460)
	Range Accuracy	3 mΩ (Max. display: 3.100 mΩ, Resolution: 1 μΩ) 30 mΩ (31.00 mΩ, 10 μΩ) 300 mΩ (310.0 mΩ, 100 μΩ) 3 Ω (3.100 Ω, 1 mΩ) Accuracy: ±0.8% rdg. ±dgt.
Resistance	Measurement Current	160 mA (3 mΩ, 30 mΩ range) 16 mA (300 mΩ range) 1.6 mA (3 Ω range)
	Measurement frequency	1 kHz ±30 Hz (with function for avoiding noise frequency enabled: 1 kHz ±80 Hz)
Voltage		6.000 V, 60.00 V Accuracy: ±0.08% rdg. ±dgt.
Temperature		-10.0°C to 60.0°C Accuracy: ±1.0°C
Function		<ul style="list-style-type: none"> • Memory function (up to 6000 data) • Auto memory function • Auto-hold function • Measurement Navigator (When using Z3210, Gennect Cross: Voice guide output) • Tablet app (Gennect Cross) • PC app (Gennect One) • Comparator function (PASS/ WARNING/ FAIL) • Excel® Direct Input function (When using Z3210)
Other	Interfaces	USB2.0
	Operating temperature	0°C to 40°C, 80% RH or less (non-condensating)
	Storage temperature	-10°C to 50°C, 80% RH or less (non-condensating)
	Standards	EN61010 (Safety), EN61326 (EMC)
	Power supply	LR6 alkaline battery x 8
	Continuous operating time	8.5 hours
	Dimensions (W x H x D)	199 x 132 x 60.6 mm (7.83 x 5.20 x 2.39 in.)
	Weight	960 g (33.8 oz.)

The thresholds for determining the pass/fail condition of a battery depend on the specific needs and standards of the battery manufacturer, battery type, capacity, etc. It is important and necessary to always conduct battery testing against the internal resistance and terminal voltage of a new or reference battery. In some cases, it may be difficult to determine the deterioration state of traditional open type (liquid) lead-acid or alkaline batteries, which demonstrate smaller changes in internal resistance than sealed lead acid batteries.

PV Maintenance


Inspect Solar Panel Bypass Diodes for Opens and Shorts

Improve testing efficiency by first inspecting the PV string, then testing individual modules for issues

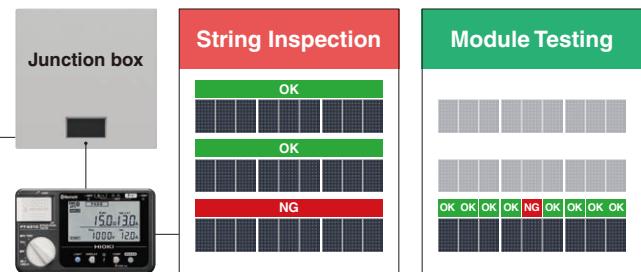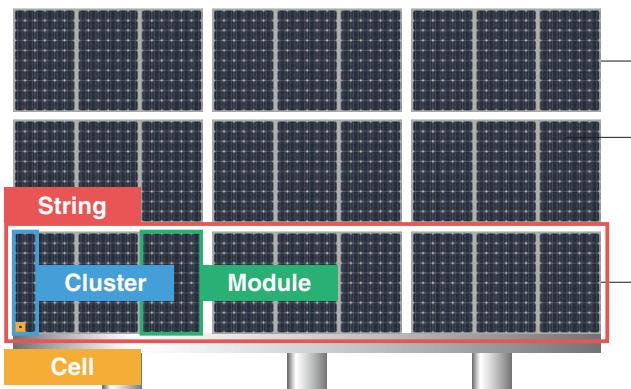


A FAIL decision will be output even if only one module within the string has malfunctioned. After identifying the problematic string, pinpoint the exact location by further inspecting at the module level.

- 1 RBPR: Bypass route resistance
- 2 Voc: Open-circuit voltage
- 3 Isc + α_1 : Measurement current
- 4 Isc: Short-circuit current



Normal reading



Open fault

Test open-circuit voltage, short-circuit current, and bypass route resistance at the same time



Short-circuit fault

Measure open-circuit voltage within 1 second and compare to reference value



Product warranty for 3 years
Accuracy guaranteed for 1 year

BYPASS DIODE TESTER FT4310

To be discontinued



Please see www.hioki.com for list of supported regions.



Gennect
Cross

Order code **FT4310**

Included accessories



L9788-11

C0206

- TEST LEAD SET WITH REMOTE SWITCH L9788-11
- CARRYING CASE C0206
- Instruction manual
- Alkaline battery LR6 x6

Options

1	TEST LEAD SET WITH REMOTE SWITCH L9788-11	1.2 m (3.94 ft.)
2	TEST LEAD WITH REMOTE SWITCH L9788-10	1.2 m (3.94 ft.)
3	TIP PIN L9788-90	For L9788, L9788-10
4	BREAKER PIN L9788-92	For checking breaker terminal
5	CARRYING CASE C0206	



L9788-11

L9788-10

L9788-90

L9788-92

C0206

*For detailed information about L9788, please refer to p.27

BPD TEST mode (Bypass diode)	
Measurement items	Bypass diode comparator judgment Bypass route resistor Open-circuit voltage Short-circuit current Measurement (applied) current
Measurement object	Crystal system string Open-circuit voltage: 1000 V DC or less Rated current: 2 A to 12 A DC
Measurement method	Short-circuit and pulse voltage application
Duration of shorting between terminals	10 ms or less
Output pulse	Voltage: 100 V DC or less, Pulse width: 5 ms or less Limiting current: Measured short-circuit current + 1 A or less, Maximum: 13 A
Voc mode (open-circuit voltage)	
Measurement items	Open-circuit voltage
Measurement range	0 V to 1000 V DC (displayed up to 1200 V DC)
Response time	Within 1 sec.
Functions	Displays the number of bypass diode measurements Automatic polarity judgment function Comparison display Live circuit indicator Comparator Auto hold Backlight Auto power off Buzzer sounds Battery indicator
Operating temperature	-10°C to 65°C, 80% RH or less (non-condensating)
Storage temperature	-20°C to 65°C, 80% RH or less (non-condensating)
Dustproof and waterproof	IP40 (EN60529)
Standards	EN61010 (Safety), EN61326 ClassA (EMC)
Maximum input voltage	1000 V DC
Power supply	LR6 alkaline battery x 6
Continuous operating time	45 hours (Bluetooth® OFF)
Dimensions (W x H x D)	152 x 92 x 69 mm (5.98 x 3.62 x 2.72 in.), Cable length 0.5m (1.64 ft.)
Weight	650 g (22.9 oz.)

Clamp

Insulation
DIMMS

Detectors
Earth

Power quality
Power loggers

Battery

PV

Logger
LAN


Lux
Temperature

Resistance

COMPACT DATA LOGGERS

Collect Data with Portable Transfer Devices

Use the LR5091 or LR5092 to capture data and upload to the PC for analysis



Model	HUMIDITY LOGGER LR5001	TEMPERATURE LOGGER LR5011	INSTRUMENTATION LOGGER LR5031	CLAMP LOGGER LR5051
Log	Temperature, Humidity	Temperature	4-20 mA Instrumentation Signals	Load Current, Leak Current
Appearance	To be discontinued 	To be discontinued 	To be discontinued 	To be discontinued
Channels	1ch (temperature), 1ch (humidity)	1ch	1ch	2ch
Measurement range	-40.0°C to 85.0°C (temperature) 0% RH to 100% RH (humidity)	-40.0°C to 180.0°C*1	-30.00 mA to 30.00 mA	0.00 A to 1000 A AC*1
Accuracy	±0.5°C (temperature) ±5% RH (humidity)	±0.5°C	±0.5% rdg. ±5 dgt.	±0.5% rdg. ±5 dgt.
Bundled sensor	HUMIDITY SENSOR LR9504	Sensor sold separately	CONNECTION CABLE LR9801	Sensor sold separately

Model	VOLTAGE LOGGER LR5041	VOLTAGE LOGGER LR5042	VOLTAGE LOGGER LR5043
Log	Instrumentation signals, Analog outputs		
Appearance	To be discontinued 	To be discontinued 	To be discontinued
Channels	1ch	1ch	1ch
Measurement range	-50.00 mV to 50.00 mV	-5.000 V to 5.000 V	-50.00 V to 50.00 V
Accuracy	±0.5% rdg. ±5 dgt.	±0.5% rdg. ±5 dgt.	±0.5% rdg. ±5 dgt.
Bundled sensor	CONNECTION CABLE LR9802	CONNECTION CABLE LR9802	CONNECTION CABLE LR9802

*1 Depends on current sensor in use

LR5000 Series Common Specifications

Measurement	Recording intervals Recording modes Storage capacity	1/2/5/10/15/20/30 sec., 1/2/5/10/15/20/30/60 min. Instantaneous value, MAX/MIN/AVG 60,000 data sets per channel (instantaneous value)
	Operating temperature	LR5001, LR5011, LR5031, LR5041, LR5042, LR5043: -20°C to 70°C, 80% RH or less LR5051: 0°C to 50°C, 80% RH or less
	Power supply	LR6 alkaline battery x1 LR5051: LR6 alkaline battery x2
Other	Continuous operating time	LR5001: 3 months (1min. recording interval), 20 days (1sec.) LR5011: 2 years (1min. recording interval), 2 months (1sec.) LR5051: 1 years (1min. recording interval), 1 month (1sec.) LR5031, LR5041, LR5042, LR5043: 2 years (1min. recording interval), 2 months (1sec.)
	Dimensions (W x H x D)	79 x 57 x 28 mm (3.11 x 2.24 x 1.10 in.) LR5051: 79 x 70 x 37 mm (3.11 x 2.76 x 1.46 in.)
	Weight	105 g (3.7 oz.), LR5051: 165 g (5.8 oz.)

Order code **LR5001** HUMIDITY SENSOR LR9504, Kickstand

Order code **LR5011** Kickstand

Order code **LR5031** CONNECTION CABLE LR9801, Kickstand

Order code **LR5041** CONNECTION CABLE LR9802, Kickstand

Order code **LR5042** CONNECTION CABLE LR9802, Kickstand

Order code **LR5043** CONNECTION CABLE LR9802, Kickstand

Order code **LR5051**

LR5000 Series Included accessories

- LR6 alkaline battery x 1 (LR5051: LR6 alkaline battery x 2)
- Instruction manual, Operation guide



Product warranty for 3 years
Accuracy guaranteed for 1 year

Make Logger Settings and Transfer Data via Bluetooth® Wireless Communication

Use your tablet or PC to download data and configure measurement conditions



Model	WIRELESS PULSE LOGGER LR8512	WIRELESS CLAMP LOGGER LR8513	WIRELESS HUMIDITY LOGGER LR8514	WIRELESS VOLTAGE/TEMP LOGGER LR8515
Log	Pulse	Load Current, Leak Current	Temperature, Humidity	DCV, Temperature
Appearance				
Channels	2ch	2ch	2ch (temperature), 2ch (humidity)	2ch
Measurement range	Pulse: 0 to 1000M pulse No. of revolutions: 0 to 5000/n ¹ [r/s]	500.0 mA to 5000 A AC ² 10.00 A to 2000 A DC ²	-40.0°C to 80.0°C (temperature) 0.0% rh to 100% RH (humidity)	Voltage: -50 V to 50 V Thermocouple (K): -200°C to 999.9°C Thermocouple (T): -200°C to 400°C
Accuracy	-	±0.5% rdg. ±5 dgt.	Temperature: ±0.5°C Humidity: ±3% RH ³	Voltage: ±0.05 mV Thermocouple: ±0.6°C
Bundled sensor	CONNECTION CABLE L1010	Sensor sold separately	Sensor sold separately	Sensor sold separately

¹n is the number of pulses, 1 to 1000, per revolution. ²Depends on current sensor in use ³Hysteresis: ±1% rh (added to the humidity measurement accuracy).

LR8512, LR8513, LR8514, LR8515 Common Specifications

Measurement	Recording intervals	0.1 ¹ /0.2 ¹ /0.5 ¹ /1 ² /5 ¹ /10 ² /20 ² /30 ² sec., 1/2/5/10/20/30/60 min.
	Recording modes	Instantaneous value, MAX/MIN/AVG (LR8513 only)
	Communication reaches	30 m, line of sight
	Storage capacity	500,000 data sets per channel
	Operating temperature	-20°C to 60°C, 80% RH or less
	Power supply	LR6 alkaline battery x 2 AC ADAPTER Z2003 (option, DC12V)
Other	Continuous operating time ²	LR8512: 2 months (1min. recording interval), 2 months (1sec.) LR8513: 3 months (1min. recording interval), 1 month (1sec.) LR8514: 3.5 months (1min. recording interval), 3 months (1sec.) LR8515: 2.5 months (1min. recording interval), 10 days (1sec.)
	Dimensions (W x H x D)	LR8512, LR8514: 85 x 61 x 31 mm (3.35 x 2.40 x 1.22 in.) LR8513, LR8515: 85 x 75 x 38 mm (3.35 x 2.95 x 1.50 in.)
	Weight	LR8512, LR8514: 95 g (3.4 oz.), LR8513: 130 g (4.6 oz.), LR8515: 126 g (4.4 oz.)

¹LR8512, LR8515 only ²With Bluetooth® communication OFF

Order code **LR8512** CONNECTION CABLE L1010 x 2

Order code **LR8513** -

Order code **LR8514** -

Order code **LR8515** -

Included accessories for LR8512, LR8513, LR8514, LR8515

- LR6 alkaline battery x 2
- Measurement Guide, Caution for Using Radio Waves


Wireless Logger Collector (for collecting measurement data)

Supported devices	Android tablet, Android smartphone Windows PC
OS	Android OS 4.0.3 or later Windows 11/10
Number of available registrations	Max. 100 units
Output format	Logger Utility format LR5000 format Smart Site compatible format CSV format Text format

How to obtain software

For Windows PC: download from the HIOKI website
For Android tablet: Google Play™

Use Logger Utility to view data acquired by the Wireless Logger Collector

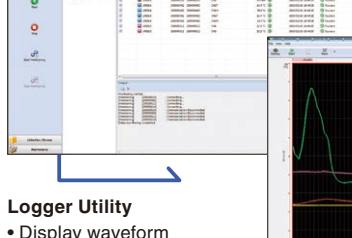

Options



HUMIDITY LOGGER LR5001

1	HUMIDITY SENSOR LR9501	1 m (3.28 ft.)
2	HUMIDITY SENSOR LR9502	5 m (16.4 ft.)
3	HUMIDITY SENSOR LR9503	10 m (32.81 ft.)
4	HUMIDITY SENSOR LR9504	4 cm (1.57 in.)



TEMPERATURE LOGGER LR5011

5	TEMPERATURE SENSOR LR9601	Molded plastic type, 1 m (3.28 ft.)
6	TEMPERATURE SENSOR LR9602	Molded plastic type, 5 m (16.4 ft.)
7	TEMPERATURE SENSOR LR9603	Molded plastic type, 10 m (32.81 ft.)
8	TEMPERATURE SENSOR LR9604	Molded plastic type, 4.5 cm (1.77 in.)
9	TEMPERATURE SENSOR LR9611	Lug type, 1 m (3.28 ft.)
10	TEMPERATURE SENSOR LR9612	Lug type, 5 m (16.4 ft.)
11	TEMPERATURE SENSOR LR9613	Lug type, 10 m (32.81 ft.)
12	TEMPERATURE SENSOR LR9621	Sheathed type, 1 m (3.28 ft.)
13	TEMPERATURE SENSOR LR9631	Needle type, 1 m (3.28 ft.)



INSTRUMENTATION LOGGER LR5031

14	CONNECTION CABLE LR9801	1 m (3.28 ft.), 2 wires
----	-------------------------	-------------------------

VOLTAGE LOGGER LR5041, LR5042, LR5043, PULSE LOGGER LR5061

15	CONNECTION CABLE LR9802	1 m (3.28 ft.), 4 wires
----	-------------------------	-------------------------

LR5000 Series

16	WALL-MOUNTED HOLDER LR9901	Cannot be used with LR5051
----	----------------------------	----------------------------

DATA COLLECTOR LR5092

18	SD MEMORY CARD 2GB Z4001	Use only SD Cards sold by HIOKI. Compatibility and performance are not guaranteed for PC cards made by other manufacturers.
----	--------------------------	-----------------------------------------------------------------------------------------------------------------------------

WIRELESS PULSE LOGGER LR8512

1	CONNECTION CABLE L1010	1.5 m (4.92 ft.)
---	------------------------	------------------

WIRELESS HUMIDITY LOGGER LR8514

2	HUMIDITY SENSOR Z2010	50 mm (1.97 in.)
---	-----------------------	------------------

3	HUMIDITY SENSOR Z2011	1.5 m (4.92 ft.)
---	-----------------------	------------------

WIRELESS LOGGER Series LR8512, LR8513, LR8514, LR8515

4	AC ADAPTER Z2003	100 V to 240 V AC
---	------------------	-------------------

5	MAGNETIC STRAP Z5004	
---	----------------------	--

6	MAGNETIC STRAP Z5020	Extra strength
---	----------------------	----------------



¹ At center of flexible loop

² Maximum measurable current when used with the LR8513, LR5051

CURRENT SENSORS (For LR8513, LR5051)

Measurement application

Model name	CLAMP ON SENSOR			AC FLEXIBLE CURRENT SENSOR		
	9669	9695-02	CT6500	CT9667-01	CT9667-02	CT9667-03
Appearance	BNC	Requires the 9219 Insulated conductor Not CE marked	BNC	BNC	BNC	BNC
Rated measurement current	1000 A AC	50 A AC	500 A AC	5000/500 A AC	5000/500 A AC	5000/500 A AC
Output rate	0.5 mV/A	10 mV/A	1 mV/A AC	0.1 mV/A (5000 A) 1 mV/A (500 A)	0.1 mV/A (5000 A) 1 mV/A (500 A)	0.1 mV/A (5000 A) 1 mV/A (500 A)
Amplitude accuracy (DC, 45 to 66 Hz)	±1.0% rdg. ±0.01% f.s.	±0.3% rdg. ±0.02% f.s.	±1.5% rdg. ±0.03% f.s.	±2% rdg. ±0.3% f.s. ¹	±2% rdg. ±0.3% f.s. ¹	±2% rdg. ±0.3% f.s. ¹
Max. rated voltage to earth	CAT III 600 V	CAT III 300 V	CAT III 600 V	CAT IV 600 V CAT III 1000 V	CAT IV 600 V CAT III 1000 V	CAT IV 600 V CAT III 100 V
Operating temperature	0°C to 50°C	0°C to 50°C	0°C to 50°C	-25°C to 65°C	-25°C to 65°C	-10°C to 50°C
Core jaw diameter	Φ55 mm or less 80 x 20 mm busbar	Φ15 mm or less	Φ46 mm or less	Φ100 mm or less	Φ180 mm or less	Φ254 mm or less

Measurement application

Model name	For leak current: Voltage output			For CLAMP ON SENSOR 9695-02		
	CLAMP ON LEAK SENSOR			CONNECTION CABLE 9219 For 9695, 3 m (9.84 ft.)		
Model	9657-10	9675				
Appearance	BNC	BNC		9219		
Rated measurement current	5 A AC ²	5 A AC ²				
Output rate	100 mV/A	100 mV/A				
Amplitude accuracy (DC, 45 to 66 Hz)	±1.0% rdg. ±0.05% f.s.	±1.0% rdg. ±0.005% f.s.				
Max. rated voltage to earth	Insulated conductor	Insulated conductor				
Operating temperature	0°C to 50°C	0°C to 50°C				
Core jaw diameter	Φ40 mm or less	Φ30 mm or less				



For CLAMP ON SENSOR 9695-02

CONNECTION CABLE 9219 For 9695, 3 m (9.84 ft.)



The following sensors can be used with Model LR8513 via the DISPLAY UNIT CM7290 (requires OUTPUT CORD L9095)	
• AC/DC CURRENT SENSOR CT7631	: Φ33 mm, 100 A
• AC/DC CURRENT SENSOR CT7636	: Φ33 mm, 200 A*
• AC/DC CURRENT SENSOR CT7642	: Φ55 mm, 2000 A
• AC/DC AUTO-ZERO CURRENT SENSOR CT7731	: Φ33 mm, 100 A
• AC/DC AUTO-ZERO CURRENT SENSOR CT7736	: Φ33 mm, 200 A*
• AC/DC AUTO-ZERO CURRENT SENSOR CT7742	: Φ55 mm, 2000 A
• AC FLEXIBLE CURRENT SENSOR CT7044	: Φ100 mm, 5000 A*
• AC FLEXIBLE CURRENT SENSOR CT7045	: Φ180 mm, 5000 A*
• AC FLEXIBLE CURRENT SENSOR CT7046	: Φ254 mm, 5000 A*

* Maximum measurable current when used with the LR8513.
For more details, please refer to our website.

LAN Cable Testers

LAN CABLE HiTESTER 3665




Product warranty for 3 years
Accuracy guaranteed for 1 year




Included accessories

- TERMINATOR 9690 (ID 0)
- Carrying case
- LR6 alkaline battery x 2
- Instruction manual



Display wire map, cable length, and ID of connected terminal



Pins 3 and 6 have been incorrectly paired with Pins 4 and 5

Order code **3665**



9690-01
9690-02
9690-03
9690-04

9249

Measurement	Measurable cable	Twisted-pair cable, characteristic impedance: 100 Ω, shielded and unshielded, CAT 3, 4, 5, 5e, 6 and 6A *Not available for CAT 7
	Compatible connectors	RJ-45 plugs
	Wire Map test (detectable errors)	Open, short, reversed, transposed, split pairs and other incorrect wiring
	Measurement parameters	Cable length 2.0 to 300.0 m Accuracy: ±4% rdg. ±1 m (in case of single line)
	Direction	Up to 21 cables can be identified ¹
	Functions	Backlight, auto power off
	Operating temperature	0°C to 40°C, 80% rh or less (non-condensating)
	Storage temperature	-10°C to 50°C, 80% rh or less (non-condensating)
	Standards	EN61010 (Safety), EN61326 (EMC)
	Power supply	LR6 alkaline battery x 2
	Continuous operating time	50 hours
	Dimensions (W x H x D)	85 x 130 x 33 mm (3.35 x 5.12 x 1.30 in.)
	Mass	160 g (5.6 oz.)

¹Using the supplied Terminator 9690 and optional Models 9690-01 to 9690-04

Options	
1	TERMINATOR 9690-01 ID 1 to 5
2	TERMINATOR 9690-02 ID 6 to 10
3	TERMINATOR 9690-03 ID 11 to 15
4	TERMINATOR 9690-04 ID 16 to 20
5	CARRYING CASE 9249

Lux Testers



LUX METER FT3424, FT3425

Product warranty for 3 years
Accuracy guaranteed for 2 years



FT3424



FT3425



Please see www.hioki.com for list of supported regions.



Gennect Cross



Extension cart minimizes physical stress



- Extension cart minimizes physical stress
- Built-in Bluetooth® wireless technology
- Verify and record measured data with free Gennect Cross mobile app

*Available only with products displayed with the Gennect Cross icon

Order code **FT3424**

Order code **FT3425**

Standards	DIN 5032-7: 1985 Class B, JIS C 1609-1: 2006 General Class AA
Light receiving element	Silicon photo-diode
Measurement ranges	20.00 lx, 200.0 lx, 2000 lx, 20000 lx, 200000 lx
Linearity	±2% rdg. ¹⁾
D/A output	Output level: 2 V/range f.s. Output accuracy: ±1% rdg. ±5 mV (at output rate)
Functions	Timer hold function, memory function (up to 99 measured data can be saved.), hold, auto power off, buzzer sound, backlight, zero adjustment
Interfaces	USB2.0 (FT3425 only: Bluetooth® 4.0 LE)
Operating temperature	-10°C to 40°C, 80% RH or less (non-condensating)
Storage temperature	-20°C to 50°C, 80% RH or less (non-condensating)
Accuracy guarantee for temperature and humidity	21°C to 27°C, 75% RH or less (non-condensating)
Dustproof and waterproof	IP40 (EN60529)
Other	EN61010 (Safety), EN61326 (EMC), JIS C 1609-1: 2006 General Class AA, DIN 5032-7: 1985 Class B
Standards	LR6 alkaline battery x 2, or USB bus power (5 V DC) Continuous operating time 300 hours (Bluetooth® communication OFF)
Power supply	Dimensions (W x H x D) 78 x 170 x 39 mm (3.07 x 6.69 x 1.54 in.)
Order code	Weight FT3424: 310 g (10.9 oz.), FT3425: 320 g (11.3 oz.)

¹⁾ Multiply by 1.5 for display values in excess of 3000 lx.

Options

1 EXTENSION CART Z5023	
2 CONNECTION CABLE L9820	
3 CARRYING CASE C0202	Soft case
4 CARRYING CASE C0201	Semi-hard case
5 OUTPUT CORD L9094	Mini plug to banana 1.5 m (4.92 ft.)
6 OUTPUT CORD L9095	Connect to BNC terminal 1.5 m (4.92 ft.)
7 OUTPUT CORD L9096	Connect to terminal block 1.5 m (4.92 ft.)




L9820



C0202



C0201



L9094



L9096

Included accessories

- CARRYING CASE
- LR6 alkaline battery x 2
- Sensor cap (with strap)
- Strap
- USB cable (0.9 m)
- Instruction manual
- Precautions concerning use of equipment that emits radio waves (only FT3425)

Temperature Testers



INFRARED THERMOMETER FT3700-20, FT3701-20


Product warranty for 1 year
Accuracy guaranteed for 1 year




FT3700



FT3701




Measure the average temperature inside a circle whose diameter is defined by the two indicated points.



Measure areas that cannot be touched or unreachable locations due to moving parts

Order code **FT3700-20**

Order code **FT3701-20**

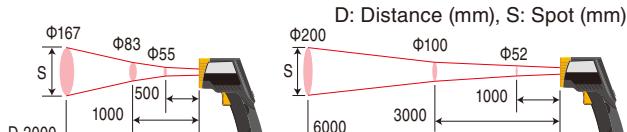

D : S = 12 : 1

FT3700

D : S = 30 : 1

FT3701

Standards	FT3700: -60.0 to 550.0°C (-76 to 1022°F) FT3701: -60.0 to 760.0°C (-76 to 1400°F)
Accuracy	0.0 to 100.0°C (-32.0 to 212.0°F): ±2°C 100.1 to 500.0°C (212.1 to 932.0°F): ±2% rdg. -35.0 to -0.1°C (-31.0 to 31.9°F): ±10% rdg. ±2°C ²⁾
Measurement field diameter	FT3700: Ø83 mm at 1000 mm FT3701: Ø100 mm at 3000 mm
Functions	MAX/MIN/DIF (MAX-MIN)/AVG measurement, alarm, backlight, continuous measurement mode, auto power off
Other	Operating temperature 0°C to 50°C, 80% RH or less (non-condensating) Storage temperature -10°C to 50°C, 80% RH or less (non-condensating) 50°C to 60°C, 70% RH or less (non-condensating) Accuracy guarantee for temperature and humidity 23°C ±3°C, 80% RH or less (non-condensating) Standards IEC 60825-1 CLASS2 (Laser), EN61326 (EMC) Power supply LR03 alkaline battery x 2 Continuous operating time 140 hours Dimensions (W x H x D) 48 x 172 x 119 mm (1.89 x 6.77 x 4.69 in.) Weight 256 g (9.0 oz.)

¹⁾ Guaranteed accuracy range is -35 to 500°C.

²⁾ -60.0 to -35.1°C (-76.0 to -31.1°F): Accuracy not specified

Resistance meter

RESISTANCE METER RM3548-50



Product warranty for 3 years
Accuracy guaranteed for 1 year



The RM3548-50 offers effortless operation and accuracy, making it ideal for EV maintenance, aircraft overhaul, and motor inspections.



Bluetooth® communication enables seamless data integration with mobile apps or Excel®, speeding up data sharing and report creation.

With Z3210



Please see www.hioki.com for list of supported regions.



Order code **RM3548-50**

Order code **Z3210**

Included accessories

- Clip Type Lead L2107
- Temperature Sensor Z2002
- Protector Z5041
- LR6 alkaline battery × 8
- Instruction manual
- USB cable (A to mini-B)
- Strap
- Spare fuse

Options

1 TEST LEADS L2140	
2 PIN TYPE LEAD L2141	
3 PIN TYPE LEAD L2142	
4 PIN TYPE LEAD 9465-10	
5 PIN TYPE LEAD 9465-11	
6 PIN TYPE LEAD 9772	
7 FOUR TERMINAL LEAD 9453	
8 LARGE CLIP TYPE LEAD 9467	tip φ 28 mm (1.10 in.)
9 CLIP TYPE LEADS L2107	
10 TIP PIN 9465-90	To replace the tip on the 9465-10, 9465-11, L2140 (one piece)
11 PIN TYPE LEAD 9772-90	To replace the tip on the 9772 (one pin)
12 TEST LEAD (RED) L2140-01	L2140 red lead
13 TEST LEAD (BLACK) L2140-02	L2140 black lead
14 TEMPERATURE SENSOR Z2002	100 mm (3.94 in.)
15 LED COMPARATOR ATTACHMENT L2105	2 m (78.74 in.)
16 ZERO ADJUSTMENT BOARD 9454	For 9465-10 and 9465-11
17 0 ADJ BOARD Z5038	For 9465-10, and 9772
18 PROTECTOR Z5041	
19 CARRYING CASE C1015	Hard case

Measurement parameters	Resistance measurement, temperature measurement
Measurement method	Resistance: DC four-terminal method, Temperature: thermistor
Resistance range	3 mΩ (3.5000 mΩ display max., 0.1 μΩ resolution) to 3 MΩ range (3.5000 MΩ display max., 100 Ω resolution), 10 steps
Temperature measurement	Measurement accuracy: ±0.020 % rdg. ±0.007 % f.s.
Operating temperature and humidity range	-10.0°C to 99.9°C, accuracy: ±0.5°C (temperature Sensor Z2002 and RM3548-50 combined accuracy)
Storage temperature and humidity range	0°C to 40°C (32°F to 104°F), 80% RH or less (non-condensing)
Applicable standards	EN61010 (safety), EN61326 (EMC)
Circuit protection	The circuit is protected until 42.4 V peak AC, 60 V DC is reached
Memory storage	Number of recordable data points: up to 1,000 for manual/auto, up to 6,000 for interval; interval: 0.2 s to 10.0 s (0.2 s step); acquisition of data from memory: display, USB mass storage (CSV, TXT files)
Communication functions	USB, wireless communications via Bluetooth® (Z3210 is necessary)
Power supply	LR6 alkaline battery × 8 or HR6 nickel-metal hydride battery × 8
Maximum rated voltage	5 VA
Continuous operating time	Approx. 10 hours (when eight fresh LR6 alkaline batteries or eight HR6 nickel-metal hydride batteries are used)
Dimensions (W × H × D)	199 × 132 × 60.6 mm (7.83 × 5.20 × 2.39 in.)
Weight	890 g (31.4 oz.)



Measurement Lead Selection Guide
For detailed dimensions, features, and measurement target information, please refer here.



Product Warranties

Hioki products are generally covered by a three-year warranty.

Product warranty	In the event Hioki is responsible for the failure of a product during the warranty term beginning on the date of purchase (or beginning in the month the product was manufactured if the date of purchase is unclear), we will repair or replace the product free of charge.
Warranty scope	We check products on a standalone basis to verify their specifications, performance, and functionality. Although we verify proper operation of components that are connected to Hioki products in standard configurations, we ask that customers verify proper operation of their Hioki products when connected to other manufacturers' products. The scope of Hioki's warranty is limited to Hioki products. Connected devices and issues caused by connected devices are considered outside the scope of the warranty. In the event of physical damage, any compensation that might be provided by Hioki is limited to the purchase price of the product.
Accuracy guarantee	For products with an accuracy guarantee, we guarantee the level of accuracy indicated in the specifications for a certain period of time following shipment from the factory. In the event of an accuracy defect during that period of time, we will adjust the product free of charge.


After-sales Service

Standard Calibration	If measured values fail to meet Hioki's standards during a calibration performed by Hioki ("Standard Calibration"), the instrument will be adjusted to meet the standards, and the calibration will then be repeated. For supported products, please refer to the "Service Information by Product" section on our website. Except for certain products, the company recommends that each product's accuracy guarantee period be treated as the recommended calibration interval. If a customer reports a loss of accuracy after Standard Calibration while the instrument in question is covered by the recommended calibration interval and we are able to verify the issue, we will adjust the instrument free of charge.
ISO/IEC 17025 Calibration (JCSS)	After Standard Calibration, we perform calibration based on ISO/IEC 17025. Hioki Headquarters is an international MRA-compliant, JCSS-accredited calibration service provider that meets ISO/IEC 17025 requirements. A JCSS calibration certificate bearing the JCSS symbol, compliant with the international MRA framework, is issued as internationally recognized proof of calibration. For details about which products are eligible for this service, please contact us. Note that the service is limited to the JCSS-accredited field of calibration. You can check the JCSS-accredited field of calibration on our website under Service for Calibration and Adjustment > ISO/IEC 17025 Calibration (JCSS) > JCSS certificate and scope of accreditation(English).
Repair	All faults reported by the customer will be repaired. Standard calibration is first conducted as a pre-repair diagnostic procedure, followed by standard calibration or adjustment/calibration after the repair. In some cases, pre-repair calibration may not be possible depending on the type of repair required. For supported products, please refer to the "Service Information by Product" section on our website. If within six months of the original repair, Hioki is responsible for an issue requiring an additional repair (a repair of the same issue) of a product that has been used as described in its user manual. We will repair it free of charge.

Warranty coverage after each service does not apply to issues suspected to be caused by factors such as component lifespan and degradation, equipment damage, or problems related to usage or storage conditions.

The calibration validity period (calibration interval) should be determined by each customer, taking into account the calibration interval recommended by the company.

Quality of Hioki's calibration and repair service

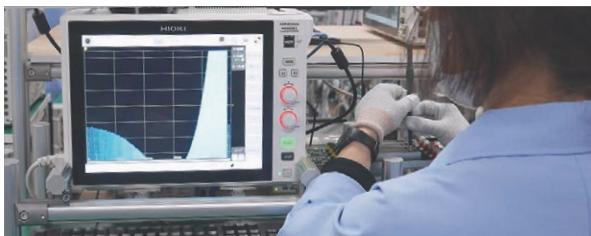

90 years of history and fine-grained, expert service

Technicians performing calibration, adjustment, and repair work undergo in-house training to ensure they possess the specialized expertise and skills that such work demands.

Precise calibration and adjustment guidelines compiled by product designers

We determine everything from the procedures for measuring instrument functionality checks to calibration points based on the results of reviews conducted by designers who are well versed in the characteristics of products' internal circuitry and the principles that underlie their operation. In this way, we are able to provide optimal, extensive calibration and adjustment service as only the manufacturer can.


Highly reliable service that's traceable to national standards

The standard devices we use to calibrate and adjust products are all linked to national standards, ensuring that we can issue inspection reports with accurate, reliable calibrated values.

Comprehensive calibration and repair service with fast turnaround

If we discover a malfunction or failure during the calibration process, we'll contact you to let you know where the problem is and what's necessary to address it. If you wish, we'll then repair the product. This capability eliminates unnecessary back-and-forth so you can put your product back to work as soon as possible.

Traceability Sample

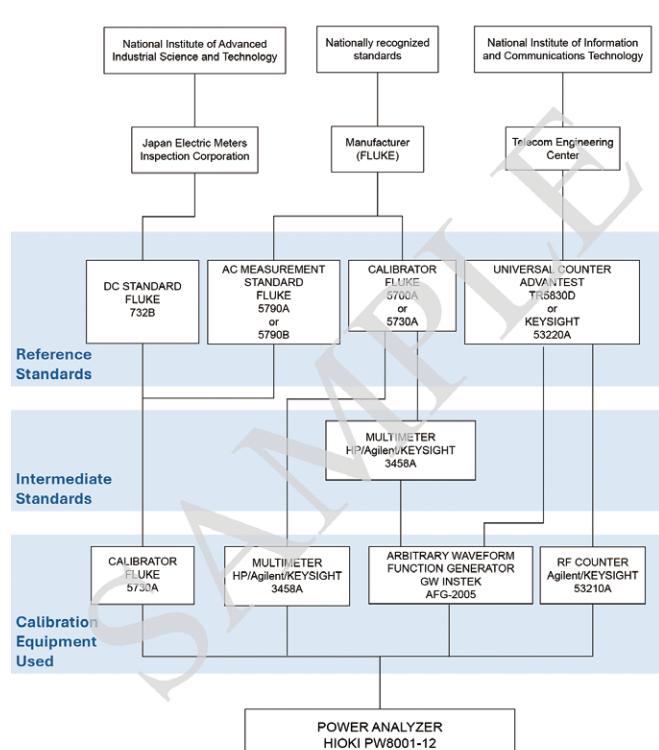

Calibration and Repair Service

(1) Service content

Calibration Services


When an instrument is calibrated and its measured values are found not to satisfy internal Hioki standards, the instrument is adjusted. Through the ongoing use of calibration services offered as only an instrument manufacturer can, customers are able to use their instruments with peace of mind while maintaining their precision.

This calibration service will allow us to return products to customers with minimal downtime, since there are no work interruptions.

Notes

*If you do not wish your instrument to be adjusted, please let us know when you request calibration. Your product will be returned without adjustment, even if the calibration report indicates a FAIL judgment (non-compliance).

*This service does not extend to products that cannot be adjusted or to discontinued products.

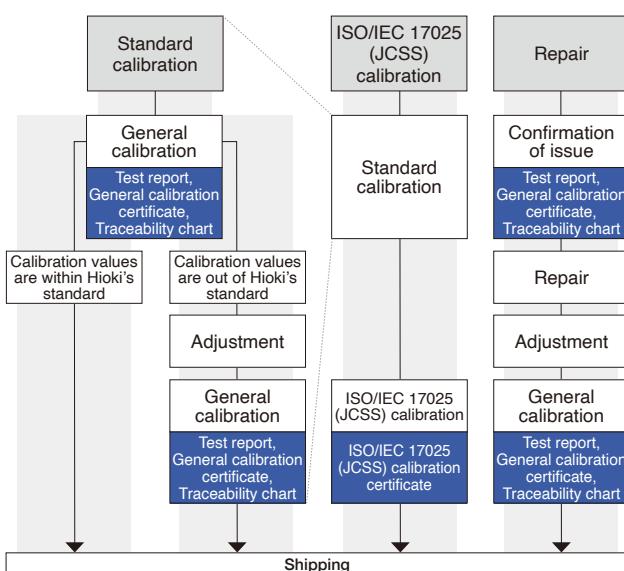

Depending on the type of repair, standard calibration may not be possible in advance.

(2) Documents we can issue and their content

Sample documents are also available on Hioki's website.



- Calibration results
- Judgment



- Calibration certificate declaration
- Information about equipment used in calibration



An overview tracing Hioki product groups to national standards via individual standard devices



A detailed diagram tracing a particular product model to national standards via individual standard devices



- Calibration results
- Inaccuracies
- Coverage factor
- Calibration certificate declaration
- ilac-MRA, IA Japan, and JCSS logos

Calibration

Calibration provides a way to check the condition of a measuring instrument by comparing the ideal value indicated by a standard device with the value indicated by the instrument being calibrated.

Adjustment

Calibration values will be optimized so that the instrument satisfies Hioki's internal standards.

If an instrument is adjusted as part of calibration service

Values are optimized so that they satisfy Hioki's internal standards to reduce the risk that they will subsequently exceed the tolerance.

Adjustment is performed since the tolerance is anticipated to be exceeded during the next calibration.



ISO/IEC 17025 Calibration (JCSS)

When is JCSS necessary?

JCSS calibration is the solution when you need calibration that includes inaccuracy data, for example ISO/IEC 17025 calibration, ILAC calibration, MRA calibration, or IATF 16949 calibration.

Specific examples:

Calibration of instruments used by automobile (or motorcycle) manufacturers and part suppliers

Calibration of instruments used in UL product certification

Calibration of instruments as required by Japanese law (for radiation therapy) or ministerial ordinance (for pharmaceuticals and quasi-drugs)

JCSS calibration and international MRAs

JCSS is a registration program designed to ensure that calibration service providers possess the technological skills needed to perform calibration that complies with measurement-related laws and the requirements imposed by ISO/IEC 17025.

Registered service providers are entitled to perform JCSS calibration and issue calibration certificates bearing the JCSS symbol mark. Such certificates serve as evidence of the calibration service provider's technological skills and traceability. JCSS calibration service providers who have been certified as international MRA-compliant can issue calibration certificates bearing the ILAC-MRA and IA Japan symbol marks. Such certificates can be used as official documents whose validity is recognized worldwide.

International MRAs

An MRA is a mutual recognition agreement. IA Japan belongs to ILAC and APAC which includes NVLAP, A2LA, UKAS, DAkkS, and NATA. Calibration certificates issued by calibration service providers that have been certified as MRA-compliant by IA Japan are treated as equivalent to calibration certificates recognized by member certification entities in member countries.

Service capability and warranty duration

You can find out whether Hioki accepts repair and calibration requests for your instrument, associated lead times if so, and the information listed below simply by entering the product model number on Hioki's website.

Product Search		Search	Availability of repair and calibration service	
Results		Available: ✓ Not available: ✗ Partially available (see remarks)		
Model	Product	Available Services	Discontinued date	Calibration Repair
DT4256	DIGITAL METER	✓	2024-06-30	✓
			Recommended calibration interval: 12 months	Product warranty period: 36 months


Calibration Interval

Product warranty period

Date production discontinued

Sales and service network

● HQ ● Regional Group HQ ● Offices of Group Companies

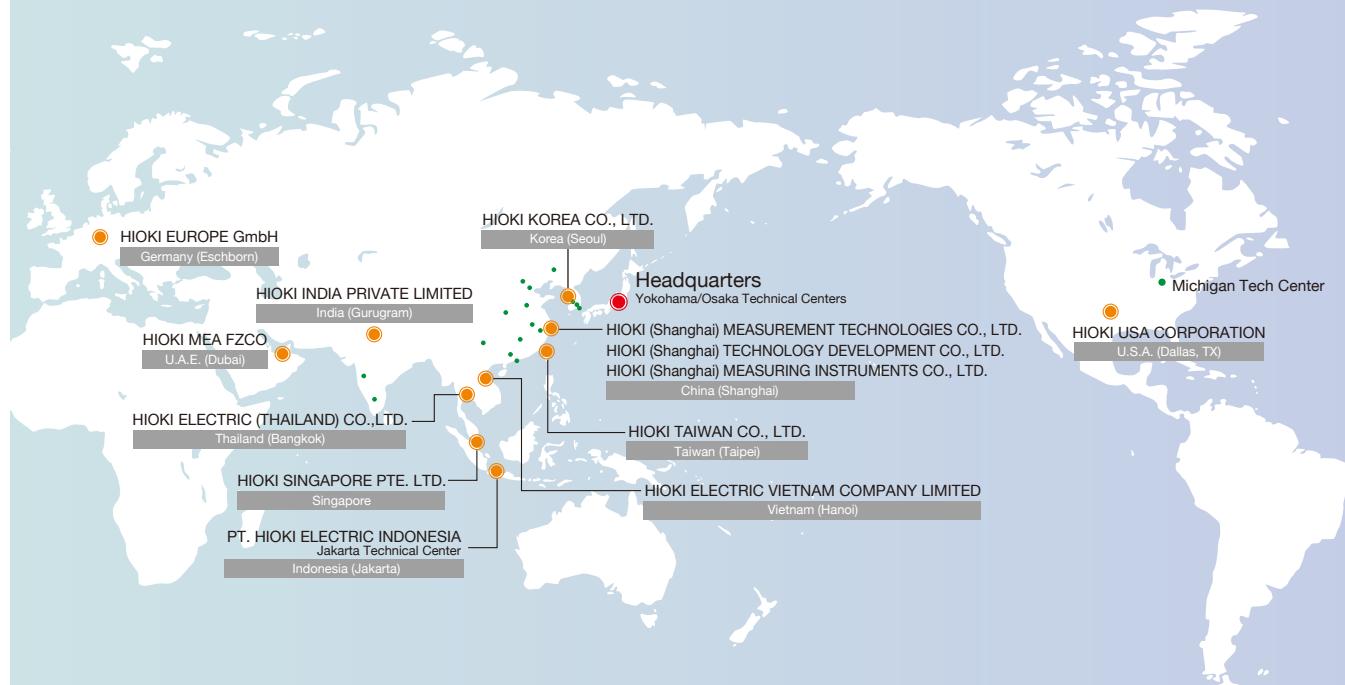

Our knowledgeable staff are always happy to assist you at Hioki group offices.

Feel free to contact local tech centers or sales offices
if you have any questions or need support.

What we offer:

- Expert consultation to help enhance your measurement accuracy
- Product training tailored to your specific applications
- Hands-on measurement of your Devices Under Test (DUTs)
- Integrated use of our measuring instruments for advanced applications

*The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by HIOKI E.E. CORPORATION is under license. Note: company names and product names appearing in this brochure are trademarks or registered trademarks of various companies.

HIOKI
HIOKI E.E. CORPORATION

81 Koizumi,
Ueda, Nagano 386-1192 Japan
<https://www.hioki.com/>



DISTRIBUTED BY